

# HFSM-Series High Flow Steel Muffler


HFSM-Series steel muffler utilize a 50 mesh, self-cleaning STAINLESS STEEL SCREEN in a tough steel shell to withstand shock and continuous heavy duty use in all applications. All stainless steel models are also available.

Designed with evenly distributed small holes around the steel shell, exhaust air quietly disperses over a 360 degree pattern without restricting air flow. Their SLIM profile allows them to be installed anywhere space is limited. Install directly to the exhaust ports of pneumatic valves, or closely spaced manifold ports is possible without interference with other ports.

Unit should be mounted in a protective position free from excessive vibration. Use wrench on hex head to tighten unit to the exhaust ports of air-operated equipment.





### SYMBOL



### California Proposition 65 Warning

**WARNING:** This product can expose you to chemicals, including lead, which is known to the state of California to cause Cancer, Birth Defects or other reproductive harm. For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

## FLOW CHARACTERISTICS - HIGH FLOW STEEL MUFFLER

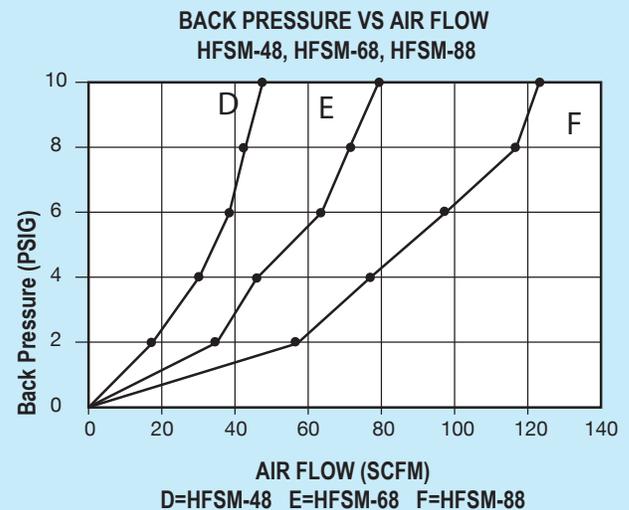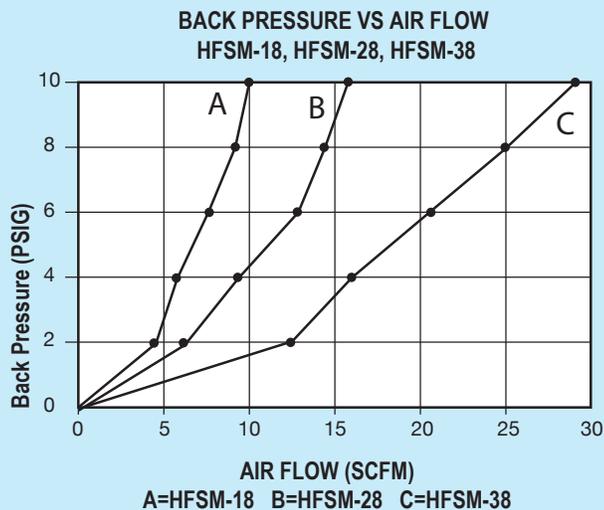

©2019 Adsens Tech. All Rights Reserved.

\* All tests are performed by Consolidated Laboratories, Inc.

## SOUND CHARACTERISTICS - STEEL MUFFLER

BACK PRESSURE (PSIG)	HFSM-18		HFSM-28		HFSM-38		HFSM-48		HFSM-68		HFSM-88	
	FLOW (SCFM)	db										
2	4.25	73.0	5.97	70.0	12.36	71.5	18.12	70.0	34.11	82.0	55.75	85.5
4	5.86	78.0	9.47	76.5	15.79	77.0	30.45	74.5	43.37	84.5	75.57	86.0
6	7.40	81.5	12.10	80.0	20.17	80.5	35.61	77.0	62.08	84.5	97.69	86.0
8	8.70	83.5	14.20	82.0	24.86	83.5	42.26	78.0	70.85	85.5	115.59	86.5
10	10.10	86.5	16.00	83.5	28.51	86.0	47.95	80.0	80.61	88.0	127.00	85.5

©2019 Adsens Tech. All Rights Reserved.

\*All tests are performed by Consolidated Laboratories, Inc.

# HFSSM-Series, High Flow Steel Muffler



### HOW TO ORDER

**HFSSM**      —             —     

**High Flow Steel Muffler**      Connection (NPTM)      Port Option

18 = 1/8", 28 = 1/4", 38 = 3/8"  
 48 = 1/2", 68 = 3/4", 88 = 1"  
 128 = 1-1/4", 148 = 1-1/2", 200 = 2"  
 None = NPT  
 P = BSPT

### SPECIFICATIONS

ITEM	MODEL	HFSSM-18	HFSSM-28	HFSSM-38	HFSSM-48	HFSSM-68	HFSSM-88	HFSSM-128	HFSSM-148	HFSSM-200
CONNECTION	NPTM	1/8"-27	1/4"-18	3/8"-18	1/2"-14	3/4"-14	1"-11.5	1-1/4"-11.5	1-1/2"-11.5	2"-11.5
OVERALL LENGTH	IN.	1-5/16"	1-11/16"	2-7/64"	2-41/64"	3-15/64"	3-25/32"	4-27/64"	4-15/16"	5-19/32"
HEX	IN.	7/16"	9/16"	11/16"	7/8"	1-1/16"	1-5/16"	1-3/4"	2"	2-3/8"
MATERIAL	BODY	ZINC-PLATED STEEL (Zn-Fe)								
	ELEMENT	50 MESH STAINLESS STEEL SCREEN								
MAX OPERATING PRESSURE		300 PSI (21.1 kg/cm <sup>2</sup> )								
OPERATING TEMPERATURE		35°~160°F (1.6°~70°C)								
WEIGHT (APPROX.)	OZ.	0.38	0.69	1.22	2.14	3.67	6.61	11.71	14.84	23.48
UNIT PACK	EA.	10	10	5	5	1	1	1	1	1



### HOW TO ORDER

**FHFSM**      —     

**Female High Flow Steel Muffler**      Connection (NPTF)

18 = 1/8", 28 = 1/4"  
 38 = 3/8", 48 = 1/2"

### SPECIFICATIONS

ITEM	MODEL	FHFSM-18	FHFSM-28	FHFSM-38	FHFSM-48
CONNECTION	NPTF	1/8"-27	1/4"-18	3/8"-18	1/2"-14
OVERALL LENGTH	IN.	1-45/64"	2-13/64"	2-23/32"	3-7/32"
HEX	IN.	9/16"	11/16"	7/8"	1-1/16"
MATERIAL	BODY	ZINC-PLATED STEEL (Zn-Fe)			
	ELEMENT	50 MESH STAINLESS STEEL SCREEN			
MAX OPERATING PRESSURE		300 PSI (21.1 kg/cm <sup>2</sup> )			
OPERATING TEMPERATURE		35°~160°F (1.6°~70°C)			
WEIGHT (APPROX.)	OZ.	0.80	1.55	2.65	4.60
UNIT PACK	EA.	10	10	5	5



*All Stainless Steel*

### HOW TO ORDER

**HFSS**      —     

**High Flow Stainless Steel Muffler**      Connection (NPTM)

18 = 1/8", 28 = 1/4"  
 38 = 3/8", 48 = 1/2"  
 68 = 3/4", 88 = 1"

### SPECIFICATIONS

ITEM	MODEL	HFSS-18	HFSS-28	HFSS-38	HFSS-48	HFSS-68	HFSS-88
CONNECTION	NPTM	1/8"-17	1/4"-18	3/8"-18	1/2"-14	3/4"-14	1"-11.5
OVERALL LENGTH	IN.	1-3/8"	1-11/16"	2-7/64"	2-41/64"	3-15/64"	3-25/32"
HEX	IN.	7/16"	9/16"	3/4"	7/8"	1-1/16"	1-3/8"
MATERIAL	BODY	SUS304 STAINLESS STEEL					
	ELEMENT	50 MESH STAINLESS STEEL SCREEN					
MAX OPERATING PRESSURE		300 PSI (21.1 kg/cm <sup>2</sup> )					
OPERATING TEMPERATURE		35°~160°F (1.6°~70°C)					
WEIGHT (APPROX.)	OZ.	0.32	0.72	1.20	2.40	4.10	7.00
UNIT PACK	EA.	5	5	5	5	1	1