



Round Shaft Technology

Linear Bearings & Shafting



Configure Online at
pbclinear.com

1-800-962-8979

Product Selection Guide




Inch Series



ISO Metric Series



JIS Metric Series

Product Type	Description	Material	Open	Closed	Wide	Available In
	Plain Bearing Self lubricating bearing with patented compound of PTFE developed for improved performance over other bearings. Standard sizes in stock.	aluminum alloy, stainless steel	●	●		I M J
	EconoGlide Plain Bearings Replaces Oilite, bronze, and plastic bearings. Ideal for slow or moderate speeds for oscillating or rotary motion.	aluminum alloy housing	●	●		I M
	EconoGlide Flange Bearings Standard components include: mounting plate, pillow block assemblies, steel shafts, and support rails. Options include shaft materials, lead screws, ball screws, hand cranks, and motors.	alloy steel, 440 stainless steel, or chrome plated shafts, aluminum support rails, standard self-aligning pillow blocks		●		M
	Thin Wall Bearings Both plain and ball bearing versions of European metric sizes.	aluminum alloy housing anodized or steel with polymer retainer		●		M
	Open & Closed Pillow Blocks Available with either plain or ball bearings. Self aligning for ease of mounting. Standard sizes in stock.	aluminum alloy housing with clear anodized coating or stainless steel	●	●	●	I M
	Flange Mount Ease of mounting. Compact design.	aluminum alloy housing with clear anodized coating and inner plain bearing	●		●	I
	Flange Bearing Both plain and ball bearing available. Ease of mounting. Compact design.	aluminum alloy housing with clear anodized coating or steel with polymer retainer		●	●	M J
	Die Set Flange Bushings Mounting precision. Size interchangeable with industry standard die sets.	aluminum housing with black anodized coating and inner plain bearing		●	●	I M
	Sleeve & Sleeve with Flange Replaces Oilite, bronze, and plastic bearings. Ideal for slow or moderate speeds for oscillating or rotary motion.	aluminum alloy housing		●		I M
	Round Shafting Cut to length, random lengths, machined, pre-drilled, or tapped. Shaft assemblies and support rails also available.	ceramic coated aluminum, hardened steel, 440 stainless steel				I M
	Shafting Supports Shaft support rails, low profile shaft support rails, and end support blocks.	Aluminum or Steel				I M
	Square Bearings & Shafting Resists torque and eliminates extra costly components in parallel shafts.	aluminum alloy housing with red anodized coating and stainless steel square shafting		●		I

Product Selection Guide



Inch Series



ISO Metric Series



JIS Metric Series

Product Type	Description	Material	Open	Closed	Wide	Available In
	Ball Bearing Each ball bearing consists of an outer cylinder, ball retainer, balls, and double seals.	steel and polymer	●	●	●	I M
	Double Wide Extended length ball bearings consisting of steel outer cylinder, ball retainer, balls, and two double seals.	steel with polymer retainer		●	●	I M J
	Thin Wall Bearings Both plain and ball bearing versions of European metric sizes.	aluminum alloy housing anodized or steel with polymer retainer		●		M
	Pillow Blocks - Regular Size interchangeable, industry standard pillow block housing.	aluminum housing with clear anodized coating, inner steel, and polymer bearing	●	●	●	I M
	Pillow Blocks - Double Wide Extended length, size interchangeable, industry standard pillow block housing.	aluminum housing with clear anodized coating, inner steel, and polymer bearing				I
	Flange Mounts - Regular & Double Wide Standard ball bearing with either a square or round flange.	steel with polymer retainer		●	●	I M J
	Flange Mounts - Center Extended length standard ball bearing with a center located square or round flange.	aluminum alloy housing with clear anodized coating, inner bearing steel, and polymer retainer		●		I M J
	Roller Pillow Blocks Well suited for high loads and high speeds. Excels in contaminated environments and under high temperatures.	aluminum and coated steel rollers	●			I M
	Linear Slide Assemblies Standard components include: mounting plate, pillow block assemblies, steel shafts, and support rails. Options include shaft materials, lead screws, ball screws, hand cranks, and motors.	alloy steel, 440 stainless steel, or chrome plated shafts, aluminum support rails, standard self-aligning pillow blocks		—		I

Plain Bearing Table of Contents

EconoGlide™ Linear Plain Bearings



Simplicity® Linear Plain Bearings



Simplicity Pillow Blocks



Stainless Steel Pillow Blocks



Simplicity Twin Pillow Blocks




Simplicity Flange Mounts




EconoGlide Flange Single Plain Bearings




Simplicity Flange Single Plain Bearings

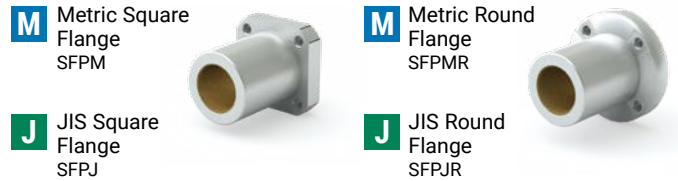

Simplicity Flange Double Plain Bearings

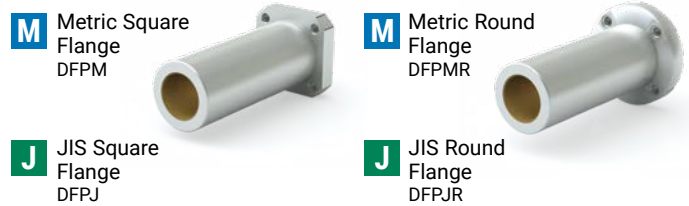

Simplicity Center Flange Plain Bearings

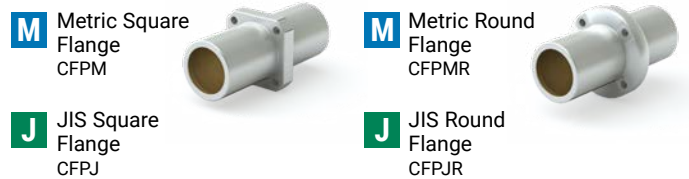


Die Set Flange Mounts



Die Set Bushings



Thin Wall Plain Bearings



Simplicity Sleeve Bearings



Square Shafting & Bearings



Ball & Roller Bearing Table of Contents

Linear Precision Plus Self-Aligning Ball Bearings

I Closed
IPS



I Open
IPSxx-OP



M Metric Closed
EPS

M Metric Open
EPSxx-OP

Linear Precision Ball Bearings

I Closed
IP



I Adjustable
IPxx-AJ



I Open
IPxx-OP



M Metric Closed
EP

M Metric Adjustable
EPxx-AJ

M Metric Open
EPxx-OP

J JIS Closed
JP

J JIS Adjustable
JPxx-AJ

J JIS Open
JPxx-OP

Double Wide Ball Bearings

I IP-W



M Metric
EP-W

J JIS
JP-W

Thin Wall Ball Bearings

M Metric
KHP



Linear Precision Plus Ball Bearing Pillow Blocks

I Closed
IPPS



I Open
IPPSN



with Lubrication
Port IPPS

Linear Precision Plus Twin Ball Bearing Pillow Blocks

I Closed
IPPSW



I Open
IPPSWN



with Lubrication
Port IPPS

Linear Ball Bearing Pillow Blocks

I Closed
IPP



I Open
IPPN



M Metric Closed
EPPM



M Metric Open
EPPMN



Linear Twin Ball Bearing Pillow Blocks

I Closed
IPPW



I Open
IPPWN



Flange Single Ball Bearings

I Square Flange
IPK



I Round Flange
IPF



M Metric Square
Flange
EPK

M Metric Round
Flange
EPF

J JIS Square Flange
JPK

J JIS Round Flange
JPF

Flange Double Ball Bearings

I Square Flange
Double
IPK-W



I Round Flange
Double
IPF-W



M Metric Square
Flange Double
EPK-W

M Metric Round
Flange Double
EPF-W

J JIS Square
Flange Double
JPK-W

J JIS Round
Flange Double
JPF-W

Center Flange Ball Bearings

M Metric Square
Center Flange
EPKC



I Round Center
Flange
IPFC



J JIS Square
Center Flange
JPKC

M Metric Round
Center Flange
EPFC

J JIS Round
Center Flange
JPFC

Roller Pillow Block Bearings

I Single
SPB-OPN



I Double
DPB-OPN



M Metric Single
MSPB-OPN

M Metric Single
MDPB-OPN

I Twin
TPB-OPN



M Metric Twin
MTPB-OPN

Roller Pillow Block - Shaft & Rail Systems

I End Block
System
S1_





I Support Rail
System
S2_






Shafting & Linear Guides Table of Contents








Simplicity 60 Plus Shafting



Shafting Support End Blocks



Support Rails and Assemblies



Simplicity Linear Slides




Table of Contents

Product Information

Applications

Plain Bearings	17
Roller Pillow Blocks	50

Overviews

Linear Bearing Selection	6–7
Simplicity Plain Bearings.....	8–11 & 14–16
EconoGlide Plain Bearings	12–16
Ball Bearings	33–34
Roller Pillow Blocks	47–49

Ordering

EconoGlide	18
Simplicity Bearings	20
Simplicity Bearings with Housings	21
Ball Bearings	35

Accessories

Simplicity	32
Roller Pillow Blocks	54–55

Technical Information

Linear Slides

Selecting and Mounting Slides	146
Slides Load Capacities	147–148
Slides Column Load Chart	149
Slides Critical Speed Chart.....	150

Simplicity Linear Plain Bearings

Ratings for Plain Bearings.....	152
Types & Effects of Lubrication.....	153
Load Capacity	154
Wear Rate	155
Coefficient of Friction.....	156
Cantilevered Loads	157–158
Shaft Deflection	159–160
Installation.....	161–164
Simplicity Chemical Reaction Chart	165
EconoGlide Chemical Reaction Chart	166

Linear Ball Bearings

Load Ratings	167–168
Rating Life	168–169
Clearance & Mounting	170–171

Roller Pillow Block Bearings


Load & Sizing	172
Adjustments & Curves.....	173
Cross Reference Guide.....	174



Email an Application Engineer

Linear Shafting

Engineered for Maximum Linear Bearing Performance

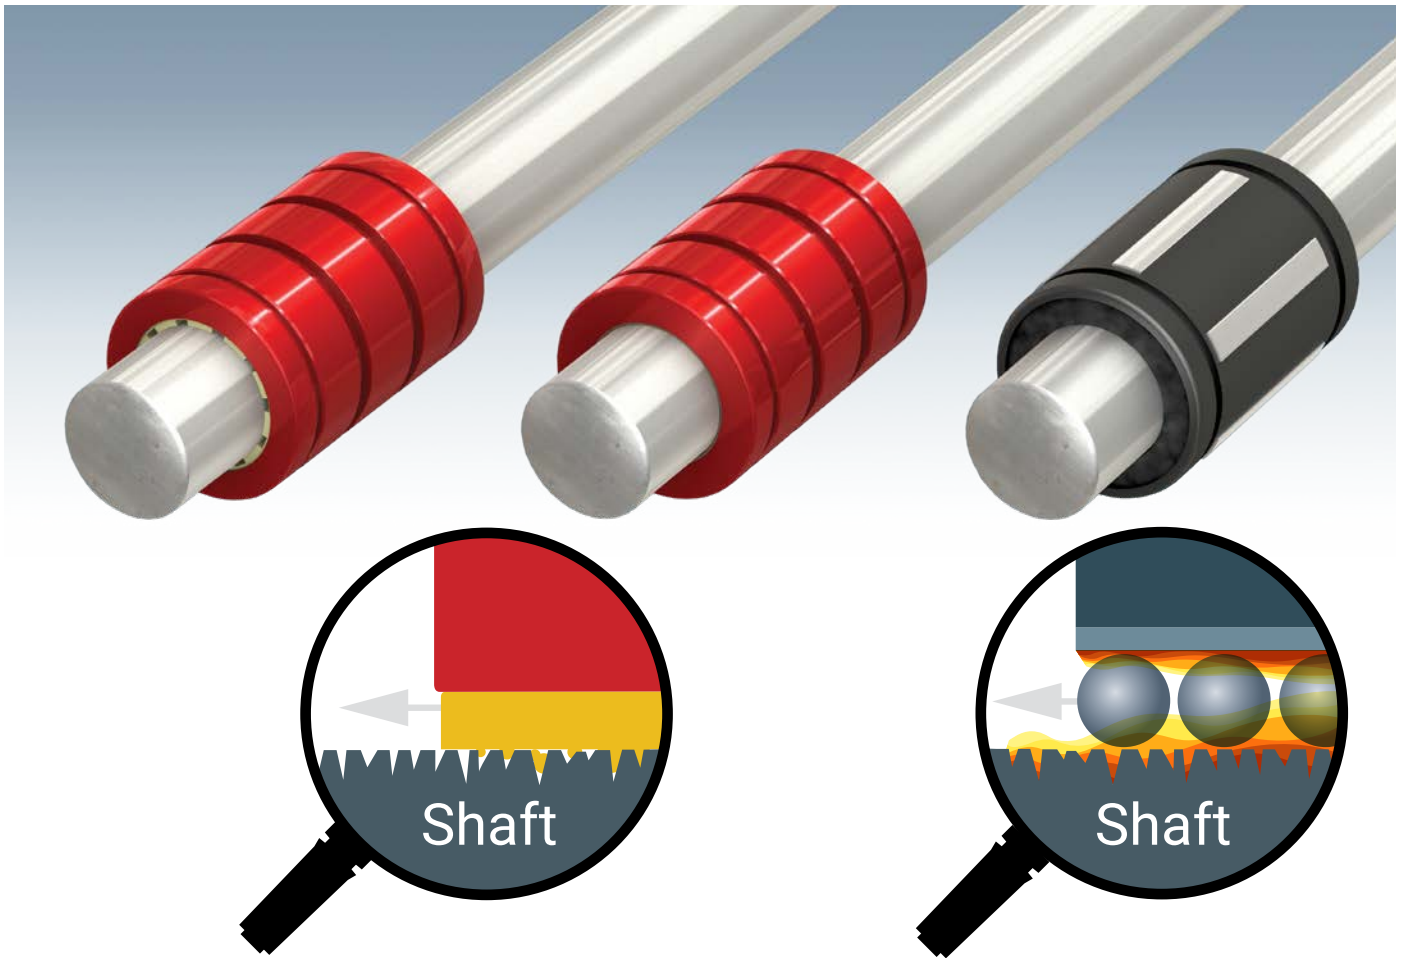

EconoGlide Bearings & Simplicity Plain Bearings

The Frelon® IM and Frelon break-in and transfer process operates at maximum efficiency with Simplicity 60 Plus Shafting resulting in true self-lubrication and the longest life possible.

- **Self-Lubricating:** maintenance-free, additional lubrication optional
- **Cleans Shafting:** EconoGlide bearings use their channels to keep dust and debris off the shaft while Simplicity bearings act as a wiper, clearing contaminants.
- **Vibration Damping:** eliminates fretting corrosion
- **Simplicity Wide Temperature Ranges:** (-400°F/+400°F), (-240°C/+204°C)

Linear Ball Bearings

The right amount of microscopic surface texture holds lubrication for consistent smooth ball rotation minimizing the effects of metal-to-metal contact.

- **Excellent Rigidity:** providing smooth, quiet operation
- **Extremely Low Friction:** rolling elements provide consistent anti-friction movement
- **Outer Shell:** Available with steel jacket or self-aligning super bearing shell

Linear Bearing Selection - Application Dependent

Linear Plain and Ball Bearings

Good engineering principles dictate that the best bearing design be utilized for any given bearing application. Each type of bearing has advantages and disadvantages. Strengths or limitations can make it a clear choice depending on the


application environment, load and speed, and maintenance requirements. At other times, more than one bearing type may meet the basic performance criteria and an engineer will need to make a choice on which bearing type to use.

PBC Linear Offers 3 Core Bearing Solutions to Meet Varied Application Demands.

EconoGlide™ Plain Bearing

Grooves channel dust and debris away from the bearing surface

Contact surface allows for high load capacity

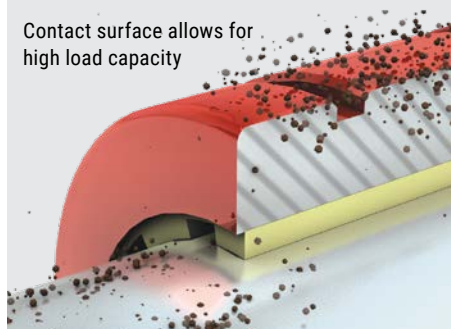

EconoGlide bearings provide a lightweight, maintenance-free plain bearing option designed for cost-sensitive applications requiring quiet operation, corrosion resistance, and dependable performance in dusty or lightly contaminated environments.

Simplicity® Plain Bearing

Fines embed in Frelon® liner eliminating shaft damage

Wiping action cleans shaft




Simplicity linear bearings, introduced in 1983, are self-lubricating plain bearings engineered to perform reliably in challenging environments including dirt, vibration, shock loading, cleanrooms, welding, foundry, and washdown applications where traditional ball bearings often fail.


Ball Bearing

Better performance for moment loading
Balls provide precise, low-friction performance

Susceptible to contamination

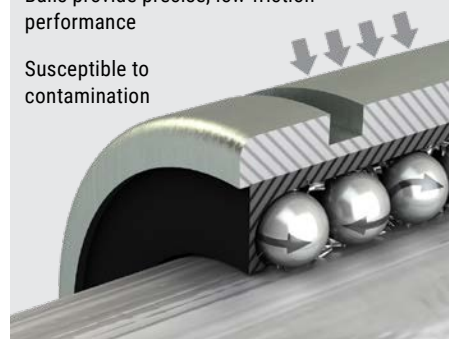


Linear ball bearings deliver high precision, low friction, and smooth motion, making them well-suited for clean, controlled environments where accuracy and speed are critical.

Bearing Type	Load	Moment Loads	Linear Speed	Coefficient Of Friction	Precision	Environment
EconoGlide Bearings 	Up to 13x ball bearings	Limited due to 2:1 ratio  Link to 2:1 Ratio	Up to 295 sfm (1.5 m/sec) dry running	Frelon IM = 0.05–0.15 Consistent over life		Well suited for both clean and dusty applications
Simplicity Bearings 	Up to 20x ball bearings	Limited due to 2:1 ratio  Link to 2:1 Ratio	Up to 300 sfm (1.524 m/sec) dry running Up to 825 sfm (4.19 m/sec) with lubrication	FrelonGOLD® = 0.125 Consistent over life and in a variety of environments	Precision running clearance = 0.0005" (0.0127 mm) per side	Excels in contaminated, wet, dry, and clean room applications
Ball Bearings 	Limited due to point-to-point contact of balls to shaft	Moderate to good High moment loads can cause increased wear and shorten bearing life	Up to 3 m/sec (590 sfm) Always requires lubrication	Average = 0.002 Can change dramatically dependent on environmental conditions	Can be preloaded, virtually eliminating play This can shorten life	Will corrode and fail in contamination


Performance - Simplicity® Plain Bearings

Frelon® + Precision Bearing Technology


- The Frelon liner is bonded to the bearing shell at the molecular level, which transfers the load and dissipates heat buildup throughout the bearing
- Will not rust or corrode due to anodized aluminum or 316 stainless steel shell
- Patented self-aligning capabilities are standard
- Provides both linear, oscillating, rotary, or any combination of motions
- Maintenance free operation
- Smooth and quiet operation plus long life
- Highly accurate
All critical surfaces are ground on precision bearing grinders
- Will not catastrophically fail or damage shaft



FrelonGOLD®



Frelon J



Frelon W



- FrelonGOLD – dark gold high performance material compatible with RC60 hardened steel shafting, RC70 ceramic coated, & 400 series stainless steel shafting.
- Frelon J – yellow material formulated to provide the optimum performance with 300 series stainless steel and softer shafting such as bare aluminum.
- Frelon W – white color, food-grade liner, FDA compliant, compatible with stainless steel and softer metal shafting.
- The PBC Linear unique bonding process facilitates the ability to provide solutions for applications with a range of additional bearing liner materials.

Contact PBC Linear to discuss your specific application.



Email an Application Engineer



Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 90

Frelon Bearing Liner Materials


The Frelon liners are compounds of PTFE and fillers developed for improved performance over other bearings. They provide low wear, low friction, self-lubrication, and high strength.

PTFE Features:

- Self-lubricating (runs without added lubricant)
- Embeddability of hard particulate
- Wide temperature range -400°F to +400°F (-240°C to +204°C)
- Chemically inert
- Vibration damping (no metal-on-metal)

Filler Benefits:

- High load capacity
- High strength
- Low wear rate compared to other materials

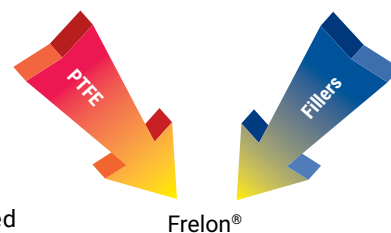


Running Clearance

Simplicity available in 2 classes of running clearance:

1. Precision—"FL":

- Performs like a preloaded ball bearing
- Tightest running clearance approximately 0.001" (0.025 mm)
- Used in applications that require high precision



Standard "FL"

Performs like a preloaded linear ball bearing


0.0005" per side clearance average (0.0127 mm)



Not recommended for all parallel shaft applications. Any misalignment can cause binding on the shaft. Recommend: Compensated—"FLC" (see below).

2. Compensated—"FLC":

- Performs like a standard ball bearing
- Additional clearance built into the I.D.—all other dimensions are the same as the precision bearings
- Ideally suited for parallel shaft applications



Compensated "FLC"

Performs like a standard linear ball bearing

0.0015" + per side clearance average (0.0381 mm)

Note: Many parallel shaft applications will run "FL" precision on one rail and "FLC" compensation on the opposite rail to accommodate slight misalignments.

Performance - Simplicity® Plain Bearings


Speed Characteristics

Exceeding these speeds causes frictional heat and accelerates liner wear.


Bearing Material	No Lube Continuous Motion	No Lube Intermittent Motion	With Lubrication*
FrelonGOLD®	300 sfm	825 sfm	825 sfm
	60 in./sec.	165 in./sec.	165 in./sec.
	1.524 m/sec.	4.19 m/sec.	4.19 m/sec.
Frelon® J & W	140 sfm	400 sfm	400 sfm
	28 in./sec.	80 in./sec.	80 in./sec.
	0.711 m/sec.	2.03 m/sec.	2.03 m/sec.

* Depending on the lubrication used, loads, and frequency of continuous or intermittent motion, speeds can be in excess of the numbers shown.


Continuous Motion MAX: Frelon J & W = 140 sfm
FrelonGold = 300 sfm

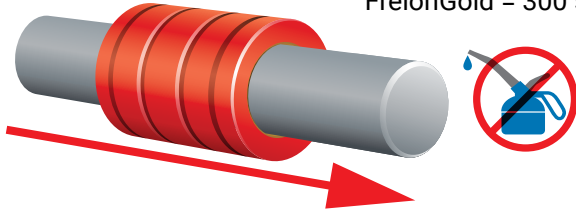

Intermittent Motion MAX: Frelon J & W = 400 sfm
FrelonGold = 825 sfm

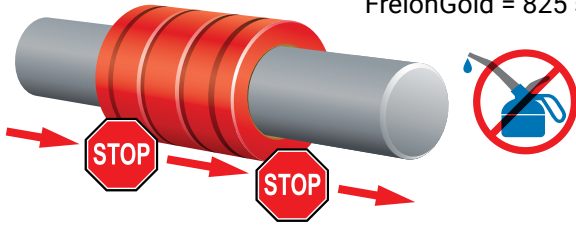

with Lubrication in Excess of: Frelon J & W = 400 sfm
FrelonGold = 825 sfm

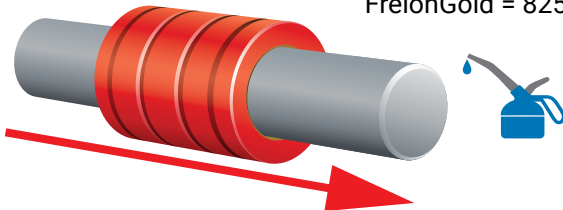

Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 90

Load Capacity of Frelon Liner


Simplicity bearings can carry from 4 to 20 times the load of a linear ball bearing.

Bearing Material	Static Load Capacity
FrelonGOLD	3,000 psi or 210.9 kgf/cm ²
Frelon J & W	1,500 psi or 105.45 kgf/cm ²

• Allows the engineer to maintain performance in a smaller designed package
Example: Simplicity 1/2" I.D. = 1" I.D. linear ball bearing

• Shock loads and vibration are absorbed

• Metal-to-metal contact is eliminated providing a smoother, quieter running assembly

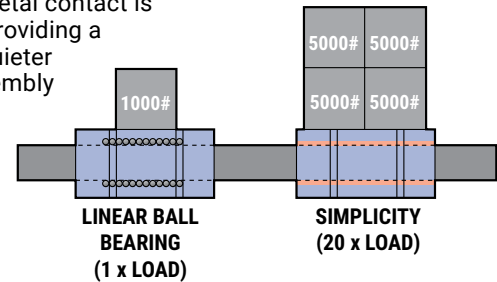

Performance Ratings (for Linear Motion)

Plain bearings are rated by their limiting PV, which is a combination of load over a given surface area and the velocity.


Bearing Material	MAX. "PV"	MAX. "P"	MAX. "V" (No Lubrication)
FrelonGOLD	20,000 (psi x ft./min.) or 430 (kgf/cm ² x m/min.)	3,000 psi or 210.9 kgf/cm ²	300 sfm or 91.44 m/min.
Frelon J Frelon W	10,000 (psi x ft./min.) or 215 (kgf/cm ² x m/min.)	1,500 psi or 105.45 kgf/cm ²	140 sfm or 42.66 m/min.

PV = The performance measurement of plain bearings

PV = P x V where P = pressure (load) in psi (kgf/cm²)

V = velocity (speed) in sfm (m/min.)

Note: All three parameters must be met by an application for the bearing to perform properly.

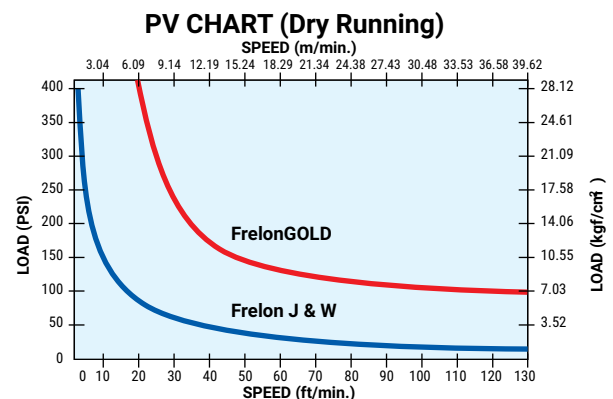


Performance - Simplicity® Bearings

Transfer Process of Liner to Shaft

The interaction of the Frelon® material and the shafting creates a natural, microscopic transfer of the Frelon to the running surface.

A thin film is deposited on the shaft, and the valleys in the surface finish are filled in with Frelon material during the initial break-in period. This transfer creates the self-lubricating condition of Frelon riding on Frelon.

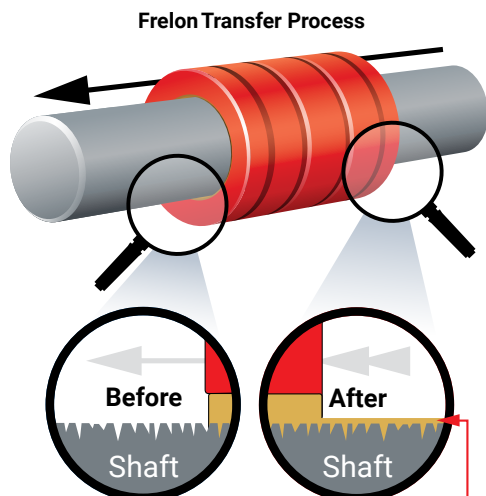

This break-in period varies depending on several criteria:

- 1. Preparation of the shafting prior to installation.** It is best to clean the shafting with a 3-in-1 type oil before installing the bearings. This ensures that the surface will receive a full transfer of material.
- 2. Speed, load, and length of stroke specific to the application.** Typically the initial transfer process will take approximately 50-100 strokes of continuous operation. The running clearance on the bearing will increase an average of 0.0002" to 0.0005", depending on the length of the stroke and surface requiring the transfer.
- 3. How often the shafting is cleaned.** If the shafting is cleaned regularly, increased wear will be seen in the bearings. This is due to the transfer process being performed over and over again.



CAUTION Do not repeatedly clean the shafting with alcohol. This will remove the previously transferred material entirely and increase the wear to the bearing liner.




CAUTION Do not use smooth chrome shafting with Frelon bearings. The surface finish is less than 8 Ra and does not maintain proper transfer of Frelon material. This will result in accelerated wear.

Factors Affecting Wear Rate/Life

Shafting requirements for Frelon bearing materials include:

Best Performance:

- Finish of 8–12 Ra
- Hardness of RC 60

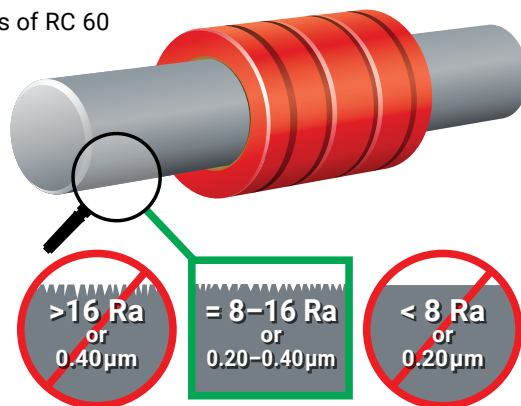

Acceptable Performance:

- Finish of 8–16 Ra
- Hardness of RC 35
- Surface finish requirements apply to all Frelon bearing materials
- Rougher shafting can be used, but both bearing and shafting will wear at accelerated rates and binding may occur

Note: Consult factory if using chrome plated shafting that is polished to < 8 Ra.

Chemical Resistance

Simplicity bearings stand up to harsh environments and provide excellent performance in a submerged condition.

FrelonGOLD®: The fillers in the material can be attacked by deionized water and other harsh chemicals

Frelon J: Almost universal chemical inertness, only molten sodium and fluorine at elevated temperatures and pressures show any signs of attack

Frelon W: A white colored food-grade liner that is FDA compliant

Anodized Aluminum Shell (Standard):
Good chemical resistance in most industrial applications

316 Stainless Steel Shell (Optional):
Excellent chemical and corrosion resistance in harsh environments



More Information about Simplicity's Chemical Resistance




Performance - Simplicity® Plain Bearings

Wear Rate/Life Expectancy

The life expectancy of a Simplicity bearing is dependent on application parameters such as:

- Shaft Hardness
- Surface Finish
- Length of Travel
- Temperature
- Contamination
- Running Clearance
- Lubrication
- Speed
- Preparation

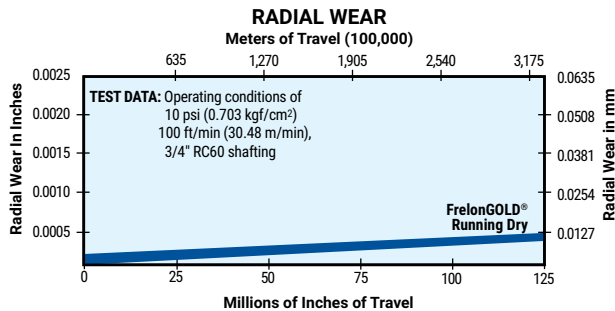

The Radial Wear chart gives a guideline for a typical application at 10 psi (0.703 kgf/cm²) traveling at 100 ft./min. (30.48 m/min.).


Lubrication

Benefits of using a recommended lubrication

- Reduce friction up to 50%
- Minimize wear of liner
- Reduce heat buildup allowing greater speeds. Actual speeds achieved are dependent on type of lubricant and frequency of application
- Aid in cleaning the shaft for a proper transfer process, a minimum of initial lubrication of Simplicity bearings is strongly recommended


Recommended Lubrication

- Waylube Oil
- Light Weight Oils
- 3-in-1 oils
- Petroleum Based Grease



NOT Recommended

- WD-40*
- PTFE Sprays
- Fluorocarbons
- Silicone Oils, Grease or Spray




*WD40® is a registered trademark of the WD40 company

Temperature

Simplicity bearings can operate in a wide range of temperatures (-400°F to +400°F) (-240°C to +204°C). Depending on the materials housed in the pillow block and the size of bearing

- Maintains the same performance characteristics
- The thin liner allows heat to dissipate through the bearing shell

Temperature Extremes

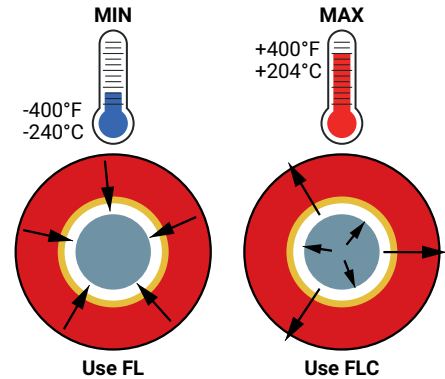

Thermal Expansion

The standard bearing I.D. options are designed for use in most industrial applications.

For temperatures below 0°F, the standard I.D. is recommended (FL series).

For extreme high temperatures, the Compensated I.D. bearing is recommended (FLC) for the increased running clearance.




It is always best to inspect actual size at extreme temperatures to ensure proper running clearance.

Rotary Applications

Simplicity bearings will operate very well in rotary applications if applied properly.

Stationary rotary applications do not allow the heat to be spread over an extended area. It is retained in the I.D. of the bearing limiting speed & load.

- MAX rotary speed (No lube/continuous motion)
- 40 sfm (12.2 m/min.) for standard precision I.D. clearances
- 140 sfm (42.6 m/min.) for compensated I.D. clearances
- $V(\text{sfm}) = 0.262 \times d \times \text{RPM}$
d = shaft diameter (inches)
RPM = revolutions per minute
- Properly maintained lubrication can increase these speeds dramatically

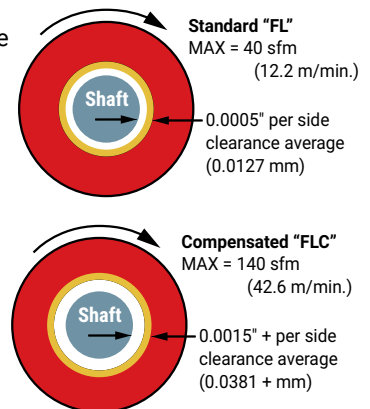

It is always best to perform specific testing for rotary applications above these limits where lubrication is to be used.

Performance - Simplicity® Plain Bearings

Vacuums/Outgassing/Cleanrooms

Due to self-lubrication, low outgassing, and a minimum of particulate (buildup), Simplicity bearings are excellent in clean rooms and vacuums.

Testing has been done on the Frelon® materials in accordance with ASTM E-595-90 with acceptable maximums of 1.00% TML and 0.10% CVCM.

MATERIAL	%TML	%CVCM
----------	------	-------

FrelonGOLD®	0.00	0.00
Frelon J	0.18	0.01

TML = Total Mass Loss

CVCM = Collected Volatile Condensable Materials

Submerged or High Humidity Conditions

Simplicity bearings provide excellent performance in submerged or high humidity conditions. A stainless steel bearing (housing) and shaft is recommended for these conditions as well as choosing either the Frelon J or Frelon W liner material for that bearing.

The bearings will employ the fluid as a lubricant showing increased velocities and wear life. Oils and non-salt water are especially effective.

Note: Please contact factory before specifying FrelonGOLD for submerged applications.


Lubrication System

Order with "JKM" modifier


Lubrication system includes:

Felt wick: Retains oil lubricants (remove when using grease lubrication). Wicks are glued in place on open bearings while they just sit in place on closed bearings.

Zerk fitting: Installed into pillow block, other housing, or directly into die sets PAC, PACM. (Standard lube fitting with ¼-28 thread)



Zerk Fitting In Housing

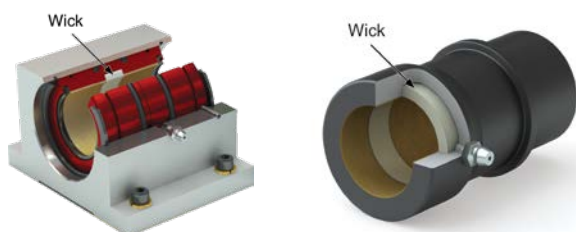

O-Rings

Used in standard pillow blocks and with self-aligning bearings.

Nitrile Buna 70 (standard)

A good general purpose rubber that is used in 98% of applications -65°F to 275°F (-54°C to 135°C).

Viton (special - designate with "V")

Used only in high temperature applications up to 400°F (204°C).



Seals

Use only in the most contaminated environments.

Polymod® (standard): A high performance polymer modified material that reduces friction of a standard buna material by 50% and increases wear life. **Temperature:** -20°F to +212°F

Polymod is a registered trademark of Polymod Technologies, Inc.

Urethane (special - designate with "U"): A moly-impregnated urethane scraper that is only for the severest applications. Friction is greatly increased! **Temperature:** -40 to +200°F

Viton™ (special - designate with "V"): A brand of synthetic rubber and fluoropolymer elastomer used only in high temperature applications. **Temperature:** Up to +400°F

Attention: 90% of applications do not require seals when using Simplicity bearings. The liner has a natural ability to wipe particles from the shafting. Any particulate (metal, sand, etc.) that does enter the bearing will embed itself into the soft liner not scoring the shafting or locking mechanical parts.

When ordering a bearing with any internal features (seals or internal lubrication), the bearing may or may not be shipped with extra internal grooves in addition to those needed for the ordered option. Low volume orders are more likely to have additional grooves. The extra grooves will not negatively impact the performance of the bearing.

Also, internal grooves are typically an anodized surface; however, in the interest of the quickest possible delivery, the internal grooves may not be anodized.

Bearing Alignment

Linear ball bearings will continue to operate in a misaligned condition, but can cause damage to the shafting and catastrophically fail.

Simplicity bearings DO NOT tolerate misalignment. They simply stop moving without any damage to the shafting. Self-aligning housings aid in misalignment up to 1/2° from centerline.

Note: Please refer to the tables in the installation section for possible solutions to misalignment.

Performance - EconoGlide Plain Bearings



Frelon IM + Precision Bearing = EconoGlide


Combining a new, self-lubricating Frelon® IM liner to our precision bearing expertise yields our EconoGlide bearing, a cost effective and oil-free linear solution.

- No critical requirement for shaft hardness or housing mounting holes simplifies system design and integration
- Self-lubricating design delivers maintenance-free and oil-free operation
- Resistant to corrosion and Alkaline cleaning solutions
- Straight grooves design channels dust away from the bearing surface to maintain smooth motion in dusty environments
- Easy installation and replacement reduces downtime
- Lightweight design assists in energy efficient systems

Frelon IM Bearing Liner Material

The grease impregnated in the pores of the solid plastic material allows the bearing to be lubricated for the life of the bearing.

- Engineered plastic body creates a wear-resistant surface
- High strength fibers improve the material load
- Infused lubrication decreases the coefficient of friction and prolongs bearing life

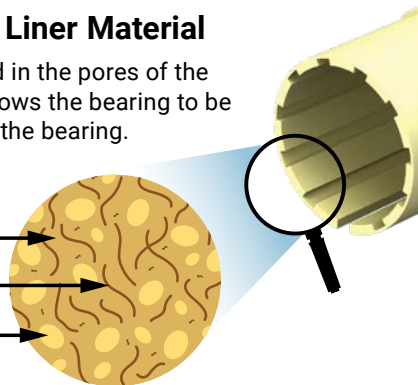

Note: Contact a PBC Linear Application Engineer about seals and/or lubricator options for EconoGlide bearings.




Email an Application Engineer

Wear Process/Rate


Once the bearing begins operating, a transfer process occurs in which the impregnated lubricant is gradually released, forming a thin, consistent lubricating film on the shaft.

This film reduces both friction and wear. As this film becomes established, the wear rate stabilizes over time.

Frelon IM liners perform best with hardened chrome shafting, but all shafting types are suitable.

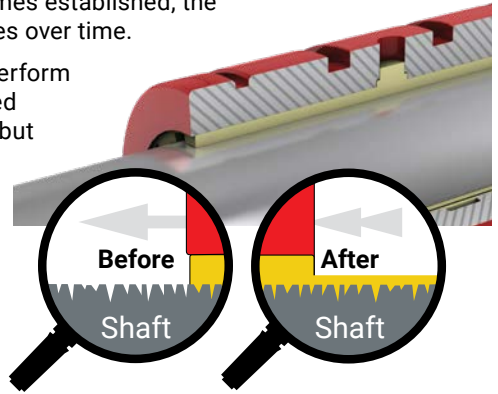

Wear Against Operation Time

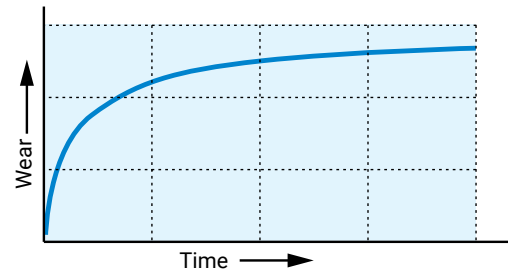

Coefficient of Friction/Lubrication

With sufficient lubrication, the coefficient of friction can be decreased. It is recommended to use silicon-based oil or grease. Do NOT use 3-in-1 type oils.

The coefficient of friction decreases as load increases and increases as speed also increases.

Lubrication	Coefficient of Friction
None	0.15
Grease	0.09
Oil	0.04
Water	0.04

Temperature

Bearing Material	MIN Temp	MAX Long-Term Temp	MAX Short-Term Temp
Frelon IM	-50°C (-58°F)	90°C (194°F)	120°C (248°F)

Performance - EconoGlide Plain Bearings

Performance Ratings (for Linear Motion)

Plain bearings are rated by their limiting PV, which is a combination of load over a given surface area and the velocity.

Bearing Material	MAX. "PV"	MAX. "P"	MAX. "V" (No Lubrication)
Frelon IM	11,420 (psi) x ft./min. or 245 (kgf/cm ² x m/min.)	2,030 psi or 142.76 kgf/cm ²	98 sfm or 30 m/min. (Sustained)

PV = The performance measurement of plain bearings


PV = P x V where P = pressure (load) in psi (kgf/cm²)

V = velocity (speed) in sfm (m/min.)

Note: All three parameters must be met by an application for the bearing to perform properly.

Load Capacity


The Frelon IM liner creates a contact surface with the shaft as opposed to the contact points of a ball bearing. This allows the EconoGlide bearing to have a higher load capacity than traditional linear ball bearings.



Bearing Material	Static Load Capacity	Dynamic Load Capacity
Frelon IM	5,076 psi or 357 kgf/cm ²	2,175 psi or 153 kgf/cm ²

*The maximum dynamic load capacity is achieved at low speeds. Higher dynamic loads can be reached for intervals of less than 3 min.

Increased speeds cause a temperature increase which will result in a decreased load capacity. Load capacity will sharply decrease when the operating temperature is higher than the recommended maximum temperature.

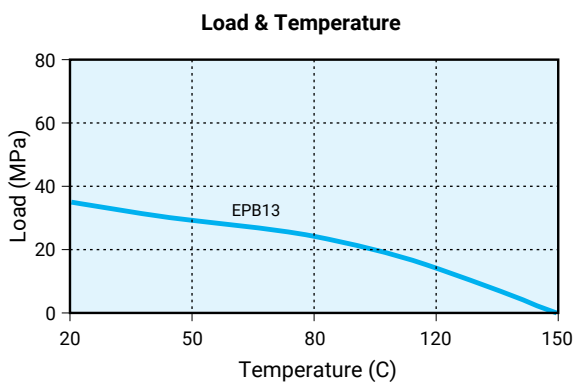

Speed Characteristics

Bearing Material	MAX Rotating Speed	MAX Oscillating Speed	MAX Linear Speed
Frelon IM	295 sfm 59.06 in/sec. 1.5 m/sec.	217 sfm 43.3 in/sec. 1.1 m/sec.	1,575 sfm 314.9 in/sec. 8.0 m/sec.

*Speeds were calculated under very low loads. Higher loads will result in lower maximum speeds.

Performance Ratings


Like Simplicity bearings, EconoGlide bearings are plain bearings that are rated by their limiting PV, which is a combination of load over a given surface area and the velocity.

PV = The performance measurement of plain bearings

PV = P x V where P = pressure (load) in psi (kgf/cm²)

V = velocity (speed) in sfm (m/min.)

Bearing Material	MAX "PV"
Frelon IM	11,420 psi x ft/min 245 kgf/cm ² x m/min

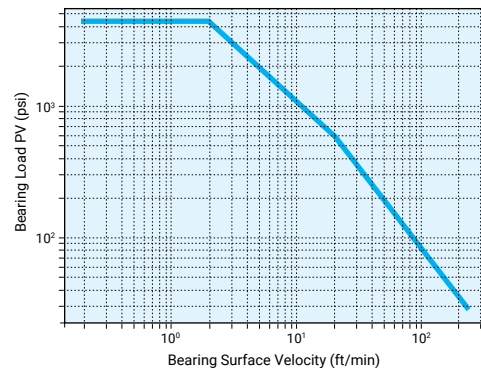

Chemical Resistance

Frelon IM offers chemical resistance against mild base, weak acidic chemicals and various lubricants. See the Chemical Resistance Chart in the Technical section.


The moisture absorption of Frelon IM is 0.3% in standard atmosphere. The maximum water absorption is 1.3% in water. These values are so low that design changes due to absorption are only necessary in extreme applications.

Performance - Simplicity® & EconoGlide Bearings

Bearing Shell

Simplicity bearings are available in a variety of configurations to help meet specific application needs:


- Standard is aluminum alloy with anodized finish

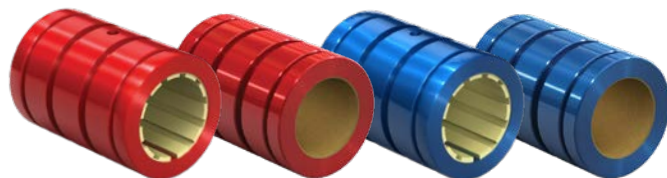

Inch Series

ISO Metric Series

- 316 stainless steel (no plating)

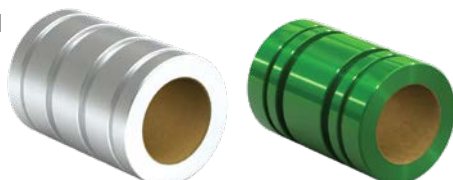

316 Stainless Steel

JIS Metric Series


Materials

Aluminum Alloy: Is a heat treated and artificially aged aluminum with good strength and corrosion resistance.

316 Stainless Steel: Has an excellent corrosion resistance and is widely used by the paper, food, and other industries.

Finishes


Standard Anodized: A sulfuric bath anodizing with a nickel acetate seal that will stand up to 14 days exposure in a 5% salt spray solution at 96°F. Applied at a 0.0002" thickness.

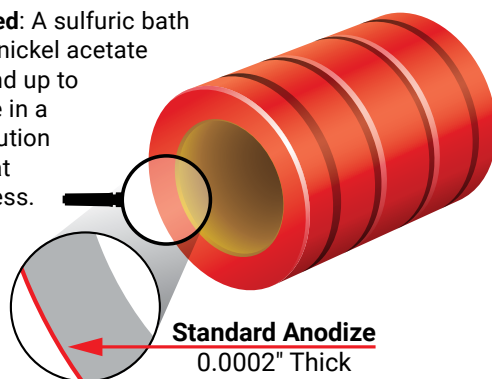

Self-Alignment Feature

Simplicity bearings are available with a standard straight O.D. or a crowned self-aligning O.D.


FL – (Standard)

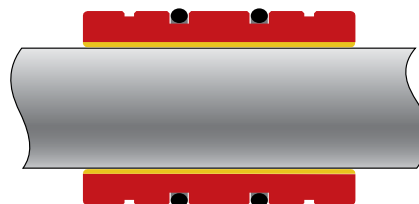

Note: Standard pillow blocks use FL bearings with self-alignment built into the I.D. of the block.

- Straight O.D.
- Standard pillow blocks have the self-aligning capability designed into the block using standard "FL" bearings for the final assembly

FLA – (Self-aligning O.D.)

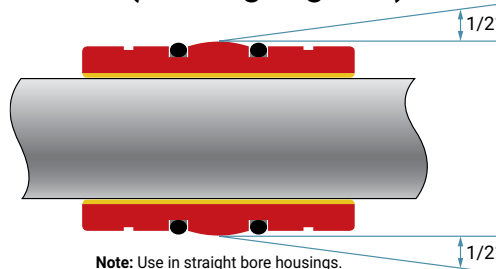


Note: Use in straight bore housings.

- Has a crown on the O.D. allowing the bearing to re-align itself in binding situations
- Specifically designed to easily retrofit straight bore housings
- The bearing will allow 1/2° of misalignment capability from centerline (1° overall)
- O-rings can be used on either side of the crown to cushion and eliminate clatter in operation (sold separately)


Performance - Simplicity® & EconoGlide Bearings

Pillow Blocks

- Made of aluminum alloy or stainless steel
- Pillow blocks are interchangeable with industry standard ball bearing pillow blocks
- Critical centerline dimensions hold accuracy within $\pm 0.001"$ on inch sizes and ± 0.015 mm on metric sizes

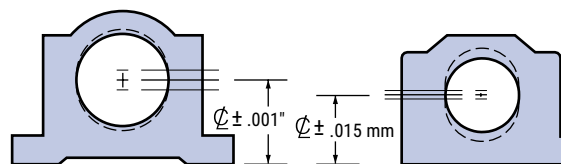

SIMPLICITY = TIGHTER TOLERANCES



INDUSTRY STANDARD

Finishes

- Clear anodized finish (Standard)

Standard pillow blocks have built-in self-alignment in all directions:

- Standard pillow blocks have $1/2^\circ$ misalignment from centerline
- This feature is built into the housing with a spherical radius at the midpoint of the block
- This self-aligning capability will allow for some shaft deflection and misalignment


Rigid or straight bore housings are available:

- This does not allow for any self-alignment and provides a very rigid assembly
- They are typically used in single shaft applications

Open Bearings Orientation

Simplicity bearings can operate in any orientation.

Load capacities will vary on open bearings depending on the orientation in which they are being used.

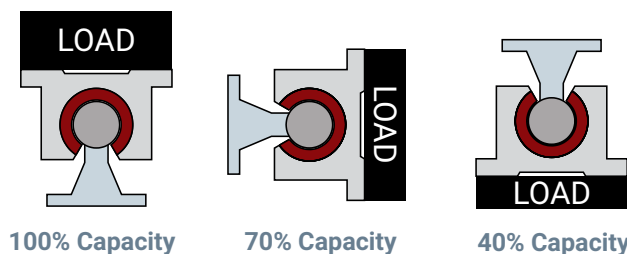

100% Capacity


70% Capacity

40% Capacity

Cantilevered Loads

- Maximum 2:1 ratio
- 1x = bearing separation on same shaft
- 2x = distance from shaft to load or force

Example: If 2x equals 10" then 1x must be at least 5"

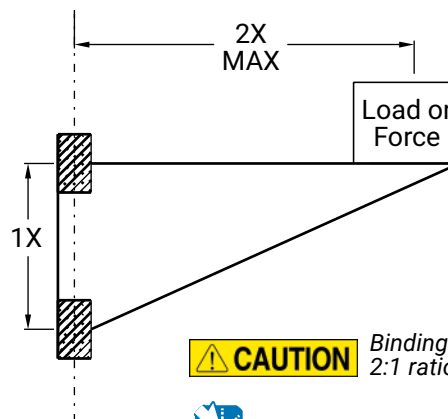

CAUTION Binding will occur if the 2:1 ratio is exceeded.



Simplicity 60 Plus® Shafting

The PBC Linear development team, working in close conjunction with engineers from LEE Linear®, have together formulated a linear shaft designed specifically for optimal bearing performance.

Advanced process capabilities maintain the ideal surface finish resulting in the longest life and highest performing shaft-to-bearing combination.

Don't be misled, all shafting is not alike! Don't settle for below average performance. The smoothest shafting is NOT always the best for all situations.


In most applications, smoother does not equal better; in fact, it means decreased performance and shortened life.

A shaft surface finish of 8-12 Ra is the optimal smoothness for linear plain and ball bearings.

Simplicity 60 Plus Shafting provides maximum linear bearing performance and the following features:



- Optimized shaft surface finish for plain bearings
- Customizable length and machined features via the configurator with no minimum quantities
- Made in the USA

Plain Bearing Applications

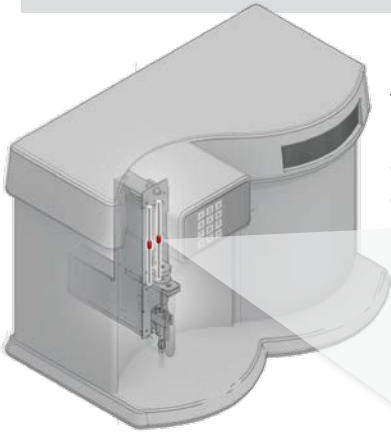

Lab Equipment:

This blood analyzer utilizes Simplicity® plain bearings because they are self-lubricating and do not require additional grease, which can cause contamination.

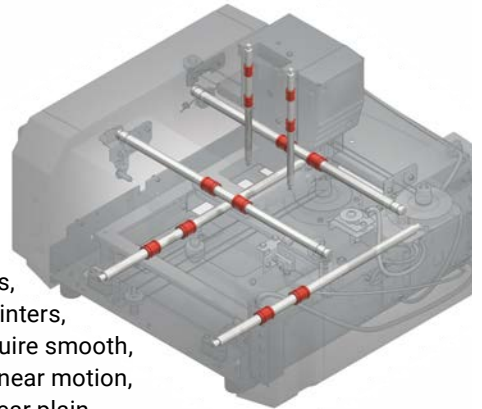


Printing:

Commercial printers, 3D printers, laser printers, and deskjets all require smooth, precise, and quiet linear motion, which Simplicity linear plain bearings provide.



Thermoforming:

Simplicity linear plain bearings operate in a wide range of temperatures, which is required when molding heated plastic sheeting in thermoforming machines.

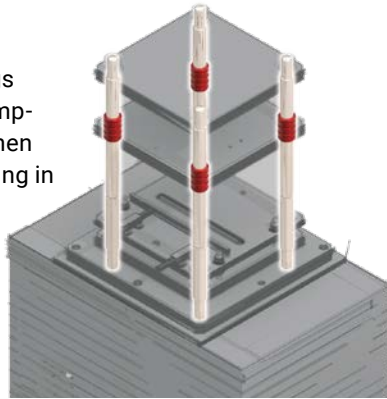

Additive Manufacturing:

3D printers require smooth, repeatable linear motion, which is achieved with Frelon® lined linear plain bearings.

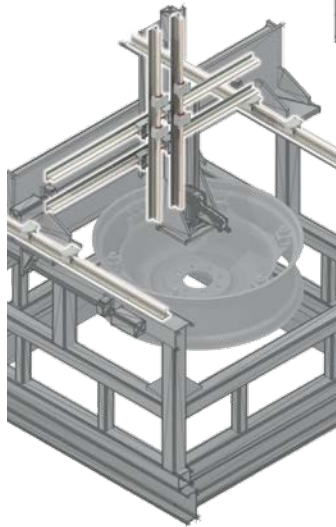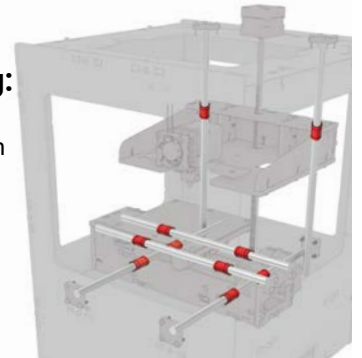

Assembly and Inspection Stations:

Round Shaft Technology utilizes precision round shafting as a guideway and combines linear plain bearings for movement, providing a low maintenance solution in assembly stations.




Seat Adjustment & Shock Absorption:

Not all applications are easily accessible for maintenance or repair, including tough military vehicle seating. This is one reason Simplicity plain bearings, with Frelon self-lubricating liner, is the best choice. Simplicity provides long-lasting linear motion that will not catastrophically fail.


Stone Saws and Heavy Duty Cutters:

Simplicity linear plain bearings are self-lubricating and excel in dirty or contaminated environments such as saws and cutters.

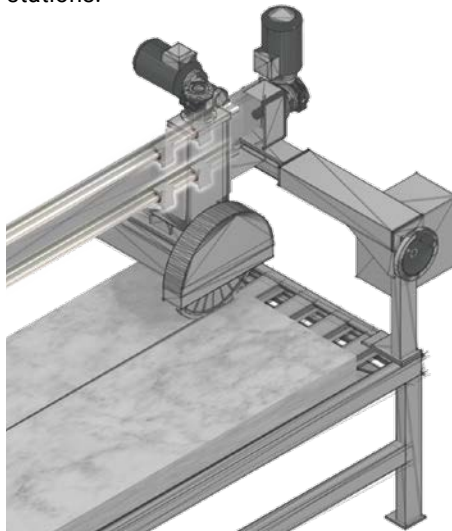

Welding Machines:

Simplicity linear bearings handle loads over 700 kN (157,000 lb.) and have a high temperature range (up to 204°C). As required in welding applications, they require low maintenance in contaminated environments.

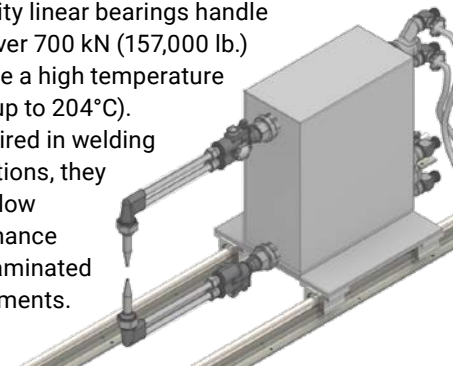





Configure
Online

Ordering Information

EconoGlide Linear Plain Bearings

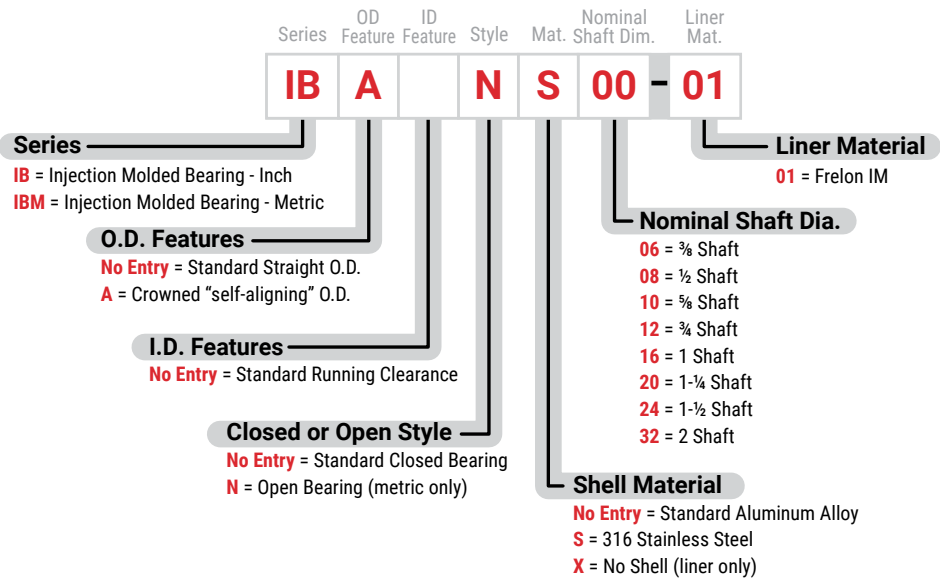

EconoGlide Linear Plain Bearings IB & IBL

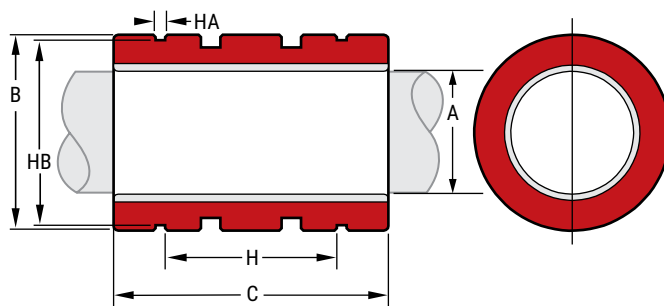

Dimensional Information

Nominal Size in.	Part No. Closed	A Standard Bearing I.D.		B Standard Bearing O.D.		C Length		Concentric MAX.	Bearing Weight lb.
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
3/8	IB06	0.3766	0.3782	0.6240	0.6250	0.860	0.875	0.0010	0.0102
1/2	IB08	0.5016	0.5032	0.8740	0.8750	1.235	1.250	0.0010	0.0142
5/8	IB10	0.6266	0.6282	1.1240	1.1250	1.485	1.500	0.0010	0.0801
3/4	IB12	0.7516	0.7532	1.2490	1.2500	1.610	1.625	0.0010	0.0941
1	IB16	1.0016	1.0032	1.5613	1.5625	2.235	2.250	0.0010	0.2031
1-1/4	IB20	1.2520	1.2541	1.9880	2.0000	2.610	2.625	0.0010	0.4022
1-1/2	IB24	1.5020	1.5041	2.3738	2.3750	2.985	3.000	0.0010	0.6511
2	IB32	2.0024	2.0051	2.9986	3.0000	3.985	4.000	0.0010	1.4000

Mounting Dimensions

Nominal Size in.	Part No. Closed	H	HA	HB	Truarc Ret. Ring Part No.	J	JA	JB	Parker O'Ring Part No.
		Between Ret. Rings	Ret. Ring Grv. Width	Ret. Ring Grv. Dia.		Between O'Ring Grvs.	O'Ring Grv. Width	O'Ring Grv. Dia.	
3/8	IB06	0.562	0.041	0.587	N 5100-62	0.187	0.080	0.524	2-012
1/2	IB08	0.875	0.048	0.820	N 5100-87	0.250	0.125	0.712	2-113
5/8	IB10	1.000	0.058	1.060	N 5100-112	0.312	0.125	0.962	2-117
3/4	IB12	1.062	0.058	1.177	N 5100-125	0.312	0.125	1.087	2-119
1	IB16	1.625	0.070	1.471	N 5100-156	0.500	0.125	1.399	2-123
1-1/4	IB20	1.875	0.070	1.889	N 5100-200	0.625	0.125	1.837	2-129
1-1/2	IB24	2.250	0.089	2.241	N 5100-237	0.750	0.162	2.152	2-225
2	IB32	3.000	0.105	2.839	N 5100-300	1.000	0.189	2.775	2-229

Load & Speed Data

Part No.	Effective Surface Area SQ. in.	MAX. Static Load (lb) Frelon IM
IB06	0.228	828
IB08	0.436	1,575
IB10	0.657	2,365
IB12	0.851	3,077
IB16	1.575	5,678
IB20	2.298	8,287
IB24	3.149	11,358
IB32	5.595	20,198



Plain Bearing Accessories:
Retaining Rings, Seals, O-Rings—page 31



Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94



**Configure
Online**

Ordering Information

Simplicity Linear Plain Bearings

Series	OD Feature	ID Feature	Style	Mat.	Nominal Shaft Dim.	Seals	Liner Mat.	Lubrication	Mod.
FL	A	C	N	S	16	D	E	JKM	Q

Series

FL = Standard Inch Series
FLR = Supergroove Interchange
 Available only with **FL06, 08, 12, 16**

FM = ISO Metric Series
FMT = Compact ISO Metric Thin Wall Series
FG = "FAG™" Thin Wall Interchange

FJ = JIS Standard Series

PS = Inch Series Sleeve Bearings
PSF = Inch Series Flange Bearings

PSM = ISO Metric Series Sleeve Bearings
PSFM = ISO Metric Series Flange Bearings

O.D. Features

No Entry = Standard straight O.D. bearing
A = Crowned "self-aligning" O.D. bearing (closed only)
 Available only on **FL, FM, FJ** series

I.D. Features

No Entry = Standard precision running clearance (I.D.)
C = Compensated running clearance (I.D.)
 Does NOT apply to **PS, PSF, PSM, PSFM**

Closed or Open Style

No Entry = Standard closed bearing
N = Open series bearing (not available in **FLA, FMA, and FJA**)
 Available only on **FL, FM, FJ** series

Bearing Shell Material

Available ONLY on the **FL, FM, FMT, FG, FJ** series
No Entry = Standard aluminum alloy
***S** = 316 Stainless Steel
 * Made to order. No finish plating or anodize available.

Special Modifications

No Entry = Standard Options
Q = Shipped Oil Free
 (contact PBC Linear before ordering)

Internal Lubrication

No Entry = Standard bearing - No lube system
JKM = Thru hole, and internal felt wick to help lubrication retention and flow.
 JKM available with **FL08-FL64, FM12-FM80, FJ20-FJ150**

Bearing Liner Material

No Entry = Standard Frelon GOLD® liner for hardened steel, ceramic coated, and 400 series stainless steel shafting
***E** = Frelon J® liner for soft shafting (aluminum, 300 series stainless steel, etc.)
 * Limited availability may require special quote
W = Food grade liner (contact PBC Linear before ordering)

Seal Options

D = Double seals of standard Polymod® material
DU = Double seals of moly impregnated urethane material
DV = Double seals of viton - high temperature material
 D, DU, and DV seals available with **FL08-FL32**
 DU seals available with **FM20-FM80, FJ20-FJ120**

Nominal Shaft Diameter

English units in 16ths of an inch
 Metric units in mm



Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

The data and specifications in this publication have been carefully compiled and are believed to be accurate and correct. However, it is the responsibility of the user to determine and ensure the suitability of PBC Linear® products for a specific application. PBC Linear's only obligation will be to repair or replace without charge, any defective components if returned promptly. No liability is assumed beyond such replacement. Specifications are subject to change without notice. Consult www.pbclinear.com for the latest technical updates.

Ordering Information

Simplicity Linear Plain Bearings with Housings



Configure
Online

Series	Style	Housing ID	ID Feature	Mat.	Nominal Shaft Dim.	ID Feature	Seals	Liner Mat.	Lubrication	Mod.
P	N	B	E		16	C	D	E	JKM	Q

Series

P = Standard Inch Pillow Blocks (FL)

PW = Inch Twin Pillow Blocks (FL)

PM = ISO Metric Pillow Blocks (FM)

SFP = Inch Single Flange Mounts (FL)

DFP = Inch Double Flange Mounts (FL)

SDSZ = Single Flange Mount Die Set (FLA)

DDSZ = Double Flange Mount Die Set (FLA)

PACZ = Inch Die Set Bearings

PACMZ = ISO Metric Die Set Bearings

SFPM = ISO Metric Single Flange Bearings

DFPM = ISO Metric Double Flange Bearings

CFPM = ISO Metric Double Center Flange Bearings

SFPJ = JIS Metric Single Flange Bearings

DFPJ = JIS Metric Double Flange Bearings

CFPJ = JIS Metric Double Center Flange Bearings

Notes: Standard Simplicity bearings are installed in housings.
Metric flange bearings do not have bearing inserts.

Closed or Open Style

No Entry = Standard Closed Series

N = Open Series

Available only on **P**, **PW**, **PM** series

Housing I.D. Features

No Entry = Standard spherical "self-aligning" I.D. in the housing.
(Uses standard straight O.D. bearings.)

B = Straight I.D. housing.
(For rigid fit use standard bearing. For self-alignment use FLA bearings.)
Available only on **P**, **PW**, **PM**, **SFP**, **DFP**, **SDS**, **DDS** series

No Entry = Standard Square Flange

R = Round Flange

Available only on **SFPM**, **DFPM**, **CFPM**, **SFPJ**, **DFPJ**, **CFPJ** series

Housing Only

No Entry = Housings with bearings included

E = Empty housings with NO bearing included

Material

Z = Aluminum, Available only on **PAC**/**PACM** Diesets

Note: Steel no longer offered

S = SST Pillow Blocks (use **FLA** BRG, PB, Retainer)

Special Modifications

No Entry = Standard Options

Q = Shipped Oil Free
(contact PBC Linear before ordering)

Internal Lubrication

No Entry = Standard pillowblock assembly with no lubrication system

JKM = Thru holes and internal felt wick to help lubrication retention and flow 1/4-28 Zerk
Zerk fitting installed into pillow block, other housing, or directly into die sets **PAC** & **PACM**.

Bearing Liner Material

No Entry = Standard Frelon GOLD® liner for hardened steel or ceramic coated aluminum

***E** = Special Frelon J® liner for soft shafting
(aluminum, 300 series stainless steel, etc.)

*** Limited availability may require special quote**

W = Food grade liner (contact PBC Linear before ordering)

Seal Options

D = Double seals of standard Polymod® material

DU = Double seals of moly impregnated urethane material

DV = Double seals of viton - high temperature material

PAC and **PACM** available only as:

S = Single seals of standard Polymod® material

SU = Single seals of moly impregnated urethane material

SV = Single seals of viton - high temperature material

Bearing I.D. Features

No Entry = Standard Precision running clearance on the I.D.

C = Compensated running clearance on the I.D.

Nominal Shaft Diameter

English units in 16ths of an inch

Metric units in mm




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

This catalog and part numbering system is designed to represent all possibilities which may not be standard parts.
These are options only—combinations could lead to unavailable parts. Contact PBC Linear at 800-962-8979 for information.

Simplicity® Linear Plain Bearings

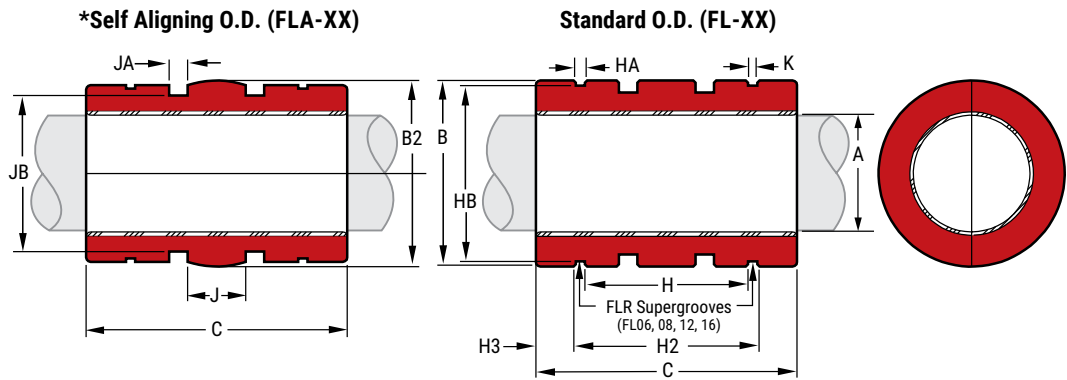

*Except for the O.D., bearings with the self-aligning feature have the same dimensions and tolerances as the standard bearing. There is a spherical crown on the O.D. to create the self-aligning feature. They are for use in a straight bore housing. Add an "A" to the part number for self-aligning bearings.

Dimensional Information

Precision I.D. Series Similar to Preloaded Ball Bearing				Compensated I.D. Series Allows additional Running Clearance				Nominal Size	B Standard O.D.		b2 Self-Aligning FLA Crown O.D.		C Length		Con- centric MAX.	Bearing Weight lb.	K FLR Ret. Ring Grv.
Part No.	Open	MIN.	MAX.	Part No.	Open	MIN.	MAX.		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.			
FL03	N/A	0.1877	0.1884	FLC03	N/A	0.1897	0.1904	3/16	0.3740	0.3750	0.3725	0.3735	0.5470	0.5620	0.0010	0.0030	N/A
FL04	FLN04	0.2502	0.2511	FLC04	FLCN04	0.2522	0.2531	1/4	0.4990	0.5000	0.4975	0.4985	0.7350	0.7500	0.0010	0.0090	N/A
FL06	FLN06	0.3752	0.3761	FLC06	FLCN06	0.3772	0.3781	3/8	0.6240	0.6250	0.6225	0.6235	0.8600	0.8750	0.0010	0.0160	0.0720
FL08	FLN08	0.5002	0.5013	FLC08	FLCN08	0.5022	0.5033	1/2	0.8740	0.8750	0.8725	0.8735	1.2350	1.2500	0.0010	0.0410	0.0800
FL10	FLN10	0.6252	0.6263	FLC10	FLCN10	0.6272	0.6283	5/8	1.1240	1.1250	1.1225	1.1235	1.4850	1.5000	0.0010	0.0910	N/A
FL12	FLN12	0.7503	0.7516	FLC12	FLCN12	0.7533	0.7546	3/4	1.2490	1.2500	1.2475	1.2485	1.6100	1.6250	0.0010	0.1090	0.1710
FL16	FLN16	1.0003	1.0016	FLC16	FLCN16	1.0033	1.0046	1	1.5613	1.5625	1.5599	1.5609	2.2350	2.2500	0.0010	0.2280	0.1330
FL20	FLN20	1.2504	1.2519	FLC20	FLCN20	1.2544	1.2559	1-1/4	1.9988	2.0000	1.9974	1.9984	2.6100	2.6250	0.0010	0.4590	N/A
FL24	FLN24	1.5004	1.5019	FLC24	FLCN24	1.5044	1.5059	1-1/2	2.3738	2.3750	2.3724	2.3734	2.9850	3.0000	0.0010	0.7250	N/A
FL32	FLN32	2.0004	2.0022	FLC32	FLCN32	2.0054	2.0072	2	2.9986	3.0000	2.9973	2.9983	3.9850	4.0000	0.0010	1.4420	N/A
FL40	FLN40	2.5004	2.5022	FLC40	FLCN40	2.5054	2.5072	2-1/2	3.7484	3.7500	3.7472	3.7482	4.9850	5.0000	0.0013	2.8160	N/A
FL48	FLN48	3.0004	3.0022	FLC48	FLCN48	3.0064	3.0082	3	4.4980	4.5000	4.4970	4.4980	5.9850	6.0000	0.0015	4.9140	N/A
FL64	FLN64	4.0005	4.0026	FLC64	FLCN64	4.0065	4.0086	4	5.9980	6.0000	5.9970	5.9980	7.9850	8.0000	0.0020	11.8360	N/A

Mounting Dimensions


Part No.		Nominal Size	H	HA	HB	Truarc Ret. Ring Part No.	J	JA	JB	Parker O'Ring Part No.	H2	H3
Closed	Open	in.	Between Ret. Rings	Ret. Ring Grv. Width	Ret. Ring Grv. Dia.		Between O'Ring Grvs.	O'Ring Grv. Width	O'Ring Grv. Dia.		FLR Between Rings	FLR Ring Edge
FL03	N/A	3/16	0.375	0.030	0.352	N 5100-37	N/A	N/A	N/A	N/A	N/A	N/A
FL04	FLN04	1/4	0.437	0.041	0.467	N 5100-50	0.125	0.080	0.399	2-010	N/A	N/A
FL06	FLN06	3/8	0.562	0.041	0.587	N 5100-62	0.187	0.080	0.524	2-012	0.711/0.701	0.112
FL08	FLN08	1/2	0.875	0.048	0.820	N 5100-87	0.250	0.125	0.712	2-113	1.042/1.032	0.135
FL10	FLN10	5/8	1.000	0.058	1.060	N 5100-112	0.312	0.125	0.962	2-117	N/A	N/A
FL12	FLN12	3/4	1.062	0.058	1.177	N 5100-125	0.312	0.125	1.087	2-119	1.281/1.271	0.220
FL16	FLN16	1	1.625	0.070	1.471	N 5100-156	0.500	0.125	1.399	2-123	1.895/1.885	0.239
FL20	FLN20	1-1/4	1.875	0.070	1.889	N 5100-200	0.625	0.125	1.837	2-129	N/A	N/A
FL24	FLN24	1-1/2	2.250	0.089	2.241	N 5100-237	0.750	0.162	2.152	2-225	N/A	N/A
FL32	FLN32	2	3.000	0.105	2.839	N 5100-300	1.000	0.189	2.775	2-229	N/A	N/A
FL40	FLN40	2-1/2	3.750	0.123	3.553	N 5100-375	1.250	0.250	3.408	2-340	N/A	N/A
FL48	FLN48	3	4.500	0.123	4.309	N 5100-450	1.500	0.287	4.158	2-346	N/A	N/A
FL64	FLN64	4	6.000	0.145	5.748	N 5100-600	2.000	0.287	5.660	2-356	N/A	N/A

Note: FLR is only available on FL06, FL08, FL12 and FL16.


Simplicity® Linear Plain Bearings

Linear Plain Bearings FL & FLN


FLN 04 - FLN 06

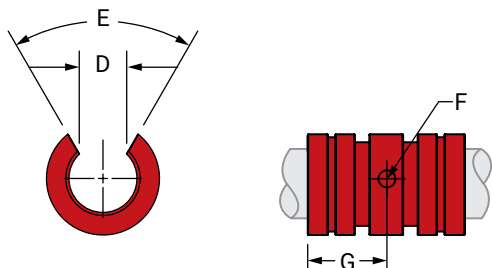


FLN 08

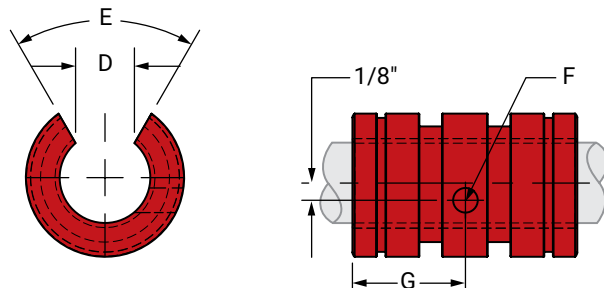

FLN 10

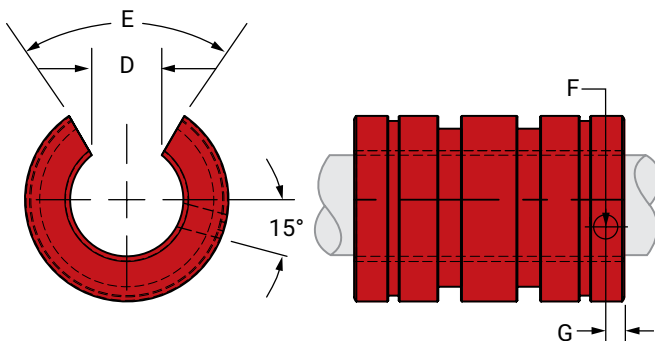

FLN 12 THRU FLN 64

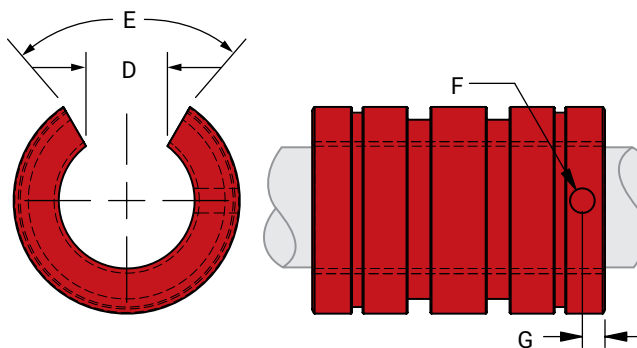

Open Dimensional Information

Part No.		Nominal Size	D Slot Wide MIN.	E Slot Angle	F Retaining Hole Dia.	G Retaining Hole Locate	Bearing Weight
Precision	Compensated	in.				in.	lb.
FLN04	FLCN04	1/4	0.188	60°	0.094	3/8	0.008
FLN06	FLCN06	3/8	0.250	60°	0.094	7/16	0.013
FLN08	FLCN08	1/2	0.313	60°	0.136	5/8	0.034
FLN10	FLCN10	5/8	0.375	60°	0.136	1/8	0.072
FLN12	FLCN12	3/4	0.438	60°	0.136	1/8	0.091
FLN16	FLCN16	1	0.563	60°	0.136	1/8	0.184
FLN20	FLCN20	1-1/4	0.625	60°	0.201	3/16	0.381
FLN24	FLCN24	1-1/2	0.750	60°	0.201	3/16	0.603
FLN32	FLCN32	2	1.000	60°	0.265	5/16	1.192
FLN40	FLCN40	2-1/2	1.250	60°	0.265	5/16	2.334
FLN48	FLCN48	3	1.500	60°	0.265	5/16	4.080
FLN64	FLCN64	4	2.000	60°	0.265	5/16	9.870

Note: All other dimensions same as closed bearing. FrelonGOLD® and Frelon® J are registered trademarks of PBC Linear®.



Plain Bearing Accessories:
Retaining Rings, Seals, O-Rings—page 31



Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Load & Speed Data

Part No.	Effective Surface Area SQ. in.	MAX. Static Load lb.	
		Frelon GOLD	J & W
FL03	0.110	220	100
FL04	0.200	600	300
FL06	0.340	1,020	510
FL08	0.650	1,950	975
FL10	0.980	2,940	1,470
FL12	1.270	3,810	1,905
FL16	2.350	7,050	3,525
FL20	3.430	10,830	5,415
FL24	4.700	14,100	7,050
FL32	8.350	25,050	12,525
FL40	13.000	39,000	19,500
FL48	18.800	56,400	28,200
FL64	33.500	100,500	50,250





Note: MAX PV (ft./min. * psi)
FrelonGOLD = 20000 PV Frelon J = 10000 PV

MAX Speed Running Dry (ft./min.)
FrelonGOLD = 300 sfm Frelon J = 140 sfm

MAX Speed Running with Lubrication (ft./min.)
FrelonGOLD = 825 sfm Frelon J = 400 sfm

Simplicity® Pillow Blocks




Plain Bearings – Closed Pillow Blocks P

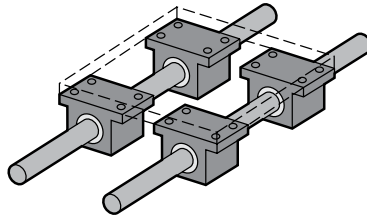

Part No.		Nom. Brg. I.D.	A Centerline	B Width	C Length	D Height	E +/- 0.010	F +/- 0.010	G Body Width	H		J Flange Thick	K	M Grv. Space	O Grv. Width	P Grv. Dia.	Retaining Ring Part No.	MAX Static Load lb.		Assem. WT. lb.
Precision	Compensated									Bolt	Hole							FRELON®	J & W	
P04	P04C	1/4	0.437	1.625	1.19	0.813	1.312	0.750	1.000	#6	5/32"	0.188	0.750	0.750	0.039	0.532	6010026	600	300	0.099
P06	P06C	3/8	0.500	1.750	1.31	0.938	1.437	0.875	1.125	#6	5/32"	0.188	0.875	0.875	0.039	0.665	6010027	1,020	510	0.129
P08	P08C	1/2	0.687	2.000	1.69	1.250	1.688	1.000	1.375	#6	5/32"	0.250	1.125	1.250	0.046	0.931	6010028	1,950	975	0.250
P10	P10C	5/8	0.875	2.500	1.94	1.625	2.125	1.125	1.750	#8	3/16"	0.281	1.438	1.500	0.056	1.197	6010029	2,940	1,470	0.500
P12	P12C	3/4	0.937	2.750	2.06	1.750	2.375	1.250	1.875	#8	3/16"	0.313	1.563	1.625	0.056	1.330	6010030	3,710	1,905	0.580
P16	P16C	1	1.187	3.250	2.81	2.188	2.875	1.750	2.375	#10	7/32"	0.375	1.938	2.250	0.068	1.671	6010031	7,050	3,525	1.000
P20	P20C	1-1/4	1.500	4.000	3.63	2.813	3.500	2.000	3.000	#10	7/32"	0.438	2.500	2.625	0.068	2.122	6010032	10,290	5,145	2.000
P24	P24C	1-1/2	1.750	4.750	4.00	3.250	4.125	2.500	3.500	1/4"	9/32"	0.500	2.875	3.000	0.086	2.519	6010033	14,100	7,050	3.000
P32	P32C	2	2.125	6.000	5.00	4.063	5.250	3.250	4.500	3/8"	13/32"	0.625	3.625	4.000	0.103	3.182	6010034	25,050	12,525	6.500

Notes: (1) Standard, pre-assembled pillow blocks include self-aligning housing and precision bearing.
 (2) All standard pillow blocks use standard FL series bearings.
 (3) Straight bore, pre-assembled pillow blocks use standard FL series bearings.

Plain Bearings – Open Pillow Blocks PN

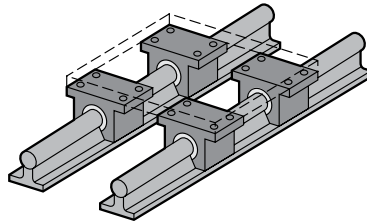

Part No.		Nom. Brg. I.D.	A Centerline	B	C	E	F	G	H		J	K	M	O	P	R	Retaining Ring Part No.	MAX. Static Load lb.		Assem. WT.	S
Open									Frelon	J & W								lb.	Width		
Precision	Compensated																				
PN08	PN08C	1/2	0.687	2.000	1.50	1.688	1.000	1.375	#6	5/32"	0.250	1.125	1.250	0.046	0.931	0.313	6010035	1,950	975	0.250	1.438
PN10	PN10C	5/8	0.875	2.500	1.75	2.125	1.125	1.750	#8	3/16"	0.281	1.438	1.500	0.056	1.197	0.375	6010036	2,940	1,470	0.500	1.813
PN12	PN12C	3/4	0.937	2.750	1.88	2.375	1.250	1.875	#8	3/16"	0.313	1.563	1.625	0.056	1.330	0.438	6010037	3,710	1,905	0.580	1.938
PN16	PN16C	1	1.187	3.250	2.63	2.875	1.750	2.375	#10	7/32"	0.375	1.938	2.250	0.068	1.671	0.563	6010038	7,050	3,525	1.000	2.438
PN20	PN20C	1-1/4	1.500	4.000	3.38	3.500	2.000	3.000	#10	7/32"	0.438	2.500	2.625	0.068	2.122	0.625	6010039	10,290	5,145	2.000	3.125
PN24	PN24C	1-1/2	1.750	4.750	3.75	4.125	2.500	3.500	1/4"	9/32"	0.500	2.875	3.000	0.086	2.519	0.750	6010040	14,100	7,050	3.000	3.625
PN32	PN32C	2	2.125	6.000	4.75	5.250	3.250	4.500	3/8"	13/32"	0.625	3.625	4.000	0.103	3.182	1.000	6010041	25,050	12,525	6.500	4.688

Notes: (1) Standard, pre-assembled pillow blocks include self-aligning housing and precision bearing.
 (2) All standard pillow blocks use standard FL series bearings.



Simplicity Linear Slides: Pre-Assembled Pillow Block, Shaft, and Support Rail—page 110






Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Simplicity® Stainless Steel Pillow Blocks




Plain Bearings – Closed Stainless Steel Pillow Blocks **PBS**

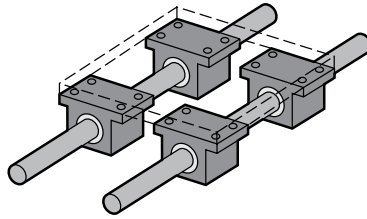

Part No.		Nom. Brg. I.D.	A	B	C	D	E	F	G	H		J	K	M	O	P	Retaining Ring Part No.	MAX Static Load lb.	Assem. WT.
Precision	Compensated	in.	+/- 0.001	Width	Length	Height	+/- 0.010	+/- 0.010	Body	Bolt	Hole	Thick		Grv. Space	Grv. Width	Grv. Dia.		FRELON®	lb.
PBS08E	PBS08CE	1/2	0.687	2.000	1.69	1.250	1.688	1.000	1.375	#6	5/32"	0.250	1.120	1.250	0.046	0.931	6010054	975	0.722
PBS10E	PBS10CE	5/8	0.875	2.500	1.94	1.625	2.125	1.125	1.750	#8	3/16"	0.281	1.438	1.625	0.056	1.197	6010055	1,470	1.387
PBS12E	PBS12CE	3/4	0.937	2.750	2.06	1.750	2.375	1.250	1.875	#8	3/16"	0.313	1.563	1.750	0.056	1.330	6010056	1,905	1.693
PBS16E	PBS16CE	1	1.187	3.250	2.81	2.188	2.875	1.750	2.375	#10	7/32"	0.375	1.938	2.188	0.068	1.671	6010057	3,525	3.521
PBS20E	PBS20CE	1-1/4	1.500	4.000	3.63	2.813	3.500	2.000	3.000	#10	7/32"	0.438	2.500	2.810	0.068	2.122	6010058	5,145	7.305
PBS24E	PBS24CE	1-1/2	1.750	4.750	4.00	3.250	4.125	2.500	3.500	1/4"	9/32"	0.500	2.875	3.250	0.086	2.519	6010059	7,050	10.732
PBS32E	PBS32CE	2	2.125	6.000	5.00	4.063	5.250	3.250	4.500	3/8"	13/32"	0.625	3.625	4.060	0.103	3.182	6010060	12,525	21.596

Notes: Straight bore, pre-assembled pillow blocks use standard FL or FLC 316 stainless steel series bearings.

Plain Bearings – Open Stainless Steel Pillow Blocks **PNBS**


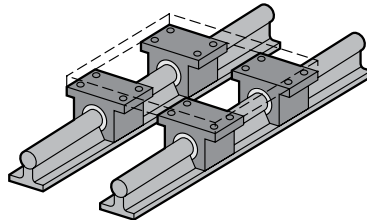


Part No.		Nom. Brg. I.D.	A	B	C	E	F	G	H		J	K	M	O	P	R	Retaining Ring Part No.	MAX. Static Load lb.	Assem. WT.
Precision	Compensated	in.	+/- 0.001	Width	Length	+/- 0.010	+/- 0.010	Body	Bolt	Hole	Thick	Height	Grv. Space	Grv. Width	Grv. Dia.	Min. Open		Frelon	lb.
PNBS08E	PNBS08CE	1/2	0.687	2.000	1.50	1.688	1.000	1.375	#6	5/32"	0.250	1.125	1.250	0.046	0.931	0.313	6010064	975	0.529
PNBS10E	PNBS10CE	5/8	0.875	2.500	1.75	2.125	1.125	1.750	#8	3/16"	0.281	1.438	1.500	0.056	1.197	0.375	6010066	1,470	1.031
PNBS12E	PNBS12CE	3/4	0.937	2.750	1.88	2.375	1.250	1.875	#8	3/16"	0.313	1.563	1.625	0.056	1.330	0.438	6010068	1,905	1.274
PNBS16E	PNBS16CE	1	1.187	3.250	2.63	2.875	1.750	2.375	#10	7/32"	0.375	1.938	2.250	0.068	1.671	0.563	6010070	3,525	2.735
PNBS20E	PNBS20CE	1-1/4	1.500	4.000	3.38	3.500	2.000	3.000	#10	7/32"	0.438	2.500	2.625	0.068	2.122	0.625	6010072	5,145	5.627
PNBS24E	PNBS24CE	1-1/2	1.750	4.750	3.75	4.125	2.500	3.500	1/4"	9/32"	0.500	2.875	3.000	0.086	2.519	0.750	6010074	7,050	8.388
PNBS32E	PNBS32CE	2	2.125	6.000	4.75	5.250	3.250	4.500	3/8"	13/32"	0.625	3.625	4.000	0.103	3.182	1.000	6010076	12,525	16.970

Notes: Straight bore, pre-assembled pillow blocks use standard FLN or FLCN 316 stainless steel series bearings.

Simplicity® Twin Pillow Blocks



Plain Bearings – Closed Twin Pillow Blocks PW

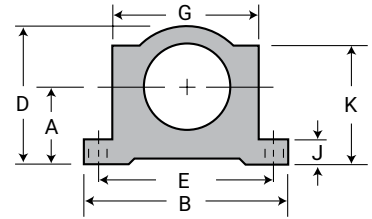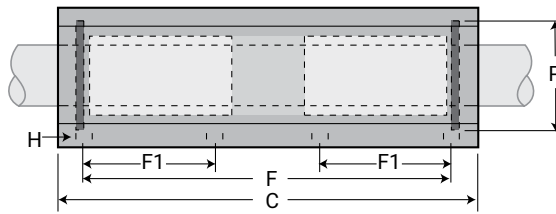

Part No.		Nom. Brg. I.D.	A	B	C	D	E	F	F1	G	H		J	P	Retaining Ring Part No.	Max Static Load lb.		Assem. WT.	
Closed			Centerline					+/-	+/-	+/-	Body	Bolt	Hole	Flange		Grv.	Frelon®		
Precision	Compensated	in.	+/- 0.001	Width	Length	Height	0.010	0.010	0.010	Width	Bolt	Hole	Thick	K	Dia.	GOLD	J & W	lb.	
PW04	PW04C	1/4	0.437	1.625	2.500	0.813	1.3120	2.0000	0.750	1.000	#6	5/32"	0.188	0.750	0.532	6010026	1,200	600	0.197
PW06	PW06C	3/8	0.500	1.750	2.750	0.938	1.4370	2.2500	0.875	1.125	#6	5/32"	0.188	0.875	0.665	6010027	2,040	1,020	0.258
PW08	PW08C	1/2	0.687	2.000	3.500	1.250	1.6880	2.5000	1.000	1.375	#6	5/32"	0.250	1.125	0.931	6010028	3,900	1,950	0.500
PW10	PW10C	5/8	0.875	2.500	4.000	1.625	2.1250	3.0000	1.125	1.750	#8	3/16"	0.281	1.438	1.197	6010029	5,880	2,940	1.000
PW12	PW12C	3/4	0.937	2.750	4.500	1.750	2.3750	3.5000	1.250	1.875	#8	3/16"	0.313	1.563	1.330	6010030	7,620	3,810	1.125
PW16	PW16C	1	1.187	3.250	6.000	2.188	2.8750	4.5000	1.750	2.375	#10	7/32"	0.375	1.938	1.671	6010031	14,100	7,050	2.188
PW20	PW20C	1-1/4	1.500	4.000	7.500	2.813	3.5000	5.5000	2.000	3.000	#10	7/32"	0.438	2.500	2.122	6010032	20,580	10,290	4.250
PW24	PW24C	1-1/2	1.750	4.750	9.000	3.250	4.1250	6.5000	2.500	3.500	1/4"	9/32"	0.500	2.875	2.519	6010033	28,200	14,100	6.375
PW32	PW32C	2	2.125	6.000	10.000	4.063	5.2500	8.2500	3.250	4.500	3/8"	13/32"	0.625	3.625	3.182	6010034	50,100	25,050	13.500

- Notes:** (1) Standard, pre-assembled pillow blocks include self-aligning housing and precision bearing.
 (2) All standard pillow blocks use standard FL series bearings.
 (3) Twin Closed Pillow Blocks use a spacer to separate the bearings.
 (4) Twin pillow blocks, closed, with no seal option: Use two standard bearings, based on compensated or standard option.
 (5) Twin pillow blocks, closed, with double seal option: Use two single seal bearings.

Plain Bearings – Open Twin Pillow Blocks PWN

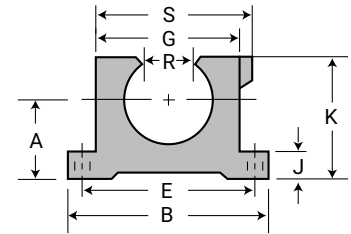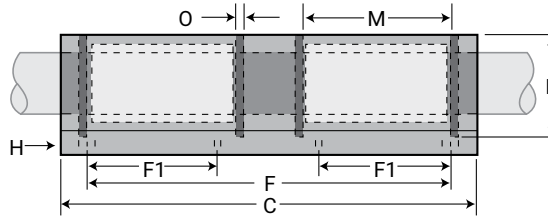


Part No.		Nom. Brg. I.D.	A	B	C	E	F	F1	G			J		M	O	P	R	Retaining Ring Part No.	MAX. Static Load lb.		Assem. WT.	S
Open			Centerline			+/-	+/-	+/-	Body	H	Flange	K	Grv.	Grv.	Grv.	MIN.			Frelon			Overall
Precision	Compensated		in.	+/-0.001	Width	Length	0.010	0.010	0.010	Width	Bolt	Hole	Thick	Height	Space	Width	Dia.		Open	GOLD		J & W
PWN08	PWN08C	1/2	0.687	2.000	3.500	1.688	2.500	1.000	1.375	#6	5/32"	0.250	1.125	1.250	0.046	0.931	0.313	6010035	3,900	1,950	0.400	1.438
PWN10	PWN10C	5/8	0.875	2.500	4.000	2.125	3.000	1.125	1.750	#8	3/16"	0.281	1.438	1.500	0.056	1.197	0.375	6010036	5,880	2,940	0.910	1.813
PWN12	PWN12C	3/4	0.937	2.750	4.500	2.375	3.500	1.250	1.875	#8	3/16"	0.313	1.563	1.625	0.056	1.330	0.438	6010037	7,620	3,810	1.060	1.938
PWN16	PWN16C	1	1.187	3.250	6.000	2.875	4.500	1.750	2.375	#10	7/32"	0.375	1.938	2.250	0.068	1.671	0.563	6010038	14,100	7,050	1.970	2.438
PWN20	PWN20C	1-1/4	1.500	4.000	7.500	3.500	5.500	2.000	3.000	#10	7/32"	0.438	2.500	2.625	0.068	2.122	0.625	6010039	20,580	10,290	3.725	3.125
PWN24	PWN24C	1-1/2	1.750	4.750	9.000	4.125	6.500	2.500	3.500	1/4"	9/32"	0.500	2.875	3.000	0.086	2.519	0.750	6010040	28,200	14,100	5.800	3.625
PWN32	PWN32C	2	2.125	6.000	10.000	5.250	8.250	3.250	4.500	3/8"	13/32"	0.625	3.625	4.000	0.103	3.182	1.000	6010041	50,100	25,050	12.125	4.688

- Notes:** (1) Standard, pre-assembled pillow blocks include self-aligning housing and precision bearing.
 (2) All standard pillow blocks use standard FL series bearings.
 (3) Twin pillowblocks, open, with no seal option: Use two standard open bearings, based on compensated or standard option.
 (4) Twin pillowblocks, open, with double seal option: Use two double seal bearings.

Simplicity® Flange Mounts

Flange Mounts SFP


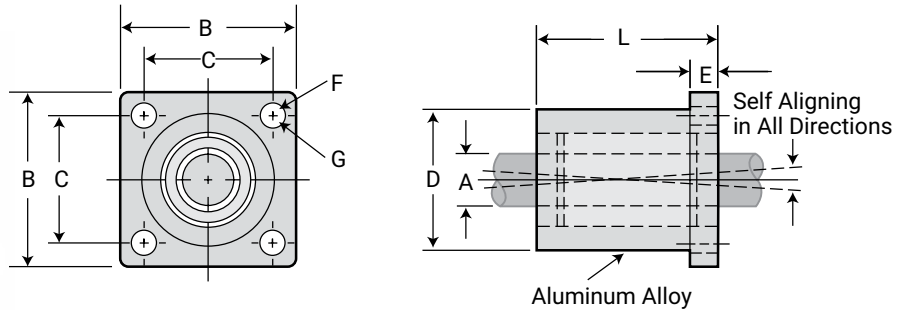


DIMENSIONAL INFORMATION

Part No.		A Nominal Bearing Size	B Flange Square	C Hole Spacing	D Barrel Dia.	E Flange Length	F Bolt Size	G Hole Size	L Length Overall	MAX Static Load lb. Frelon®		Assembly Weight lb.
Precision	Compensated									GOLD	J & W	
SFP06	SFP06C	3/8"	1.25	1.00	0.875	0.188	#4	0.125	1.31	1,020	510	0.070
SFP08	SFP08C	1/2"	1.63	1.25	1.25	0.250	#8	0.187	1.687	1,950	975	0.175
SFP12	SFP12C	3/4"	2.38	1.75	1.75	0.375	#10	0.219	2.067	2,940	1,470	0.463
SFP16	SFP16C	1"	2.75	2.125	2.25	0.500	1/4"	0.281	2.812	3,810	1,905	1.206
SFP20	SFP20C	1 1/4"	3.88	3.00	2.62	0.625	3/8"	0.386	3.625	10,830	5,415	1.830

Notes: (1) All standard, pre-assembled SFP assemblies include a self-aligning housing and standard FL bearings - allowing the bearing to self-align.
(2) SFPB assemblies include a straight bore housing and standard FL bearings - allowing for a more rigid fit.

Flange Mounts DFP

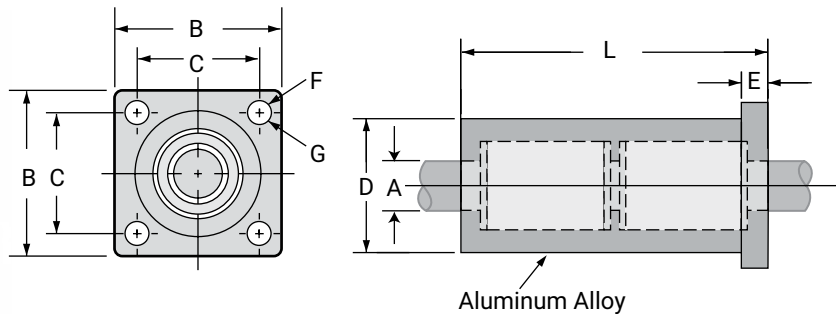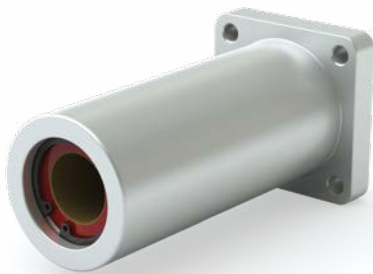

DIMENSIONAL INFORMATION

Part No.		A Nominal Bearing Size	B Flange Square	C Hole Spacing	D Barrel Dia.	E Flange Length	F Bolt Size	G Hole Size	L Length Overall	MAX Static Load lb. Frelon®		Assembly Weight lb.
Precision	Compensated									GOLD	J & W	
DFP08	DFP08 C	1/2"	1.63	1.25	1.25	0.250	#8	0.187	3.375	3,900	1,950	0.325
DFP12	DFP12 C	3/4"	2.38	1.75	1.75	0.375	#10	0.219	4.188	5,880	2,940	0.825
DFP16	DFP16 C	1"	2.75	2.125	2.25	0.500	1/4"	0.281	5.625	7,620	3,810	1.750

Notes: (1) All standard, pre-assembled DFP assemblies include a self-aligning housing and standard FL bearings - allowing the bearing to self-align.
(2) Straight bore DFPB assemblies include a straight bore housing and standard FL bearings - allowing for a more rigid fit.




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series-page 52 Metric Series-page 94

Simplicity® Die Set Flange Mounts

Flange Mounts SDS

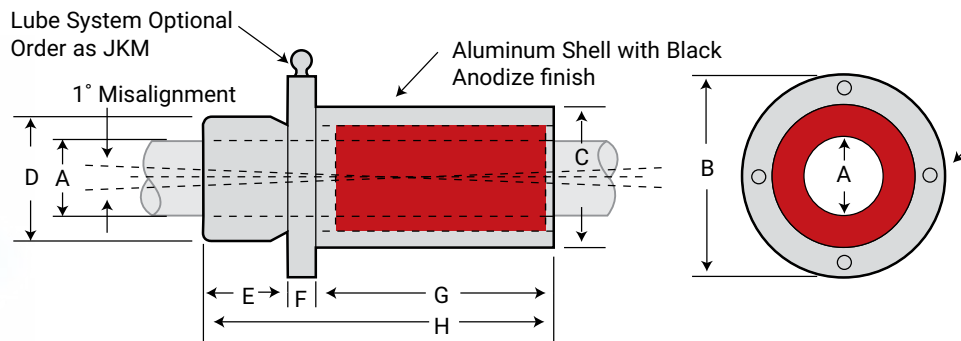

DIMENSIONAL INFORMATION


Part No.		A Nominal Bearing Size	B Flange O.D.	C Barrel Dia.		D Pilot Dia.		E Pilot Length	F Flange Length	G Head Length	H Overall Length	I Mounting Holes 4 Places			MAX Static Load lb. Frelon®		Assembly Weight lb.
Precision	Compensated			MIN.	MAX.	MIN.	MAX.					Bolt Size	Hole Size	Circle	GOLD	J & W	
SDSZ16	SDSZ16C	1"	3.00	2.098	2.100	1.4995	1.500	0.875	0.562	2.500	3.927	1/4"	0.281	2.550	7,050	3,525	0.941
SDSZ20	SDSZ20C	1-1/4"	3.50	2.598	2.600	1.7495	1.750	1.125	0.750	3.000	4.875	1/4"	0.281	3.050	10,290	5,145	1.852
SDSZ24	SDSZ24C	1-1/2"	4.25	2.998	3.000	1.9990	2.000	1.375	1.000	3.500	5.875	3/8"	0.406	3.650	14,100	7,050	2.983
SDSZ32	SDSZ32C	2"	5.00	3.748	3.750	2.4990	2.500	1.625	1.000	4.500	7.125	3/8"	0.406	4.400	25,050	12,525	5.032

Notes: (1) Shell material is aluminum.

(2) All standard, pre-assembled SDS assemblies include a straight bore housing and standard FLA bearings - allowing the bearing to self-align.

(3) SDSB assemblies include a straight bore housing and standard FL bearings - allowing for a more rigid fit.

Flange Mounts DDS

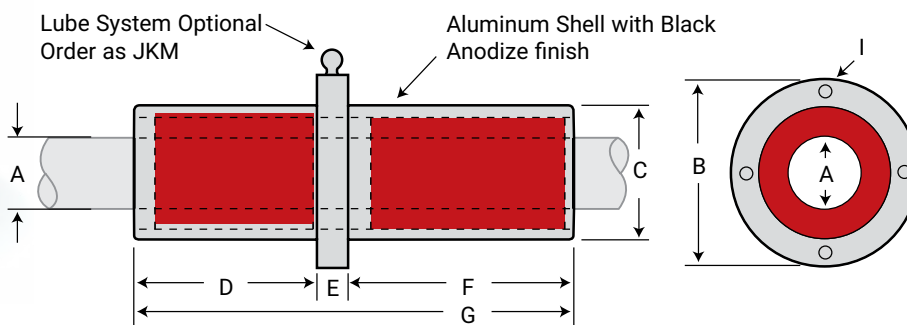

DIMENSIONAL INFORMATION

Part No.		A Nominal Bearing Size	B Flange O.D.	C Barrel Dia.		D Length	E Flange Length	F Length	G Overall Length	I Mounting Holes 4 Places			MAX Static Load lb. Frelon®		Assembly Weight lb.
Precision	Compensated			MIN.	MAX.					Bolt Size	Hole Size	Circle	GOLD	J & W	
DDSZ16	DDSZ16C	1"	3.00	2.098	2.100	2.5	0.562	3.500	6.563	1/4"	0.281	2.550	14,100	7,050	1.785
DDSZ20	DDSZ20C	1-1/4"	3.50	2.598	2.600	3	0.750	4.250	8.000	1/4"	0.281	3.050	20,580	10,290	3.203
DDSZ24	DDSZ24C	1-1/2"	4.25	2.998	3.000	3.5	1.000	5.000	9.500	3/8"	0.406	3.650	28,200	14,100	5.128
DDSZ32	DDSZ32C	2"	5.00	3.748	3.750	4.5	1.000	6.500	12.000	3/8"	0.406	4.400	50,100	25,050	9.015



Notes: (1) Shell material is aluminum.

(2) All standard, pre-assembled DDS assemblies include a straight bore housing and standard FLA bearings - allowing the bearing to self-align.

(3) All straight bore, pre-assembled DDSB assemblies include a straight bore housing and standard FL bearings - allowing for a more rigid fit.

Simplicity® Sleeve Bearings

Sleeve Bearings PS

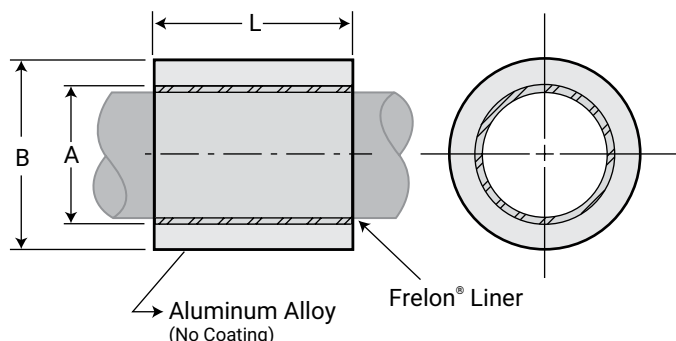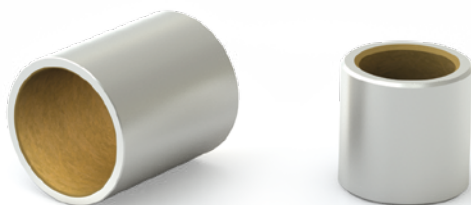

DIMENSIONAL INFORMATION

Part No.	Nominal Bearing Size			A Bearing I.D.		B O.D.		L Length		MAX. Static Load lb. Frelon®		Bearing Weight OZ.	Recommended Housing Bore			
	I.D.	O.D.	Length	MIN	MAX	MIN	MAX	MIN	MA.	GOLD	J & W		Slip Fit & Epoxy		Press Fit	
PS0305-02	3/16"	5/16"	1/4"	0.1890	0.1900	0.3135	0.3145	0.230	0.250	130	65	0.02	0.3145	0.3155	0.3125	0.3130
PS0305-04	3/16"	5/16"	1/2"	0.1890	0.1900	0.3135	0.3145	0.480	0.500	272	136	0.04	0.3145	0.3155	0.3125	0.3130
PS0406-02	1/4"	3/8"	1/4"	0.2515	0.2525	0.3760	0.3770	0.230	0.250	174	87	0.03	0.3770	0.3780	0.3750	0.3755
PS0406-03	1/4"	3/8"	3/8"	0.2515	0.2525	0.3760	0.3770	0.355	0.375	268	134	0.04	0.3770	0.3780	0.3750	0.3755
PS0406-04	1/4"	3/8"	1/2"	0.2515	0.2525	0.3760	0.3770	0.480	0.500	362	181	0.05	0.3770	0.3780	0.3750	0.3755
PS0610-04	3/8"	5/8"	1/2"	0.3765	0.3775	0.6260	0.6270	0.480	0.500	542	271	0.14	0.6270	0.6280	0.6250	0.6255
PS0610-06	3/8"	5/8"	3/4"	0.3765	0.3775	0.6260	0.6270	0.730	0.750	824	412	0.20	0.6270	0.6280	0.6250	0.6255
PS0710-06	7/16"	5/8"	3/4"	0.4390	0.4400	0.6260	0.6270	0.730	0.750	962	481	0.23	0.6270	0.6280	0.6250	0.6255
PS0812-04	1/2"	3/4"	1/2"	0.5015	0.5025	0.7510	0.7520	0.480	0.500	722	361	0.15	0.7520	0.7530	0.7500	0.7505
PS0812-06	1/2"	3/4"	3/4"	0.5015	0.5025	0.7510	0.7520	0.730	0.750	1098	549	0.25	0.7520	0.7530	0.7500	0.7505
PS0812-08	1/2"	3/4"	1"	0.5015	0.5025	0.7510	0.7520	0.980	1.000	1474	737	0.35	0.7520	0.7530	0.7500	0.7505
PS1014-06	5/8"	7/8"	3/4"	0.6265	0.6275	0.8760	0.8770	0.730	0.750	1372	686	0.30	0.8770	0.8780	0.8750	0.8755
PS1014-08	5/8"	7/8"	1"	0.6265	0.6275	0.8760	0.8770	0.980	1.000	1842	921	0.45	0.8770	0.8780	0.8750	0.8755
PS1216-08	3/4"	1"	1"	0.7515	0.7525	1.0010	1.0020	0.980	1.000	2210	1,105	0.50	1.0020	1.0030	0.9995	1.0000
PS1216-10	3/4"	1"	1.25"	0.7515	0.7525	1.0010	1.0020	1.230	1.250	2777	1,389	0.65	1.0020	1.0030	0.9995	1.0000
PS1620-12	1"	1-1/4"	1-1/2"	1.0015	1.0025	1.2510	1.2520	1.480	1.500	4446	2,223	0.95	1.2520	1.2530	1.2490	1.2500
PS2024-16	1-1/4"	1-1/2"	2"	1.2515	1.2525	1.5010	1.5020	1.980	2.000	7434	3,717	1.55	1.5020	1.5030	1.4990	1.5000
PS2428-16	1-1/2"	1-3/4"	2"	1.5015	1.5025	1.7510	1.7520	1.980	2.000	8918	4,459	1.80	1.7520	1.7530	1.7490	1.7500
PS2832-24	1-3/4"	2"	3"	1.7515	1.7525	2.0010	2.0020	2.980	3.000	15658	7,829	3.15	2.0020	2.0030	1.9990	2.0000
PS3236-24	2"	2-1/4"	3"	2.0015	2.0025	2.2510	2.2520	2.980	3.000	17894	8,947	3.55	2.2520	2.2530	2.2490	2.2500
PS4044-24	2-1/2"	2-3/4"	3"	2.5015	2.5025	2.7510	2.7520	2.980	3.000	22364	11,182	4.85	2.7520	2.7530	2.7490	2.7500
PS4852-28	3"	3-1/4"	3-1/2"	3.0015	3.0025	3.2510	3.2520	3.480	3.500	31336	15,668	6.10	3.2520	3.2530	3.2485	3.2495

ORDERING INFORMATION

PS	12	16	08
Type	I.D.	O.D.	Length
PS: Precision Sleeve Bearing	I.D. in 1/16" Increments	O.D. in 1/16" Increments	Length in 1/8" Increments

Note: Lengths not listed above must be specially quoted.
Additional sizes are available within our online configurator.

Configure Online



Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94



INSTALLATION INSTRUCTIONS


1. Slip the bearing sleeve into the housing and epoxy into place with Loctite® or similar type bonding agent.

CAUTION Do NOT let any of the adhesive touch the bearing liner. It will harden and interfere with the running clearance.

2. Freeze the bearings at 0°F (-17.75°C) for 30-45 minutes. Using gloves, remove the bearings from the freezer and slip them into the housing. As they heat to room temperature, full contact between the bearing and housing will be achieved. The greatest advantage to this technique over traditional pressing is greater accuracy in alignment.

Simplicity® Sleeve Bearings with Flange

Sleeve Bearings with Flange PSF

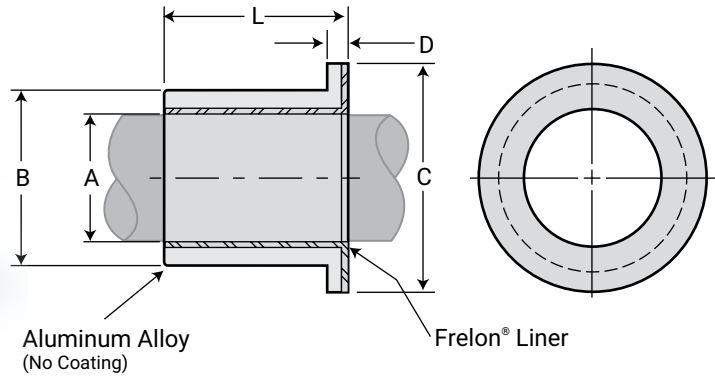

DIMENSIONAL INFORMATION

Part No.	Nominal Bearing Size			A Bearing I.D.		B O.D.		C Flange O.D.	D Flange Width	L Length		MAX. Static Load lb. Frelon®		Bearing Weight OZ.	Recommended Housing Bore			
	I.D.	O.D.	Length	MIN	MAX	MIN	MAX			MIN	MAX	GOLD	J & W		Slip Fit & Epoxy	Press Fit	MIN	MAX
PSF0305-02	3/16"	5/16"	1/4"	0.1890	0.1900	0.3135	0.3145	0.4370	0.0625	0.230	0.250	130	65	0.023	0.3145	0.3155	0.3125	0.3130
PSF0305-04	3/16"	5/16"	1/2"	0.1890	0.1900	0.3135	0.3145	0.4370	0.0625	0.480	0.500	272	136	0.044	0.3145	0.3155	0.3125	0.3130
PSF0406-02	1/4"	3/8"	1/4"	0.2515	0.2525	0.3760	0.3770	0.5000	0.0625	0.230	0.250	174	87	0.031	0.3770	0.3780	0.3750	0.3755
PSF0406-03	1/4"	3/8"	3/8"	0.2515	0.2525	0.3760	0.3770	0.5000	0.0625	0.355	0.375	268	134	0.044	0.3770	0.3780	0.3750	0.3755
PSF0406-04	1/4"	3/8"	1/2"	0.2515	0.2525	0.3760	0.3770	0.5000	0.0625	0.480	0.500	362	181	0.055	0.3770	0.3780	0.3750	0.3755
PSF0610-04	3/8"	5/8"	1/2"	0.3765	0.3775	0.6260	0.6270	0.8750	0.1250	0.480	0.500	542	271	0.20	0.6270	0.6280	0.6250	0.6255
PSF0610-06	3/8"	5/8"	3/4"	0.3765	0.3775	0.6260	0.6270	0.8750	0.1250	0.730	0.750	824	412	0.25	0.6270	0.6280	0.6250	0.6255
PSF0710-06	7/16"	5/8"	3/4"	0.4390	0.4400	0.6260	0.6270	0.9375	0.1250	0.730	0.750	962	481	0.20	0.6270	0.6280	0.6250	0.6255
PSF0812-04	1/2"	3/4"	1/2"	0.5015	0.5025	0.7510	0.7520	1.0000	0.1250	0.480	0.500	722	361	0.25	0.7520	0.7530	0.7500	0.7505
PSF0812-06	1/2"	3/4"	3/4"	0.5015	0.5025	0.7510	0.7520	1.0000	0.1250	0.730	0.750	1,098	549	0.30	0.7520	0.7530	0.7500	0.7505
PSF0812-08	1/2"	3/4"	1"	0.5015	0.5025	0.7510	0.7520	1.0000	0.1250	0.980	1.000	1,474	737	0.40	0.7520	0.7530	0.7500	0.7505
PSF1014-06	5/8"	7/8"	3/4"	0.6265	0.6275	0.8760	0.8770	1.0000	0.1250	0.730	0.750	1,372	686	0.35	0.8770	0.8780	0.8750	0.8755
PSF1014-08	5/8"	7/8"	1"	0.6265	0.6275	0.8760	0.8770	1.0000	0.1250	0.980	1.000	1,842	921	0.45	0.8770	0.8780	0.8750	0.8755
PSF1216-08	3/4"	1"	1"	0.7515	0.7525	1.0010	1.0020	1.2500	0.1250	0.980	1.000	2,210	1,105	0.55	1.0020	1.0030	0.9995	1.0000
PSF1620-12	1"	1-1/4"	1-1/2"	1.0015	1.0025	1.2510	1.2520	1.5000	0.1250	1.480	1.500	4,446	2,223	1.05	1.2520	1.2530	1.2490	1.2500
PSF2024-16	1-1/4"	1-1/2"	2"	1.2515	1.2525	1.5010	1.5020	1.7500	0.1250	1.980	2.000	7,434	3,717	1.80	1.5020	1.5030	1.4990	1.5000
PSF2428-16	1-1/2"	1-3/4"	2"	1.5015	1.5025	1.7510	1.7520	2.0000	0.1250	1.980	2.000	8,918	4,459	2.16	1.7520	1.7530	1.7490	1.7500
PSF2832-24	1-3/4"	2"	3"	1.7515	1.7525	2.0010	2.0020	2.2500	0.1250	2.980	3.000	15,658	7,829	3.30	2.0020	2.0030	1.9990	2.0000
PSF3236-24	2"	2-1/4"	3"	2.0015	2.0025	2.2510	2.2520	2.5000	0.1250	2.980	3.000	17,894	8,947	3.75	2.2520	2.2530	2.2490	2.2500
PSF4044-24	2-1/2"	2-3/4"	3"	2.5015	2.5025	2.7510	2.7520	3.0000	0.1250	2.980	3.000	22,364	11,182	4.60	2.7520	2.7530	2.7490	2.7500
PSF4852-28	3"	3-1/4"	3-1/2"	3.0015	3.0025	3.2510	3.2520	3.5000	0.1250	3.480	3.500	31,336	15,668	6.30	3.2520	3.2530	3.2485	3.2495

ORDERING INFORMATION

PSF	12	16	08
Type	I.D.	O.D.	Length
PSF: Precision Sleeve Bearing with Flange	I.D. in 1/16" Increments	O.D. in 1/16" Increments	Length in 1/8" Increments

Note: Lengths not listed above must be specially quoted.

Additional sizes are available within our online configurator.

Configure
Online



Only certified Simplicity 60 Plus
Shafting provides maximum linear
bearing performance.

Inch Series—page 52 Metric Series—page 94



INSTALLATION INSTRUCTIONS

1. Slip the bearing sleeve into the housing and epoxy into place with Loctite® or similar type bonding agent.




Do NOT let any of the adhesive touch the bearing liner. It will harden and interfere with the running clearance.

2. Freeze the bearings at 0°F (-17.75°C) for 30-45 minutes. Using gloves, remove the bearings from the freezer and slip them into the housing. As they heat to room temperature, full contact between the bearing and housing will be achieved. The greatest advantage to this technique over traditional pressing is greater accuracy in alignment.

Simplicity® Die Set Bushings


Die Set Bushings PAC

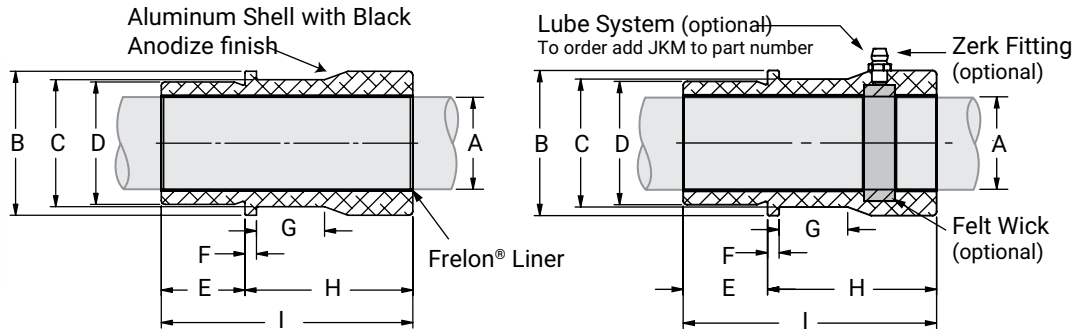

DIMENSIONAL INFORMATION


P = Precision C = Compensated	Part No.	Nominal Size in.	A Bearing I.D.		B Flange & Barrel O.D.		C Clamp Dia.	D Pilot O.D.		E Pilot Length	F Flange Length	G Recess Length	H Head Length	I Overall Length	Effective Surface Area sq. in.	MAX Static Load lb.		Bearing Weight lb.
			MIN	MAX	MIN	MAX	MIN	MIN	MAX							Frelon® GOLD	J & W	
P	PACZ750	3/4	0.750	0.7510	1.285	1.300	1.012	1.1245	1.1250	0.812	0.188	0.712	2.000	2.812	2.209	6,626	3,313	0.625
C	PACZ750C		0.753	0.7540														
P	PACZ100	1	1.000	1.0010	1.723	1.738	1.450	1.4995	1.5000	0.875	0.188	0.812	2.250	3.125	3.272	9,817	4,909	1.000
C	PACZ100C		1.003	1.0040														
P	PACZ125	1-1/4	1.250	1.2510	2.097	2.112	1.825	1.7495	1.7500	1.125	0.188	0.812	2.375	3.500	4.581	13,744	6,872	1.500
C	PACZ125C		1.254	1.2550														
P	PACZ150	1-1/2	1.500	1.5012	2.346	2.361	2.075	1.9995	2.0000	1.375	0.188	1.112	2.750	4.125	6.480	19,439	9,719	2.000
C	PACZ150C		1.504	1.5050														
P	PACZ200	2	2.000	2.0014	3.095	3.110	2.825	2.4995	2.5000	1.625	0.188	1.112	3.000	4.625	9.687	29,060	14,530	4.188
C	PACZ200C		2.005	2.0064														
P	PACZ250	2-1/2	2.500	2.5016	3.595	3.610	3.325	2.9995	3.0000	1.875	0.188	1.112	3.500	5.375	14.072	42,215	21,108	6.000
C	PACZ250C		2.505	2.5065														
P	PACZ300	3	3.000	3.0020	4.345	4.360	4.075	3.6245	3.6250	1.875	0.188	1.112	4.000	5.875	18.457	55,371	27,685	10.000
C	PACZ300C		3.006	3.0080														

- Notes:** (1) Formula used for effective surface area is $(\pi * ID * L)/3$.
 (2) Shell material is aluminum.
 (3) For lubrication system add JKM, example: PACZ750JKM.
 (4) Max static load is effective surface area times max load for FrelonGOLD®.
 (5) – 3000 psi is the rating for FrelonGOLD®: 1500 psi is the rating for Frelon J & W.

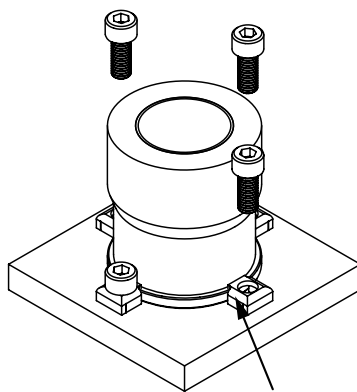

4 PAC clamps are shipped with each die set.

Extra clamps can be ordered using part # PACCLAMP.

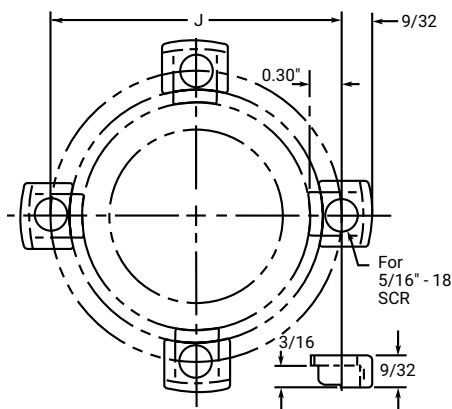

Dimension for calculating bolt circle: $J = C + 0.60"$

Plain Bearings Accessories

Retaining Rings (External)

FL Series	Part No.
FL03	6010001
FL04	6010002
FL06	6010003
FL08	6010004
FL10	6010005
FL12	6010006
FL16	6010007
FL20	6010008
FL24	6010009
FL32	6010010
FL40	6010011
FL48	6010012
FL64	6010013
FM Series	Part No.
FM05	6010014
FM08	6010015
FM10	6010016
FM12	6010017
FM16	6010018
FM20	6010019
FM25	6010020
FM30	6010021
FM40	6010022
FM50	6010023
FM60	6010024
FM80	6010025

Seals

FL Series	Part No.		
	Polymod	Viton	Urethane
FL08	6030001	6030009	6030017
FL10	6030002	6030010	6030018
FL12	6030003	6030011	6030019
FL16	6030004	6030012	6030020
FL20	6030005	6030013	6030021
FL24	6030006	6030014	6030022
FL32	6030007	6030015	6030023
FL40	6030008	6030016	6030024
FL48	N/A	N/A	6030025
FL64	N/A	N/A	6030026
FM/FJ Series	Part No.		
FM20/FJ20	N/A	N/A	6030027
FM25/FJ25	N/A	N/A	6030028
FM30/FJ30	N/A	N/A	6030029
FJ35	N/A	N/A	6030030
FJ38	N/A	N/A	6030030
FM40/FJ40	N/A	N/A	6030031
FM50/FJ50	N/A	N/A	6030032
FM60/FJ60	N/A	N/A	6030033
FM80/FJ80	N/A	N/A	6030034
FJ100	N/A	N/A	6030052
FJ120	N/A	N/A	6030053

O-Rings

FL Series	Part No.	
	Nitrile buna 70	Viton
FL04	6000001	N/A
FL06	6000002	6000037
FL08	6000003	6000038
FL10	6000004	6000039
FL12	6000005	6000040
FL16	6000006	6000041
FL20	6000007	6000042
FL24	6000008	6000043
FL32	6000009	6000044
FL40	6000010	6000045
FL48	6000011	6000046
FL64	6000012	6000047
FM/FJ Series	Part No.	
FM08	6000014	N/A
FM10	6000015	N/A
FM12	6000016	N/A
FM16	6000017	N/A
FM20	6000018	N/A
FM25	6000019	N/A
FM30	6000020	N/A
FM40	6000021	N/A
FM50	6000022	N/A
FM60	6000023	N/A
FM80	6000024	N/A

Retaining Rings (Internal)

*Inch Open	Part No.		*Metric Open	Part No.	
	Steel	Stainless Steel		Steel	*Stainless Steel
PN08	6010035	6010064	PMN12	6010044	N/A
PN10	6010036	6010066	PMN16	6010045	6010107
PN12	6010037	6010068	PMN20	6010046	N/A
PN16	6010038	6010070	PMN25	6010047	N/A
PN20	6010039	6010072	PMN30	6010048	6010083
PN24	6010040	6010074	PMN40	6010049	N/A
PN32	6010041	6010076	PMN50	6010050	N/A
Closed	Part No.		Closed	Part No.	
P04	6010026	6010052	PM08	6010042	N/A
P06	6010027	6010053	PM10	6010043	N/A
P08	6010028	6010054	PM12	6010044	N/A
P10	6010029	6010055	PM16	6010045	6010107
P12	6010030	6010056	PM20	6010046	N/A
P16	6010031	6010057	PM25	6010047	N/A
P20	6010032	6010058	PM30	6010048	6010083
P24	6010033	6010059	PM40	6010049	N/A
P32	6010034	6010060	PM50	6010050	N/A

Zerk Fittings

Inch	Part No.
1/4-28" Steel	6050002
1/4-28" Stainless	6050003
Metric	Part No.
M8 x 1.0 Steel	6050001

Roll Pin

Inch Open	Part No.
PN08	6060001
PN10	6060002
PN12	6060003
PN16	6060004
PN20	6060005
PN24	6060006
PN32	6060007
Metric Open	Part No.
PMN12	6060010
PMN16	6060009
PMN20	6060009
PMN25	6060010
PMN30	6060010
PMN40	6060012
PMN50	6060012


* Purchased retaining ring components (an accessory item listed above) are the custom's responsibility to trim/cut tabbed ends. When purchased as part of a PBC Linear complete pre-assembled open pillow block assembly, tabbed ends will be trimmed/cut at factory prior to shipment.

Ball Bearings Overview

Product Overview

High Precision and Rigidity

The ball bearing is produced from a solid steel outer cylinder and incorporates an industrial strength polymer retainer.

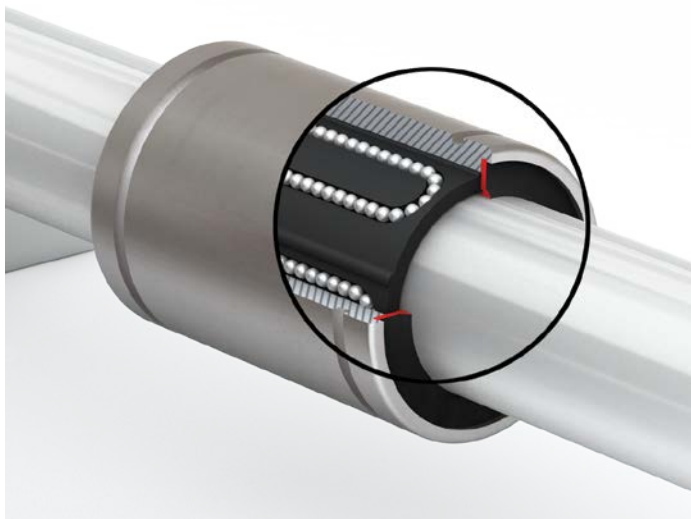

Ease of Assembly

The standard type of linear ball bearing can be loaded from any direction. Precision control is possible using only the shaft supporter, and the mounting surface can be machined easily.

Ease of Replacement

Linear ball bearings of each type are completely interchangeable because of their standardized dimensions and strict precision control. Replacement because of wear or damage is therefore easy and accurate.

Materials

Ball bearings consist of an outer cylinder, ball retainer, balls, double seals, and two end rings. The ball retainer which holds the balls in the recirculating tracks is held inside the outer cylinder by end rings.

- Parts are assembled to optimize their required functions
- The outer shell is heat treated to ensure long life
- The ball retainer is molded from a durable polymer to ensure smooth and quiet motion
- Double seals are standard for all ball bearings. Seals can be easily removed for applications requiring one or no seals.

Variety of Types

PBC Linear offers a full line of ball bearings that include:

- Inch, ISO Metric, and JIS Metric sizes
- Self-aligning super ball bearings in Inch sizes
- Double wide in Inch, ISO Metric, and JIS Metric sizes
- Square and round flange in ISO Metric and JIS Metric sizes
- Double wide square and round flange in ISO Metric and JIS Metric sizes
- Double wide with center flange location in ISO Metric and JIS Metric sizes
- Pillow blocks, open and closed, in Inch and ISO Metric
- Double wide pillow blocks in Inch sizes



Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Ball Bearings Overview

Linear Ball Bearings

Available in a variety of configurations designed to meet a range of application needs.

Bearings – IP, EP, and JP Series (Inch, ISO, and JIS Metric)

- Solid steel outer shell

Pillow Blocks – IPP and EPP (Inch and ISO Metric)

- Aluminum housing with bearing insert
- Industrial strength polymer ball retainer
- End rings with integrated seals standard
- Used in standard PBC Linear pillow blocks that supply 1/2° self-alignment in all directions
- Excellent rigidity while providing smooth, quiet operation

IPS and EPS Series

- Outer shell is of high strength polymer
- Ball bearing raceway inserts are hardened steel
- Inserts allow smooth ball rotation while maintaining even preload with the shaft or inner race
- Inserts provide 1/2° self-alignment in all directions when used in a straight bore pillow block or housing
- Provide increased load capacity and life in a lightweight design

Flanged Bearings – EP, and JP Series (ISO, and JIS Metric)


- Solid steel outer shell
- Industrial strength polymer ball retainer
- End rings with integrated seals standard
- Excellent rigidity while providing smooth, quiet operation

Self-Aligning Pillow Blocks


Pillow blocks combine linear ball bearings with a PBC Linear self aligning pillow block to compensate for misalignment or shaft deflection in the application

- Straight OD bearings are used in standard PBC Linear pillow blocks that supply 1/2° self-alignment in all directions
- Straight bore pillow blocks are also available for applications which demand more rigidity
- PBC Linear bearings are size interchangeable with industry standard ball bearings and with Simplicity plain bearings



IP, EP, JP Series

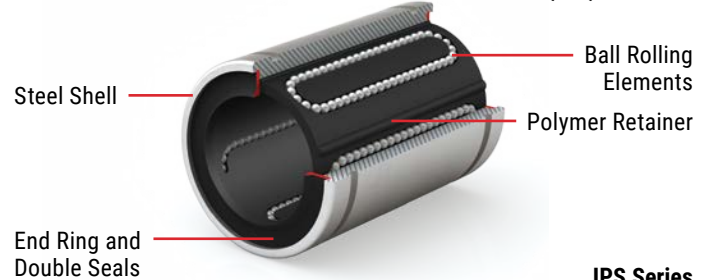

IPS Series

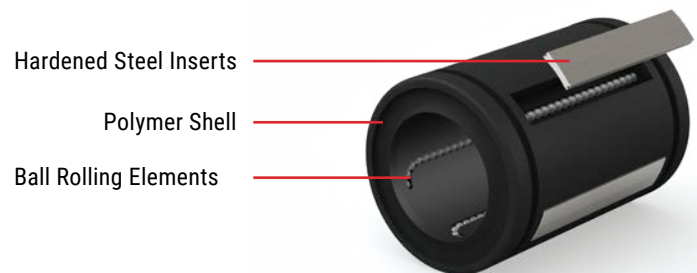

IP, EP, JP Flanged Series

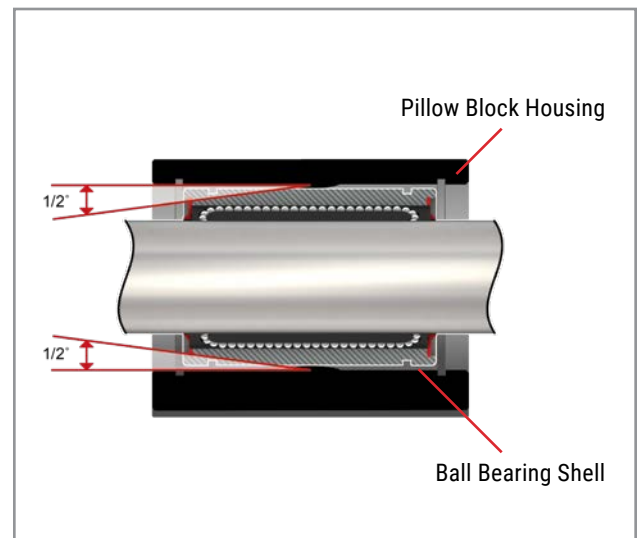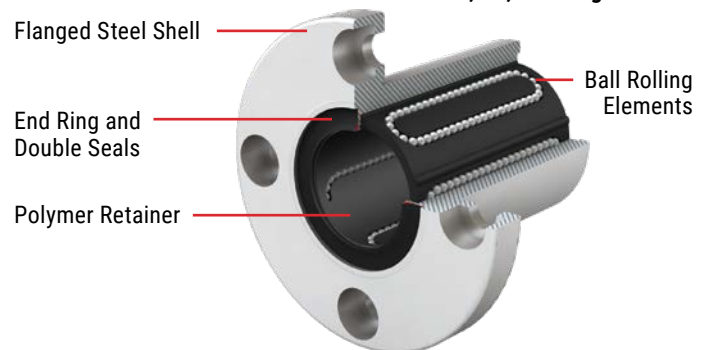


Ordering Information Linear Ball Bearings



Configure
Online


Ball Bearings

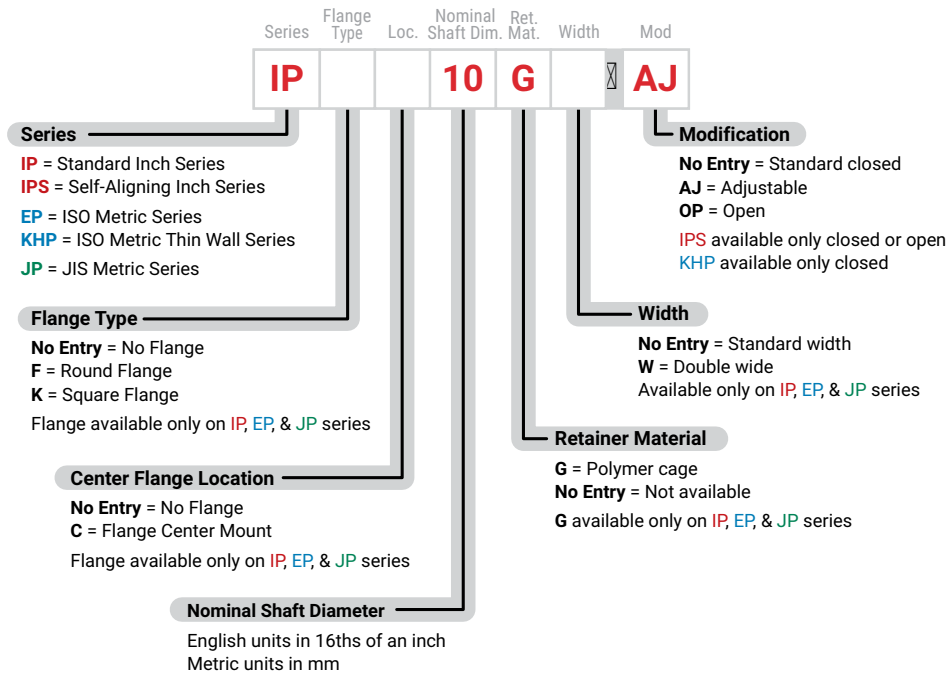

Note: Precision of inscribed circle diameters and outside diameters for the clearance adjustable type (...-AJ) and the open type (...-OP) indicates the value obtained before the corresponding type is subjected to cutting process.


Double Seals are standard for all ball bearings. Seals can be easily removed for applications requiring one or no seals.

Ball Bearing Pillow Blocks

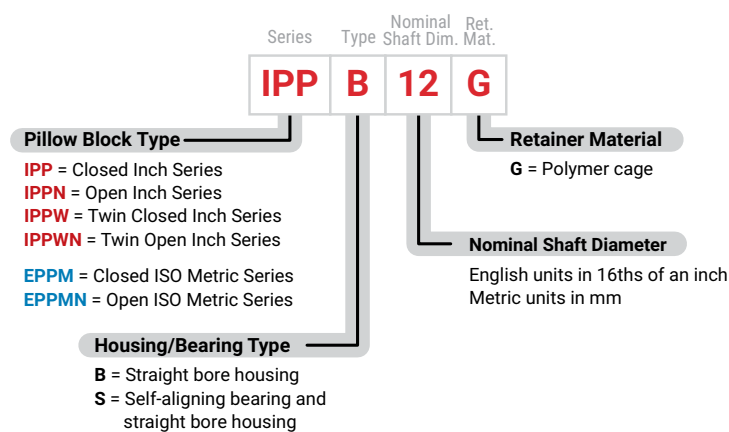

Linear Ball Bearings Precision Plus Self Aligning

Precision Plus Self Aligning Ball bearings IPS & IPSXX-OP

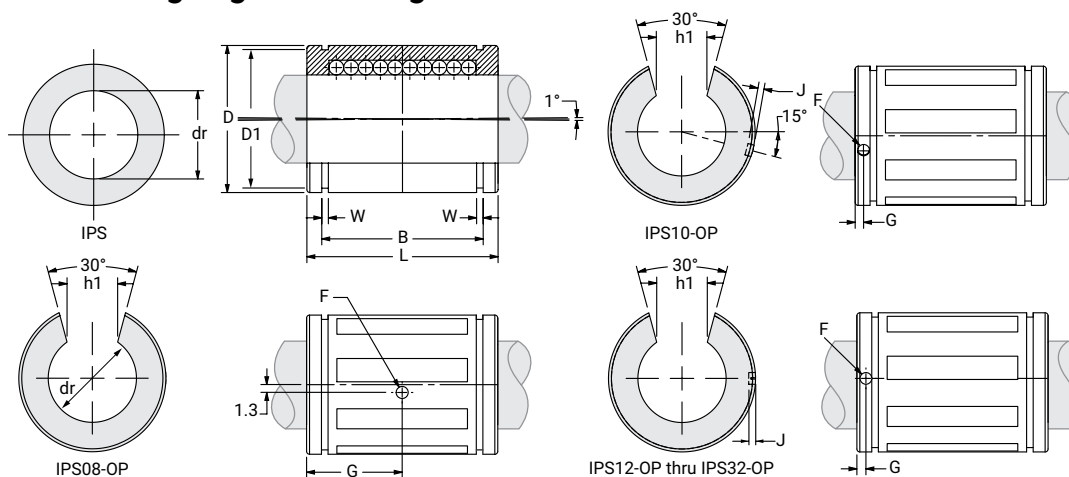

IPS – Self Aligning Closed

IPSxx-OP – Self Aligning Open



DIMENSIONAL INFORMATION


Part No. Self Aligning Closed	Nominal Diameter			Ball Circuit	Weight lb.	Major Dimensions & Tolerances							Load Ratings	
	Size in.	dr in.	Tolerance in.			D in.	L in.	Tolerance in.	B in.	Tolerance in.	W in.	D1 in.	Dynamic C lb.	Static Co lb.
IPS04	1/4	0.2500	0/-0.0005	4	0.009	0.5000	0.7500	0/-0.015	0.515	0/-0.015	0.0390	0.4687	57	49
IPS06	3/8	0.3750	0/-0.0005	4	0.014	0.6250	0.8750	0/-0.015	0.703	0/-0.015	0.0390	0.5880	78	66
IPS08	1/2	0.5000	0/-0.0005	4	0.043	0.8750	1.2500	0/-0.020	1.032	0/-0.020	0.0459	0.8209	190	190
IPS10	5/8	0.6250	0/-0.0005	5	0.103	1.1250	1.5000	0/-0.020	1.112	0/-0.020	0.0559	1.0590	290	340
IPS12	3/4	0.7500	0/-0.0005	6	0.123	1.2500	1.6250	0/-0.020	1.272	0/-0.020	0.0559	1.1760	470	430
IPS16	1	1.0000	0/-0.0005	6	0.265	1.5625	2.2500	0/-0.020	1.886	0/-0.020	0.0679	1.4687	820	780
IPS20	1-1/4	1.2500	0/-0.0006	6	0.485	2.0000	2.6250	0/-0.025	2.011	0/-0.025	0.0679	1.8859	1,230	1,270
IPS24	1-1/2	1.5000	0/-0.0006	6	0.750	2.3750	3.0000	0/-0.030	2.422	0/-0.030	0.0859	2.2389	1,479	1,540
IPS32	2	2.0000	0/-0.0008	6	1.411	3.0000	4.0000	0/-0.040	3.206	0/-0.040	0.1029	2.8379	2,230	2,580

DIMENSIONAL INFORMATION

Part No. Self Aligning Open	Nominal Diameter			Ball Circuit	Weight lb.	Major Dimensions & Tolerances											Load Ratings	
	Size in.	dr in.	Tolerance in.			D in.	L in.	Tolerance in.	B in.	Tolerance in.	W in.	D1 in.	h1 in.	F in.	G in.	J in.	Dynamic C lb.	Static Co lb.
IPS08-OP	1/2	0.5000	0/-0.0005	3	0.033	0.8750	1.2500	0/-0.020	1.032	0/-0.020	0.0459	0.8209	0.313	0.136	0.6250	through	210	159
IPS10-OP	5/8	0.6250	0/-0.0005	4	0.083	1.1250	1.5000	0/-0.020	1.112	0/-0.020	0.0559	1.0590	0.375	0.105	0.1250	0.039	320	340
IPS12-OP	3/4	0.7500	0/-0.0005	5	0.102	1.2500	1.6250	0/-0.020	1.272	0/-0.020	0.0559	1.1760	0.438	0.136	0.1250	0.059	470	430
IPS16-OP	1	1.0000	0/-0.0005	5	0.220	1.5625	2.2500	0/-0.020	1.886	0/-0.020	0.0679	1.4687	0.563	0.136	0.1250	0.047	830	780
IPS20-OP	1-1/4	1.2500	0/-0.0006	5	0.419	2.0000	2.6250	0/-0.025	2.011	0/-0.025	0.0679	1.8859	0.625	0.201	0.1875	0.090	1,230	1,270
IPS24-OP	1-1/2	1.5000	0/-0.0006	5	0.639	2.3750	3.0000	0/-0.030	2.422	0/-0.030	0.0859	2.2389	0.750	0.201	0.1875	0.090	1,479	1,540
IPS32-OP	2	2.0000	0/-0.0008	5	1.168	3.0000	4.0000	0/-0.040	3.206	0/-0.040	0.1029	2.8379	1.000	0.265	0.3125	through	2,250	2,580

Linear Ball Bearings Precision

Ball Bearings IP

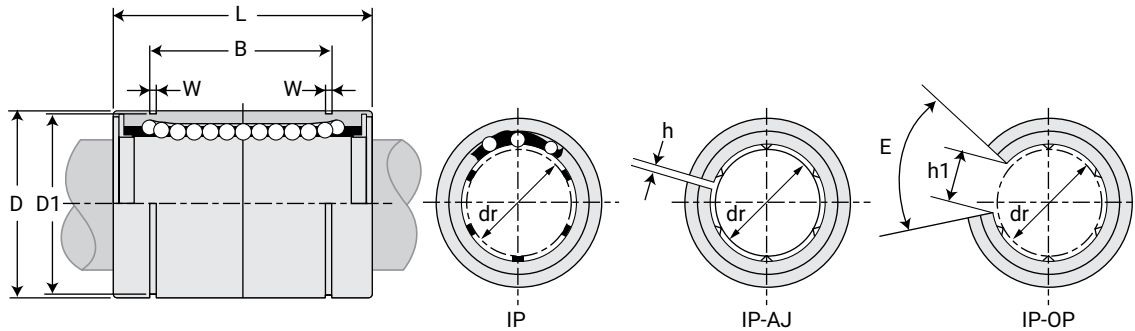

IP – Standard Closed

IPxx-AJ – Adjustable

IPxx-OP – Standard Open



DIMENSIONAL INFORMATION

(Standard Steel Finish)

Part No.			Nominal Diameter			Ball Circuit	Weight G	Major Dimensions & Tolerances					
Standard Closed	Adjustable	Standard Open	Size in.	Dr in.	Tolerance in.			D in.	Tolerance in.	L in.	Tolerance in.	B in.	Tolerance in.
IP04G	-	-	1/4	0.2500	0/-0.0005	4	8	0.5000	0/-0.00045	0.7500	0/-0.008	0.5110	0/-0.008
IP06G	-	-	3/8	0.3750	0/-0.0005	4	15	0.6250	0/-0.00050	0.8750	0/-0.008	0.6358	0/-0.008
IP08G	IP8G-AJ	IP8G-OP	1/2	0.5000	0/-0.0005	4	42	0.8750	0/-0.00050	1.2500	0/-0.008	0.9625	0/-0.008
IP10G	IP10G-AJ	IP10G-OP	5/8	0.6250	0/-0.0005	5	85	1.1250	0/-0.00050	1.5000	0/-0.008	1.1039	0/-0.008
IP12G	IP12G-AJ	IP12G-OP	3/4	0.7500	0/-0.0005	5	104	1.2500	0/-0.00065	1.6250	0/-0.008	1.1657	0/-0.008
IP16G	IP16G-AJ	IP16G-OP	1	1.0000	0/-0.0005	6	220	1.5625	0/-0.00065	2.2500	0/-0.012	1.7547	0/-0.012
IP20G	IP20G-AJ	IP20G-OP	1-1/4	1.2500	0/-0.0006	6	465	2.0000	0/-0.00075	2.6250	0/-0.012	2.0047	0/-0.012
IP24G	IP24G-AJ	IP24G-OP	1-1/2	1.5000	0/-0.0006	6	720	2.3750	0/-0.00075	3.0000	0/-0.012	2.4118	0/-0.012
IP32G	IP32G-AJ	IP32G-OP	2	2.0000	0/-0.0008	6	1310	3.0000	0/-0.00090	4.0000	0/-0.012	3.1917	0/-0.012

Part No.			Nominal Diameter			Major Dimensions & Tolerances							Load Ratings	
Standard Closed	Adjustable	Standard Open	Size in.	dr in.	Tolerance in.	W in.	D1 in.	H in.	h1 in.	E Slot Angle	Max Eccentricity in.	Max Radial Clearance in.	Dynamic C lb.	Static Co lb.
IP04G	-	-	1/4	0.2500	0/-0.0005	0.0390	0.4687	-	-	-	0.0004	-0.0001	46	59
IP06G	-	-	3/8	0.3750	0/-0.0005	0.0390	0.5880	-	-	-	0.0004	-0.0001	50	70
IP08G	IP8G-AJ	IP8G-OP	1/2	0.5000	0/-0.0005	0.0459	0.8209	0.06	0.3400	80°	0.0004	-0.0001	114	176
IP10G	IP10G-AJ	IP10G-OP	5/8	0.6250	0/-0.0005	0.0559	1.0590	0.06	0.3750	80°	0.0004	-0.0001	174	265
IP12G	IP12G-AJ	IP12G-OP	3/4	0.7500	0/-0.0005	0.0559	1.1760	0.06	0.4375	60°	0.0005	-0.0002	193	307
IP16G	IP16G-AJ	IP16G-OP	1	1.0000	0/-0.0005	0.0679	1.4687	0.06	0.5625	50°	0.0005	-0.0002	220	352
IP20G	IP20G-AJ	IP20G-OP	1-1/4	1.2500	0/-0.0006	0.0679	1.8859	0.10	0.6250	50°	0.0007	-0.0003	352	615
IP24G	IP24G-AJ	IP24G-OP	1-1/2	1.5000	0/-0.0006	0.0859	2.2389	0.12	0.7500	50°	0.0007	-0.0003	490	903
IP32G	IP32G-AJ	IP32G-OP	2	2.0000	0/-0.0008	0.1029	2.8379	0.12	1.000	50°	0.0009	-0.0005	858	1,784




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Linear Ball Bearings Double Wide

Double Wide Ball Bearings IP-W

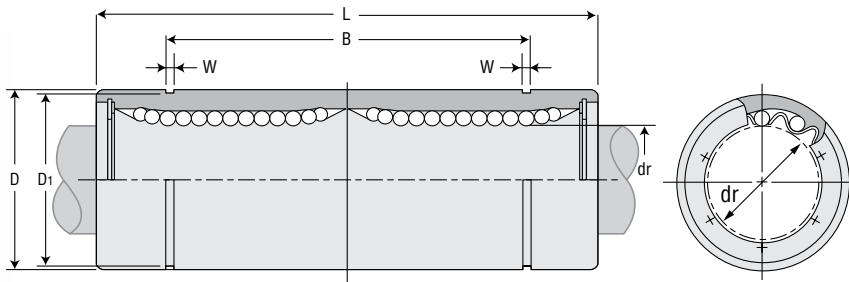

DIMENSIONAL INFORMATION

(Standard Steel Finish)

Part No.	Nominal Diameter			Ball Circuit	Weight G	Major Dimensions & Tolerances					
	Size in.	dr in.	Tolerance in.			D in.	Tolerance in.	L in.	Tolerance in.	B in.	Tolerance in.
Standard Closed											
IP04GW	1/4	0.250	0/-0.0004	4	18	0.5000	0/-0.00050	1.3750	0/-0.012	1.0220	0/-0.012
IP06GW	3/8	0.375	0/-0.0004	4	28	0.6250	0/-0.00065	1.5938	0/-0.012	1.2716	0/-0.012
IP08GW	1/2	0.500	0/-0.0004	4	80	0.8750	0/-0.00065	2.3750	0/-0.012	1.9250	0/-0.012
IP10GW	5/8	0.625	0/-0.0004	4	160	1.1250	0/-0.00065	2.8125	0/-0.012	2.2079	0/-0.012
IP12GW	3/4	0.750	0/-0.0005	5	195	1.2500	0/-0.00075	3.0937	0/-0.012	2.3314	0/-0.012
IP16GW	1	1.000	0/-0.0005	6	410	1.5625	0/-0.00075	4.2813	0/-0.016	3.5094	0/-0.16
IP20GW	1-1/4	1.250	0/-0.0006	6	820	2.0000	0/-0.00090	5.0000	0/-0.016	4.0094	0/-0.16
IP24GW	1-1/2	1.500	0/-0.0006	6	1,250	2.3750	0/-0.00090	5.6875	0/-0.016	4.8236	0/-0.16
IP32GW	2	2.000	0/-0.0006	6	2,350	3.0000	0/-0.00100	7.7500	0/-0.016	6.3834	0/-0.16

Part No.	Nominal Diameter			Major Dimensions & Tolerances			Load Ratings	
	Size in.	dr in.	Tolerance in.	W in.	D1 in.	MAX Eccentricity in.	Dynamic C lb.	Static Co lb.
Standard Closed								
IP04GW	1/4	0.250	0/-0.0004	0.0390	0.4687	0.0006	72	119
IP06GW	3/8	0.375	0/-0.0004	0.0390	0.5880	0.0006	79	142
IP08GW	1/2	0.500	0/-0.0004	0.0459	0.8209	0.0005	182	352
IP10GW	5/8	0.625	0/-0.0004	0.0559	1.0590	0.0005	276	528
IP12GW	3/4	0.750	0/-0.0005	0.0559	1.1760	0.0007	307	615
IP16GW	1	1.000	0/-0.0005	0.0679	1.4687	0.0007	352	705
IP20GW	1-1/4	1.250	0/-0.0006	0.0679	1.8859	0.0009	562	1,234
IP24GW	1-1/2	1.500	0/-0.0006	0.0859	2.2389	0.0009	771	1,807
IP32GW	2	2.000	0/-0.0006	0.1029	2.8379	0.0011	1,366	3,574




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Linear Ball Bearings Precision Plus Pillow Blocks with Lubrication Ports

Closed Pillow Blocks IPPS

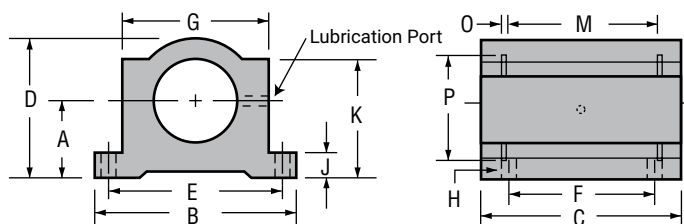


DIMENSIONAL INFORMATION

	Nom. Brg. I.D.	A Centerline	B	C	D	E	F	G Body	H		J Flange	K	M GRV.	O GRV.	P GRV.	Assem. WT.	Load Ratings	
Part No.	in.	+/- 0.001	Width	Length	Height	+/- 0.010	+/-0.010	Width	Bolt	Hole	Thick		Space	Width	Dia.	lb	Dynamic C lb	Static Co lb
IPPS08G	1/2	0.687	2.000	1.69	1.250	1.688	1.000	1.375	#6	5/32"	0.250	1.125	1.250	0.046	0.931	0.200	230	159
IPPS10G	5/8	0.875	2.500	1.94	1.625	2.125	1.125	1.750	#8	3/16"	0.281	1.438	1.500	0.056	1.197	0.500	400	264
IPPS12G	3/4	0.937	2.750	2.06	1.750	2.375	1.250	1.875	#8	3/16"	0.313	1.563	1.625	0.056	1.330	0.600	470	372
IPPS16G	1	1.187	3.250	2.81	2.188	2.875	1.750	2.375	#10	7/32"	0.375	1.938	2.250	0.068	1.671	1.200	850	667
IPPS20G	1-1/4	1.500	4.000	3.63	2.813	3.500	2.000	3.000	#10	7/32"	0.438	2.500	2.625	0.068	2.122	2.500	1,230	992
IPPS24G	1-1/2	1.750	4.750	4.00	3.250	4.125	2.500	3.500	1/4"	9/32"	0.500	2.875	3.000	0.086	2.519	3.800	1,480	1,258
IPPS32G	2	2.125	6.000	5.00	4.063	5.250	3.250	4.500	3/8"	13/32"	0.625	3.625	4.000	0.103	3.182		2,430	2,165

Notes: (1) All IPPS series pillow blocks use IPS series self-aligning bearings.
(2) Includes grease zerk fittings for relubrication.

Open Pillow Blocks IPPSN

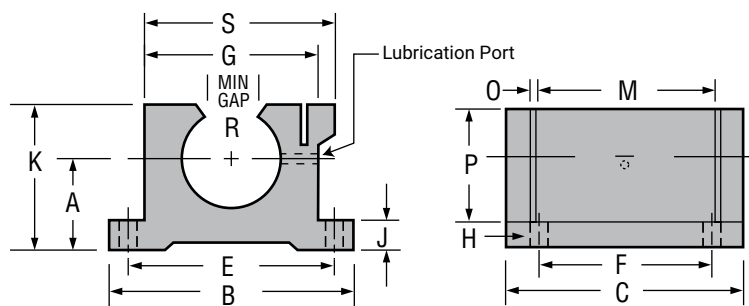



DIMENSIONAL INFORMATION

Part No.	Nom. Brg. I.D.	A Centerline	B Width	C Length	D Height	E	F	G Body	H Bolt	J Flange	K	M GRV.	O GRV.	P GRV.	R Min	S Overall Width	Assem. WT.	Load Ratings	
	in.	+/- 0.001				+/- 0.010	+/- 0.010			Thick	Height	Space	Width	Dia.	Open		lb	Dynamic C lb	Static Co lb
IPPSN08G	1/2	0.687	2.000	1.50	1.688	1.000	1.375	#6	5/32"	0.250	1.125	1.250	0.046	0.931	0.313	1.438	0.200	230	159
IPPSN10G	5/8	0.875	2.500	1.75	2.125	1.125	1.750	#8	3/16"	0.281	1.438	1.500	0.056	1.197	0.375	1.813	0.400	400	264
IPPSN12G	3/4	0.937	2.750	1.88	2.375	1.250	1.875	#8	3/16"	0.313	1.563	1.625	0.056	1.330	0.438	1.938	0.500	470	372
IPPSN16G	1	1.187	3.250	2.63	2.875	1.750	2.375	#10	7/32"	0.375	1.938	2.250	0.068	1.671	0.563	2.438	1.000	850	667
IPPSN20G	1-1/4	1.500	4.000	3.38	3.500	2.000	3.000	#10	7/32"	0.438	2.500	2.625	0.068	2.122	0.625	3.125	2.100	1,230	992
IPPSN24G	1-1/2	1.750	4.750	3.75	4.125	2.500	3.500	1/4"	9/32"	0.500	2.875	3.000	0.086	2.519	0.750	3.625	3.200	1,480	1,258
IPPSN32G	2	2.125	6.000	4.75	5.250	3.250	43.500	3/8"	13/32"	0.625	3.625	4.000	0.103	3.182	1.000	4.688		2,430	2,165

Notes: (1) All IPPS series pillow blocks use IPS series self-aligning bearings.
(2) Includes grease zerk fittings for relubrication.

Linear Ball Bearings Precision Plus Twin Pillow Blocks with Lubrication Ports

Closed Twin Pillow Blocks **IPPSW**

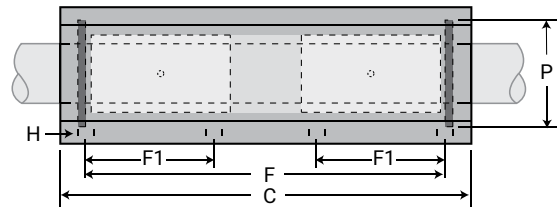
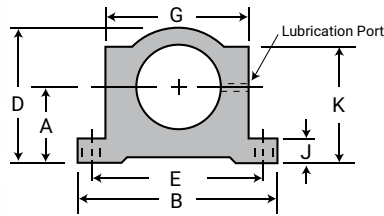


DIMENSIONAL INFORMATION

Part No.	Nom. Brg. I.D. in.	A Centerline +/- 0.001	B Width	C Length	D Height	E +/- 0.010	F +/- 0.010	F1 +/- 0.010	G Body Width	H Bolt Hole	J Flange Thick	K	P GRV. Dia.	Assem. WT. lb	Load Ratings Dynamic C lb	Static Co lb
IPPSW08G	1/2	0.687	2.000	3.500	1.250	1.688	2.500	1.000	1.375	#6 5/32"	0.250	1.125	0.931	0.50	460	318
IPPSW10G	5/8	0.875	2.500	4.000	1.625	2.125	3.000	1.125	1.750	#8 3/16"	0.281	1.438	1.197	1.00	800	528
IPPSW12G	3/4	0.937	2.750	4.500	1.750	2.375	3.500	1.250	1.875	#8 3/16"	0.313	1.563	1.330	1.20	940	744
IPPSW16G	1	1.187	3.250	6.000	2.188	2.875	4.500	1.750	2.375	#10 7/32"	0.375	1.938	1.671	2.20	1,700	1,334
IPPSW20G	1-1/4	1.500	4.000	7.500	2.813	3.500	5.500	2.000	3.000	#10 7/32"	0.438	2.500	2.122	4.50	2,460	1,984
IPPSW24G	1-1/2	1.750	4.750	9.000	3.250	4.125	6.500	2.500	3.500	1/4" 9/32"	0.500	2.875	2.519	6.30	2,960	2,516
IPPSW32G	2	2.125	6.000	10.000	4.063	5.250	8.250	3.250	4.500	3/8" 13/32"	0.625	3.182	2.519?		4,860	4,330

Notes: (1) All IPPS series pillow blocks use IPS series self-aligning bearings.
(2) Includes grease zerk fittings for relubrication.

Open Twin Pillow Blocks **IPPSWN**

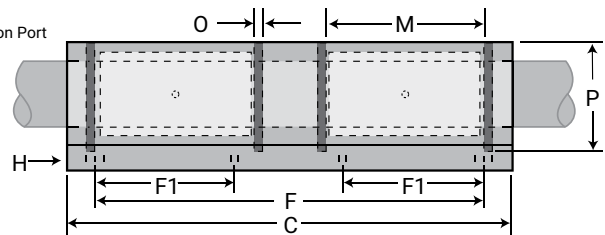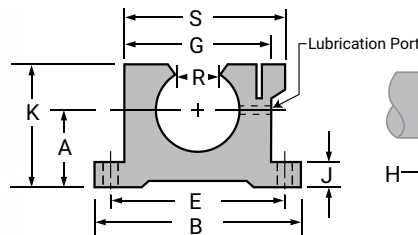




DIMENSIONAL INFORMATION

Part No.	Nom. Brg. I.D. in.	A Centerline +/- 0.001	B Width	C Length	E +/- 0.010	F +/- 0.010	F1 +/- 0.010	G Body Width	H Bolt Hole	J Flange Thick	K Height	M GRV. Space	O GRV. Width	P GRV. Dia.	R MIN Open	S Overall Width	Assem. WT. lb	Load Ratings Dynamic C lb	Static Co lb
IPPSWN08G	1/2	0.687	2.000	3.500	1.688	2.500	1.000	1.375	#6 5/32"	0.250	1.125	1.250	0.046	0.931	0.313	1.438	0.40	460	318
IPPSWN10G	5/8	0.875	2.500	4.000	2.125	3.000	1.125	1.750	#8 3/16"	0.281	1.438	1.500	0.056	1.197	0.375	1.813	0.80	800	528
IPPSWN12G	3/4	0.937	2.750	4.500	2.375	3.500	1.250	1.875	#8 3/16"	0.313	1.563	1.625	0.056	1.330	0.438	1.938	1.00	940	744
IPPSWN16G	1	1.187	3.250	6.000	2.875	4.500	1.750	2.375	#10 7/32"	0.375	1.938	2.250	0.068	1.671	0.563	2.438	2.00	1,700	1,334
IPPSWN20G	1-1/4	1.500	4.000	7.500	3.500	5.500	2.000	3.000	#10 7/32"	0.438	2.500	2.625	0.068	2.122	0.625	3.125	4.00	2,460	1,984
IPPSWN24G	1-1/2	1.750	4.750	9.000	4.125	6.500	2.500	3.500	1/4" 9/32"	0.500	2.875	3.000	0.086	2.519	0.750	3.625	6.00	2,960	2,516
IPPSWN32G	2	2.125	6.000	10.000	5.250	8.250	3.250	4.500	3/8" 13/32"	0.625	3.625	4.000	0.103	3.182	1.000	4.688		4,860	4,330

Notes: (1) All IPPS series pillow blocks use IPS series self-aligning bearings.
(2) Includes grease zerk fittings for relubrication.

Linear Ball Bearings Precision Pillow Blocks




Ball Bearings – Closed Pillow Blocks IPP

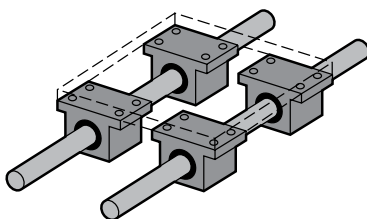

Part No.	Nom. Brg. Dia.	A	B	C	D	E	F	G	H		J	K	M	O	P	Smalley Ret. Ring Part No.	Assem. WT. lb.	Load Ratings lb	
		Centerline +/- 0.001	Width	Length	Height	+/- 0.010	+/- 0.010	Body Width	Bolt	Hole	Fling. Thick	Height	GRV. Space	GRV. Width	Grv. Dia.			Dynamic C	Static Co
Precision	in.																		
IPP04G	1/4	0.437	1.625	1.19	0.813	1.312	0.750	1.000	#6	5/32"	0.188	0.750	0.750	0.039	0.532	WH-51	0.099	46	59
IPP06G	3/8	0.500	1.750	1.31	0.938	1.437	0.875	1.125	#6	5/32"	0.188	0.875	0.875	0.039	0.665	WH-65	0.129	50	70
IPP08G	1/2	0.687	2.000	1.69	1.250	1.688	1.000	1.375	#6	5/32"	0.250	1.125	1.250	0.046	0.931	WH-90	0.250	114	176
IPP10G	5/8	0.875	2.500	1.94	1.625	2.125	1.125	1.750	#8	3/16"	0.281	1.438	1.500	0.056	1.197	WH-115	0.500	174	265
IPP12G	3/4	0.937	2.750	2.06	1.750	2.375	1.250	1.875	#8	3/16"	0.313	1.563	1.625	0.056	1.330	WH-128	0.580	193	307
IPP16G	1	1.187	3.250	2.81	2.188	2.875	1.750	2.375	#10	7/32"	0.375	1.938	2.250	0.068	1.671	WH-156	1.000	220	352
IPP20G	1-1/4	1.500	4.000	3.63	2.813	3.500	2.000	3.000	#10	7/32"	0.438	2.500	2.625	0.068	2.122	WH-200	2.000	352	615
IPP24G	1-1/2	1.750	4.750	4.00	3.250	4.125	2.500	3.500	1/4"	9/32"	0.500	2.875	3.000	0.086	2.519	WH-237	3.000	490	903
IPP32G	2	2.125	6.000	5.00	4.063	5.250	3.250	4.500	3/8"	13/32"	0.625	3.625	4.000	0.103	3.182	WH-300	6.500	858	1,784

Notes: (1) Pre-assembled IPP series pillow blocks include self-aligning housing and IP series precision bearings.
(2) Straight bore, "B" option must be ordered for non-self aligning pillow block assemblies.

Ball Bearings – Open Pillow Blocks IPPN

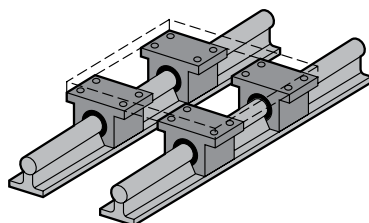

Part No.	Nom. Brg. Dia.	A	B	C	E	F	G	H		J	K	M	O	P	R	S	Eaton Ret. Ring Part No.	Assem. WT.	Load Ratings lb	
Precision	in.	Centerline +/- .001	Width +/- 0.010	Length	+/- 0.010	+/- 0.010	Body Width	Bolt	Hole	Fling Thick	Height	GRV. Space	GRV. Width	GRV. Dia.	MIN. Open	Overall Width		lb.	Dynamic C	Static Co
IPPN08G	1/2	0.687	2.00	1.50	1.688	1.000	1.375	#6	5/32"	0.250	1.125	1.250	0.046	0.931	0.313	1.438	MNAN-87	0.25	114	176
IPPN10G	5/8	0.875	2.50	1.75	2.125	1.125	1.750	#8	3/16"	0.281	1.438	1.500	0.056	1.197	0.375	1.813	MNAN-112	0.50	174	265
IPPN12G	3/4	0.937	2.75	1.88	2.375	1.250	1.875	#8	3/16"	0.313	1.563	1.625	0.056	1.330	0.438	1.938	MNAN-125	0.58	193	307
IPPN16G	1	1.187	3.25	2.63	2.875	1.750	2.375	#10	7/32"	0.375	1.938	2.250	0.068	1.671	0.563	2.438	MNAN-156	1.00	220	352
IPPN20G	1-1/4	1.500	4.00	3.38	3.500	2.000	3.000	#10	7/32"	0.438	2.500	2.625	0.068	2.122	0.625	3.125	MNAN-200	2.00	352	615
IPPN24G	1-1/2	1.750	4.75	3.75	4.125	2.500	3.500	1/4"	9/32"	0.500	2.875	3.000	0.086	2.519	0.750	3.625	MNAN-237	3.00	490	903
IPPN32G	2	2.125	6.00	4.75	5.250	3.250	4.500	3/8"	13/32"	0.625	3.625	4.000	0.103	3.182	1.000	4.688	MNAN-300	6.50	858	1,784

Notes: (1) Pre-assembled IPP series pillow blocks include self-aligning housing and IP series precision bearings.
(2) Straight bore, "B" option must be ordered for non-self aligning pillow block assemblies.





Simplicity Linear Slides: Pre-Assembled Pillow Block, Shaft, and Support Rail—page 110



Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.
Inch Series—page 52 Metric Series—page 94

Linear Ball Bearings Precision Twin Pillow Blocks



Ball Bearings – Twin Closed Pillow Blocks IPPW

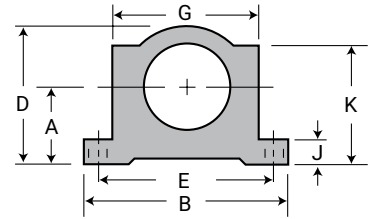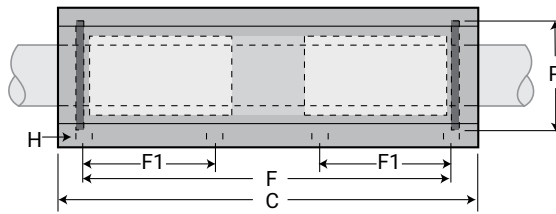

Part No.	Nom. Brg. Dia.	A	B	C	D	E	F	F1	G	H		J	K	P	Smalley Ret. Ring Part No.	Assem. WT.	Load Ratings lb	
										Bolt	Hole						Dynamic C	Static Co
Precision	in.	Centerline +/-0.001	Width	Length	Height	+/-0.010	+/-0.010	+/-0.010	Body Width			Thick	Height	Grv. Dia		lb.		
IPPW04G	1/4	0.437	1.625	2.50	0.813	1.312	2.000	.750	1.000	#6	5/32"	0.188	0.750	0.532	WH-51	0.197	92	118
IPPW06G	3/8	0.500	1.750	2.75	0.938	1.437	2.250	.875	1.125	#6	5/32"	0.188	0.875	0.665	WH-65	0.258	100	140
IPPW08G	1/2	0.687	2.000	3.50	1.250	1.688	2.500	1.000	1.375	#6	5/32"	0.250	1.125	0.931	WH-90	0.500	228	352
IPPW10G	5/8	0.875	2.500	4.00	1.625	2.125	3.000	1.125	1.750	#8	3/16"	0.281	1.438	1.197	WH-115	1.000	348	530
IPPW12G	3/4	0.937	2.750	4.50	1.750	2.375	3.500	1.250	1.875	#8	3/16"	0.313	1.563	1.330	WH-128	1.125	386	614
IPPW16G	1	1.187	3.250	6.00	2.188	2.875	4.500	1.750	2.375	#10	7/32"	0.375	1.938	1.671	WH-156	2.188	440	704
IPPW20G	1-1/4	1.500	4.000	7.50	2.813	3.500	5.500	2.000	3.000	#10	7/32"	0.438	2.500	2.122	WH-200	4.250	704	1,230
IPPW24G	1-1/2	1.750	4.750	9.00	3.250	4.125	6.500	2.500	3.500	1/4"	9/32"	0.500	2.875	2.519	WH-237	6.375	980	1,806
IPPW32G	2	2.125	6.000	10.00	4.063	5.250	8.250	3.250	4.500	3/8"	13/32"	0.625	3.625	3.182	WH-300	13.500	1,716	3,568

Notes: (1) Pre-assembled IPP series pillow blocks include self-aligning housing and IP series precision bearings.
(2) Straight bore, "B" option must be ordered for non-self aligning pillow block assemblies.

Ball Bearings – Twin Open Pillow Blocks IPPWN

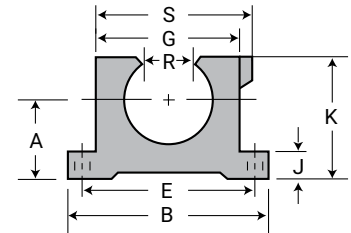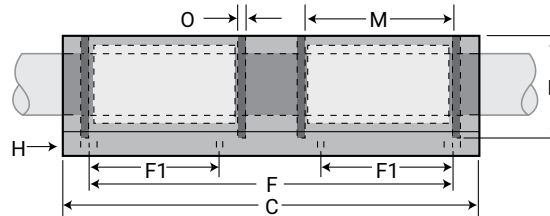


Part No.	Nom. Brg. Dia.	A	B	C	E	F	F1	G	H		J	K	M	O	P	R	S	Eaton Ret. Ring Part No.	Assem. WT.	Load Ratings	
		Centerline +/-0.001	Width	Length	+/- 0.010	+/- 0.010	+/- 0.010	Body Width	Bolt	Hole	Fling. Thick	Height	GRV. Space	GRV. Wide	GRV. Dia.	MIN. Open	Overall Width			Dynamic C	Static Co
Precision	in.																				
IPPWN08G	1/2	0.687	2.00	3.500	1.688	2.500	1.000	1.375	#6	5/32"	0.250	1.125	1.250	0.046	0.931	0.313	1.438	MNAN-87	0.400	228	352
IPPWN10G	5/8	0.875	2.50	4.000	2.125	3.000	1.125	1.750	#8	3/16"	0.281	1.438	1.500	0.056	1.197	0.375	1.813	MNAN-112	0.910	348	530
IPPWN12G	3/4	0.937	2.75	4.500	2.375	3.500	1.250	1.875	#8	3/16"	0.313	1.563	1.625	0.056	1.330	0.438	1.938	MNAN-125	1.060	386	614
IPPWN16G	1	1.187	3.25	6.000	2.875	4.500	1.750	2.375	#10	7/32"	0.375	1.938	2.250	0.068	1.671	0.563	2.438	MNAN-156	1.970	440	704
IPPWN20G	1-1/4	1.500	4.00	7.500	3.500	5.500	2.000	3.000	#10	7/32"	0.438	2.500	2.625	0.068	2.122	0.625	3.125	MNAN-200	3.725	704	1,230
IPPWN24G	1-1/2	1.750	4.75	9.000	4.125	6.500	2.500	3.500	1/4"	9/32"	0.500	2.875	3.000	0.086	2.519	0.750	3.625	MNAN-237	5.800	980	1,806
IPPWN32G	2	2.125	6.00	10.00	5.250	8.250	3.250	4.500	3/8"	13/32"	0.625	3.625	4.000	0.103	3.182	1.000	4.688	MNAN-300	12.125	1,716	3,568

Notes: (1) Pre-assembled IPP series pillow blocks include self-aligning housing and IP series precision bearings.
(2) Straight bore, "B" option must be ordered for non-self aligning pillow block assemblies.

Linear Ball Bearings Square Flange Mount

Ball Bearings – Square Flange Mount IPK

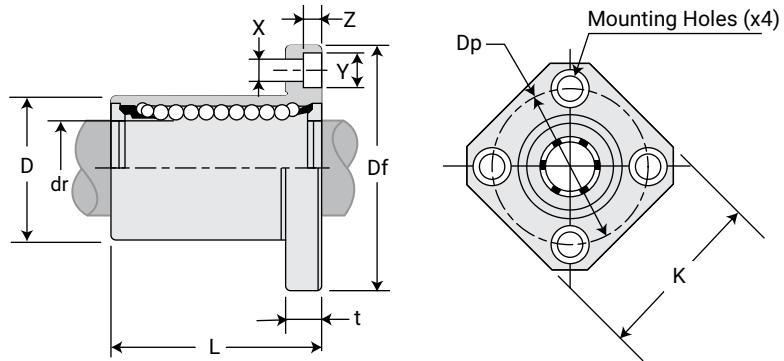

DIMENSIONAL INFORMATION

(Standard Steel Finish)

Part No. Standard Polymer Cage	Nominal Diameter			Ball Circuit	Weight lb.	Major Dimensions & Tolerances			
	Size in.	dr in.	Tolerance in.			D in.	Tolerance in.	L in.	Tolerance in.
IPK06G	3/8	0.375	+0/-0.0004	4	0.071	0.625	+0/-0.00065	0.875	+/- 0.012
IPK08G	1/5	0.500	+0/-0.0004	4	0.150	0.875	+0/-0.00065	1.250	+/- 0.012
IPK12G	3/4	0.750	+0/-0.0004	5	0.331	1.250	+0/-0.00075	1.625	+/- 0.012
IPK16G	1	1.000	+0/-0.0004	6	0.617	1.563	+0/-0.00075	2.250	+/- 0.012
IPK24G	1-1/2	1.500	+0/-0.0005	6	2.050	2.375	+0/-0.00090	3.000	+/- 0.012
IPK32G	2	2.000	+0/-0.0005	6	3.483	3.000	+0/-0.00100	4.000	+/- 0.012

Part No. Standard Polymer Cage	Nominal Diameter Size in.	Major Dimensions & Tolerances – Flange									Load Ratings	
		Df in.	K in.	T in.	DP in.	X in.	Y in.	Z in.	Eccentricity in./μm	Squareness in./μm	Dynamic C lb.	Static Co lb.
IPK06G	3/8	1.5000	1.2500	0.2500	1.0620	0.1875	0.2970	0.1719	0.0005	0.0005	51	71
IPK08G	1/5	1.7500	1.3750	0.2500	1.3125	0.1875	0.2970	0.1719	0.0005	0.0005	115	176
IPK12G	3/4	2.1875	1.6875	0.3125	1.7188	0.2188	0.3440	0.2031	0.0006	0.0006	194	308
IPK16G	1	2.5000	2.0000	0.3125	2.0313	0.2188	0.3440	0.2031	0.0006	0.0006	220	353
IPK24G	1-1/2	3.7500	3.0000	0.5000	3.0625	0.3438	0.5000	0.3281	0.0010	0.0010	490	904
IPK32G	2	4.3750	3.5000	0.5000	3.6875	0.3438	0.5000	0.3281	0.0010	0.0010	859	1,785

Notes: Contact PBC Linear about availability of additional sizes.




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series–page 52 Metric Series–page 94

Linear Ball Bearings Round Flange Mount

Double Wide Ball Bearings – Square Flange Mount IPK-W

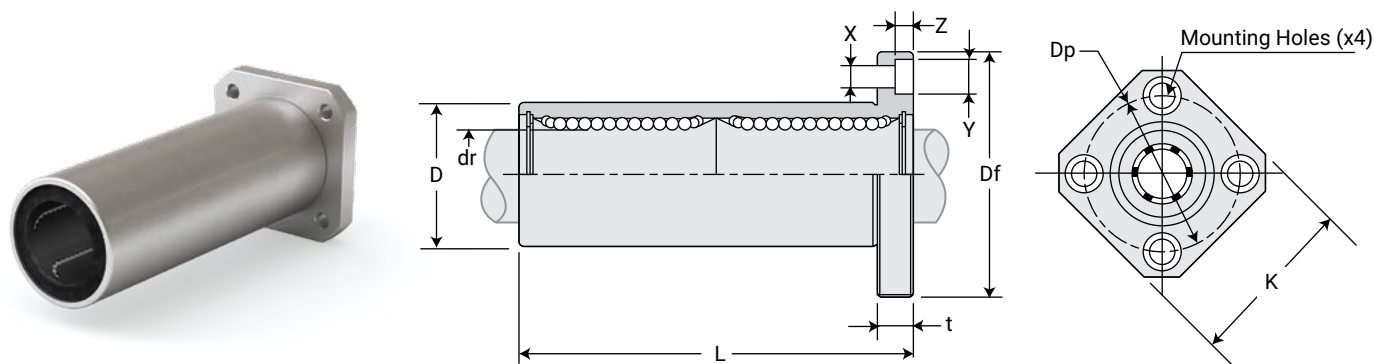

DIMENSIONAL INFORMATION

(Standard Steel Finish)

Part No.	Nominal Diameter			Ball Circuit	Weight lb.	Major Dimensions & Tolerances			
	Size in.	dr in.	Tolerance in.			D in.	Tolerance in.	L in.	Tolerance in.
IPK06GW	3/8	0.375	+0/-0.0004	4	0.099	0.625	+0/-0.00065	1.594	+/- 0.012
IPK08GW	1/2	0.500	+0/-0.0004	4	0.234	0.875	+0/-0.00065	2.375	+/- 0.012
IPK10GW	5/8	0.625	+0/-0.0004	4	0.441	1.125	+0/-0.00065	2.813	+/- 0.012
IPK12GW	3/4	0.750	+0/-0.0005	6	0.529	1.250	+0/-0.00075	3.094	+/- 0.012
IPK16GW	1	1.000	+0/-0.0005	6	1.036	1.563	+0/-0.00075	4.281	+/- 0.012
IPK20GW	1-1/4	1.250	+0/-0.0006	6	2.061	2.000	+0/-0.00090	5.000	+/- 0.012
IPK24GW	1-1/2	1.500	+0/-0.0006	6	3.219	2.375	+0/-0.00090	5.688	+/- 0.012
IPK32GW	2	2.000	+0/-0.0006	6	5.776	3.000	+0/-0.00100	7.750	+/- 0.012

Part No.	Nominal Diameter	Major Dimensions & Tolerances – Flange									Load Ratings	
Standard Polymer Cage	Size	Df	K	T	Dp	X	Y	Z	Eccentricity	Squareness	Dynamic C	Static Co
	in.	in.	in.	in.	in.	in.	in.	in.	in./μm	in./μm	lb.	lb.
IPK06GW	3/8	1.5000	1.2500	0.2500	1.0620	0.1875	0.2969	0.1719	0.0006	0.0006	79	142
IPK08GW	1/2	1.7500	1.3750	0.2500	1.3125	0.1875	0.2969	0.1719	0.0006	0.0006	183	353
IPK10GW	5/8	2.0000	1.6250	0.2500	1.5625	0.1875	0.2969	0.1719	0.0006	0.0006	277	528
IPK12GW	3/4	2.1875	1.6875	0.3125	1.7188	0.2188	0.3438	0.2031	0.0008	0.0008	308	616
IPK16GW	1	2.5000	2.0000	0.3125	2.0313	0.2188	0.3438	0.2031	0.0008	0.0008	353	706
IPK20GW	1-1/4	3.1250	2.5000	0.3750	2.5625	0.2813	0.4063	0.2656	0.0010	0.0010	562	1,234
IPK24GW	1-1/2	3.7500	3.0000	0.5000	3.0625	0.3438	0.5000	0.3281	0.0010	0.0010	771	1,807
IPK32GW	2	4.3750	3.5000	0.5000	3.6875	0.3438	0.5000	0.3281	0.0012	0.0012	1,367	3,574

Notes: Contact PBC Linear about availability of additional sizes.




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Linear Ball Bearings Double Wide

Ball Bearings – Round Flange Mount IPF

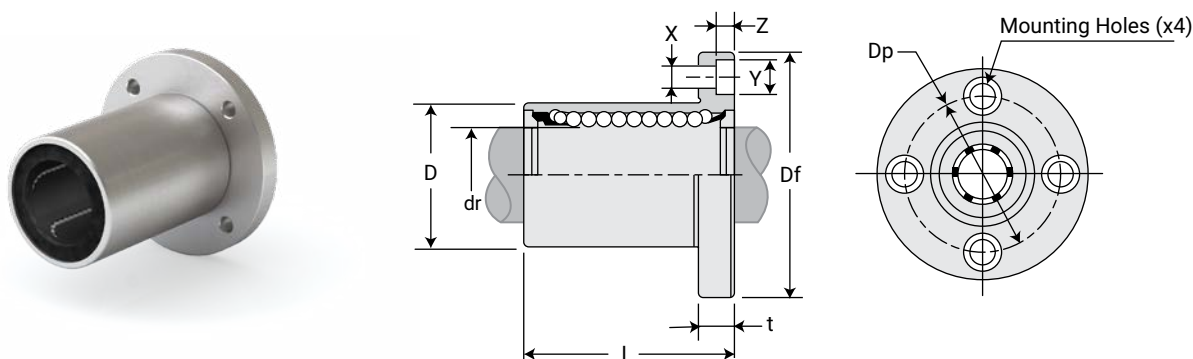

DIMENSIONAL INFORMATION

(Standard Steel Finish)

Part No. Standard Polymer Cage	Nominal Diameter			Ball Circuit	Weight lb.	Major Dimensions & Tolerances			
	Size in.	dr in.	Tolerance in.			D in.	Tolerance in.	L in.	Tolerance in.
IPF04G	1/4	0.250	+0/-0.0004	4	0.0705	0.500	+0/-0.00050	0.750	+/- 0.012
IPF06G	3/8	0.375	+0/-0.0004	4	0.1036	0.625	+0/-0.00065	0.875	+/- 0.012
IPF16G	1	1.000	+0/-0.0004	6	0.7165	1.563	+0/-0.00075	2.250	+/- 0.012

Part No. Standard Polymer Cage	Nominal Diameter	Major Dimensions & Tolerances – Flange								Load Ratings	
	Size in.	Df in.	T in.	Dp in.	X in.	Y in.	Z in.	Eccentricity in./μm	Squareness in./μm	Dynamic C lb.	Static Co lb.
IPF04G	1/4	1.250	0.2190	0.8750	0.1560	0.250	0.141	0.0005	0.0005	46	60
IPF06G	3/8	1.500	0.2500	1.0620	0.1875	0.297	0.172	0.0005	0.0005	51	71
IPF16G	1	2.500	0.3125	2.0313	0.2188	0.344	0.203	0.0006	0.0006	220	353

Notes: Contact PBC Linear about availability of additional sizes.




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Linear Ball Bearings Double Wide

Double Wide Ball Bearings – Round Flange Mount IPF-W

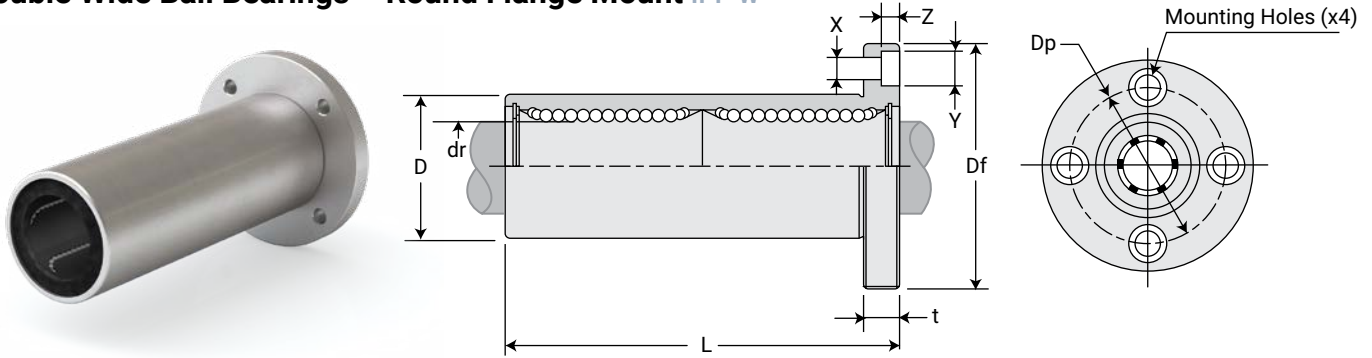

DIMENSIONAL INFORMATION


(Standard Steel Finish)

Part No.	Nominal Diameter			Ball Circuit	Weight lb.	Major Dimensions & Tolerances			
Standard Polymer Cage	Size in.	dr in.	Tolerance in.			D in.	Tolerance in.	L in.	Tolerance in.
IPF08GW	1/2	0.50	+0/-0.0004	4	0.278	0.875	+0/-0.00065	2.375	+/- 0.012

Notes: Contact PBC Linear about availability of additional sizes.

Part No.	Nominal Diameter	Major Dimensions & Tolerances – Flange								Load Ratings	
Standard Polymer Cage	Size in.	Df in.	T in.	Dp in.	X in.	Y in.	Z in.	Eccentricity in./μm	Squareness in./μm	Dynamic C lb.	Static Co lb.
IPF08GW	1/2	1.75	0.25	1.3125	0.1875	0.2969	0.1719	0.0006	0.0006	183	353

Ball Bearings – Round Flange Center Mount IPFC

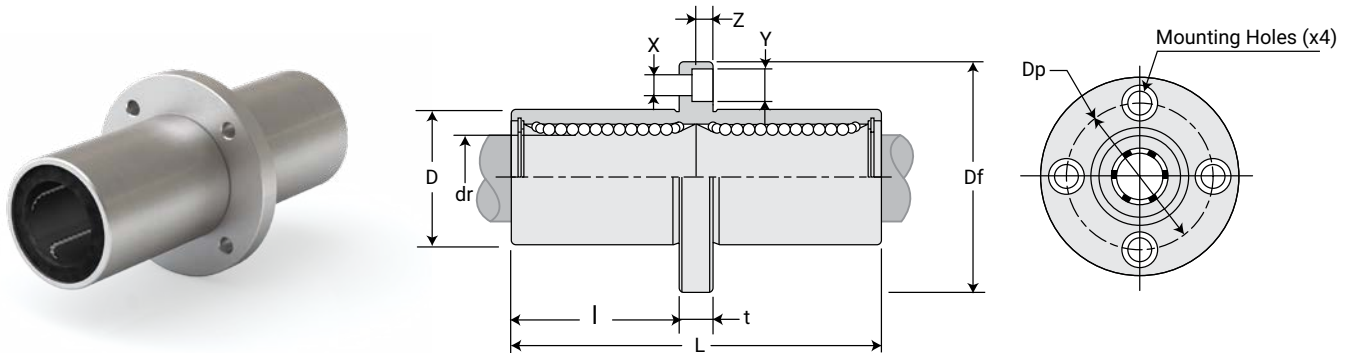

DIMENSIONAL INFORMATION

(Standard Steel Finish)

Part No.	Nominal Diameter			Ball Circuit	Weight lb.	Major Dimensions & Tolerances			
Standard Polymer Cage	Size in.	dr in.	Tolerance in./μm			D in.	Tolerance in./μm	L in.	Tolerance in./μm
IPFC16G	1	1.00	+0/-0.0005	6	515	1.563	+0/-0.00075	4.281	+/- 0.012
IPFC32G	2	2.00	+0/-0.00059	6	2,800	3.000	+0/-0.00100	7.750	+/- 0.012

Notes: Contact PBC Linear about availability of additional sizes.

Part No.	Nominal Diameter	Major Dimensions & Tolerances – Flange									Load Ratings	
Standard Polymer Cage	Size	I	Df	T	Dp	X	Y	Z	Eccentricity	Squareness	Dynamic C	Static Co
	in.	in.	in.	in.	in.	in.	in.	in.	in./μm	in./μm	lb.	lb.
IPFC16G	1	1.9844	2.500	0.3125	2.0313	0.2188	0.3438	0.2031	0.0008	0.0008	353	706
IPFC32G	2	3.6250	4.375	0.5000	3.6875	0.3437	0.5000	0.3281	0.0012	0.0012	1,367	3,574

Roller Pillow Block Bearings Overview

Roller Pillow Blocks

The Roller Pillow Block provides key performance benefits such as high load capacities, high speeds, and design compatibility—providing size interchangeability with industry standard blocks. In contaminated environments, the roller bearings push particulates out of the way or roll seamlessly over them. Large rollers in the Roller Pillow Block system are well suited for long travel applications, minimizing vibration and providing smooth and quiet travel over joined shafts.

The Roller Pillow Block solution is available for shaft diameters from 0.5"–3.0" and in three standard configurations; single, double, and twin. This provides dynamic load ratings ranging from 800 to 12500 pounds, a low coefficient of friction, and high speed capabilities.

The Roller Pillow Block system is well suited for a wide range of applications, including material handling, transfer lines, welding equipment, architectural and structural doors, and much more.



Eccentric bearing adjustment enables fine-tuned adjustments



Large cam follower navigates jointed shafts and rail assemblies with ease

- Designed for high loads and/or speeds
- Loads up to 12,500 pounds
- Simplified installation and alignment
- Self-aligning
- Adjustable
- Superior for joined rail applications
- Standard mounting holes
- Interchangeability with industry standards
- Re-buildable
- Visit pbcllinear.com to configure a product solution with our configurator



Roller Pillow Block Bearings Overview

Reliability

- Large cam follower design with side seals delivers superior contaminant resistance
- Excels in long travel joined shafts or rail assemblies
- Accessories such as lubrication ports and scrapers available for ease of maintenance and maximum life




Roller pillow block's large cam follower navigates joined shafts and rail assemblies with ease



Watch the product overview video

Misalignment of shafts due to installation procedures or non-matched shafts can lead to premature or catastrophic ball bearing failures



High Performance

- Speeds up to 2.5 times faster than a linear ball bearing pillow block
- Higher dynamic load capacity compared to industry standard linear ball bearing pillow blocks
- Smoother travel equals lower vibration and noise

Dynamic Load Ratings

Shaft Diameter

1"

1 1/2"

2"



**Open-Style
Ball Bearing**

220 lb

490 lb

858 lb

**Single
Roller Pillow Block**



955 lb

1,660 lb

2,400 lb

**Double & Twin
Roller Pillow Block**



1,910 lb

3,320 lb

4,800 lb

Dynamic load rating for a 3" shaft would be 6,260 lb for the Single Roller Pillow Block and 12,520 lb for the Double and Twin Roller Pillow Block.

Inch Part # 8 (1/2")

Inch Part # 12 (3/4") • Metric Part # 20 mm

Inch Part # 20 (1 1/4") • Metric Part # 30 mm

Inch Part # 10 (5/8") • Metric Part # 16 mm


Inch Part # 16 (1") • Metric Part # 25 mm

Carriage profiles shown at 1:1 scale.


Roller Pillow Block Bearings Overview

Lower System Cost

- Simplified installation and alignment
- Floating pillow block option available accommodating up to 0.125" out-of-parallelism, reducing installation time and cost dramatically
- Simple eccentric bearing adjustment allows for tailored bearing fit to application requirements

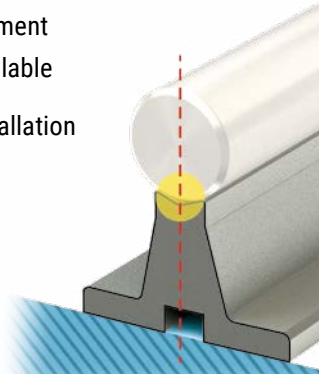

V-block shaped support rail design aligns shaft centerlines simplifying joined rail assemblies


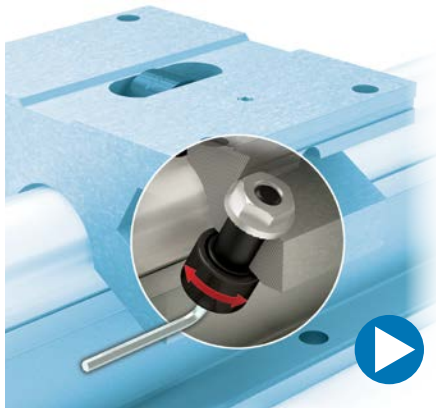


Watch the Roller Pillow Block adjustment video

Eccentric bearing adjustment enables fine-tuned adjustments

Design Compatibility

- Interchangeability to industry standard mounting holes and centerlines for linear bearing pillow blocks from leading competitors

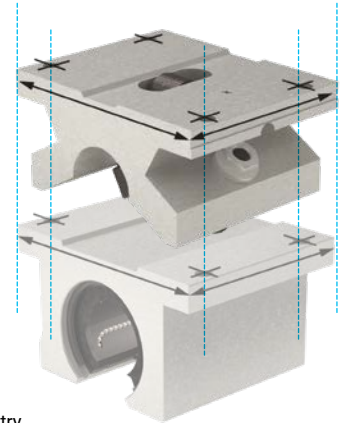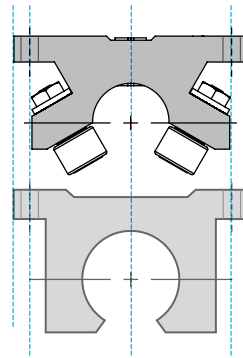

PBC Linear Roller Pillow Block is industry standard interchangeable, simplifying replacement and lowering costs

Note: When a linear ball bearing failure occurs, the shafting is easily damaged and needs to be replaced. When using the roller pillow block, that is not always the case. Consult factory for details.

Inch Part # 48 (3")

Inch Part # 32 (2")


Inch Part # 24 (1½")

Performance

Roller Pillow Block Applications


Welding Machines

Roller Pillow Blocks are corrosion resistant and handle loads up to 12,500 lbs, providing the industrial strength linear motion required in welding applications. The low-friction rollers easily navigate joined or misaligned shafts and also account for shaft deflection.

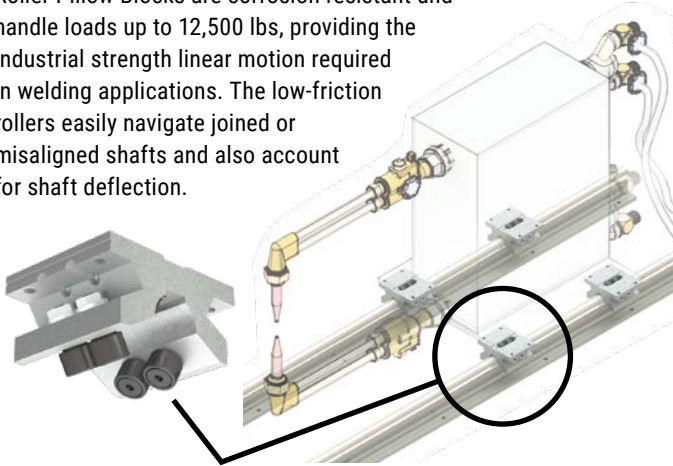

Industrial Stop Gauge & Push Feed System

The twin Roller Pillow Block provides the rigidity of a heavy duty bearing system for band saws, punches, bending machines, and brakes. Double and twin Roller Pillow Blocks are ideal for applications requiring high load capacities with long life.

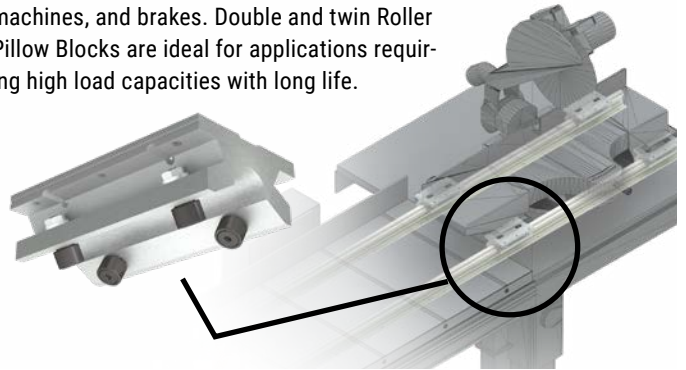

Rack Systems & Industrial Container Mobility




The Roller Pillow Block system carries heavy loads and easily maneuvers over joined or misaligned shafts over long travels. The system is corrosion resistant and provides high speeds and rigidity in the toughest applications.

Roller Bearings move smoothly over misaligned and joined shafts over long travels.




Sliding Doors

Roller Pillow Block systems provide smooth and quiet travel in a wide range of environments.

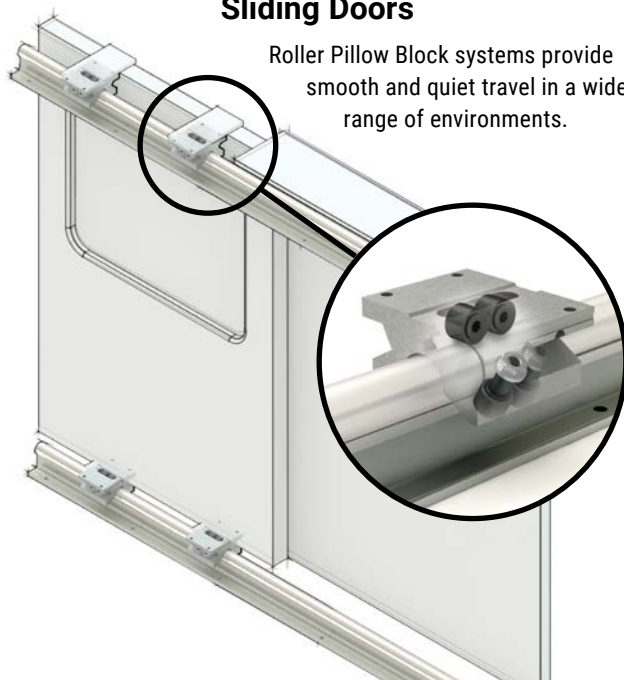

Pipe Mill

Roller Pillow Blocks provide smooth linear motion in the toughest environments. Large cam followers, equipped with side seals, deliver industrial strength performance over long travel lengths and excel in dirty environments.

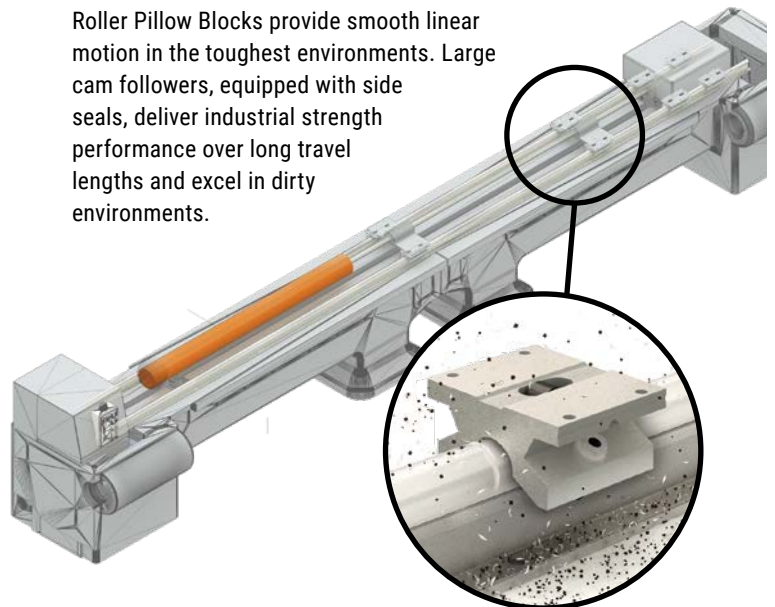


Roller Pillow Block Bearings

Single Roller Pillow Block **SPB-OPN**


Low friction single Roller Pillow Blocks are selected for standard linear movement or for situations with shaft deflection. Self-aligning Roller Pillow Blocks can handle a half of a degree in misalignment.

Note: To learn more about turning a curve with a single Roller Pillow Block, please reference the technical information on page 156.

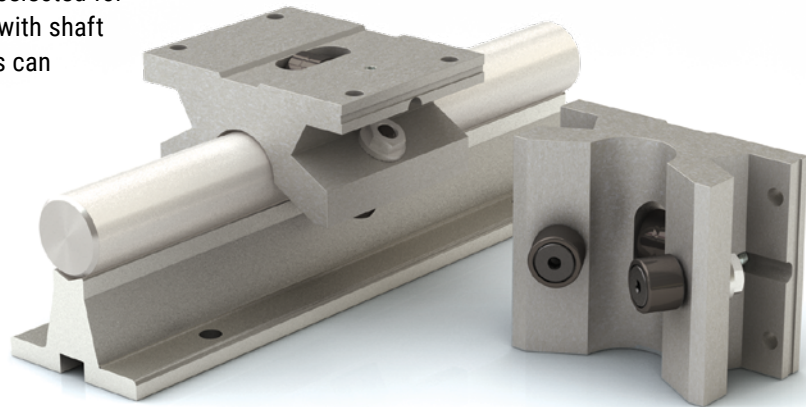

Dimensions and Load Ratings Inch Shafting


Part Number	Shaft Diameter in.	DYN. Load Rating lb.	Weight lb.	A ±0.003	B in.	C in.	D in.	E ±0.005	F ±0.005	G in.	H Bolt Hole	J in.	K in.
SPB-08-OPN	1/2	400	0.40	0.687	2.000	1.500	1.156	1.688	1.000	1.000	#6 0.1563	0.240	0.313
SPB-10-OPN	5/8	500	0.50	0.875	2.500	1.750	1.406	2.125	1.125	1.063	#8 0.1875	0.270	0.375
SPB-12-OPN	3/4	600	0.60	0.937	2.750	1.875	1.563	2.375	1.250	1.063	#8 0.1875	0.303	0.438
SPB-16-OPN	1	955	1.00	1.187	3.254	2.625	2.000	2.875	1.750	1.375	#10 0.2188	0.360	0.688
SPB-20-OPN	1-1/4	1,400	2.00	1.500	4.000	3.375	2.563	3.500	2.000	1.750	#10 0.2188	0.424	0.813
SPB-24-OPN	1-1/2	1,660	2.80	1.750	4.750	3.750	2.875	4.125	2.500	1.875	1/4 0.2813	0.474	1.063
SPB-32-OPN	2	2,400	5.00	2.125	6.000	4.750	3.500	5.250	3.250	2.500	3/8 0.4063	0.600	1.375
SPB-48-OPN	3	6,260	14.00	3.500	8.375	5.500	5.500	7.000	4.000	3.875	5/8 0.6563	1.000	2.125

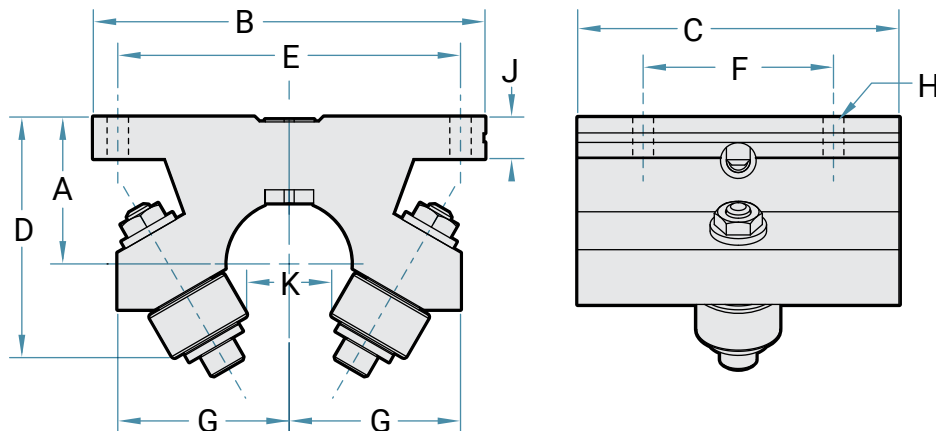

Roller Pillow Block Bearings


Double Roller Pillow Block DPB-OPN

Double the capacity of the Single Roller Pillow Block. The double Roller Pillow Blocks offer twice the dynamic load rating in a similar mounting footprint. The Double Roller Pillow Blocks are used when longer travel life or an increase in load capacity is required.

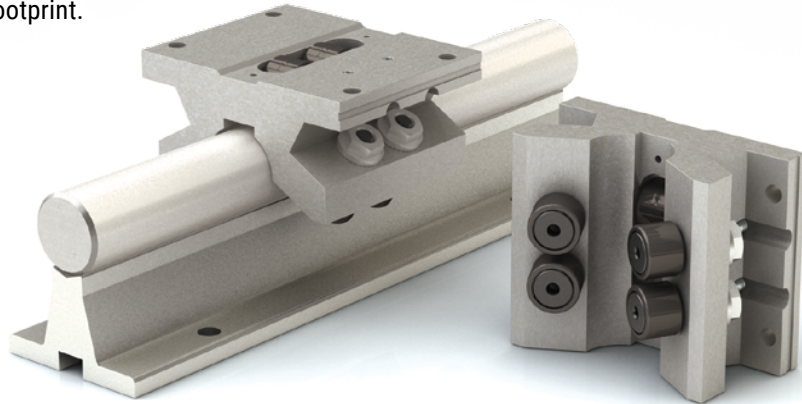

Dimensions and Load Ratings Inch Shafting


Part Number	Shaft Diameter	DYN. Load Rating	Weight lb.	A	B	C	D	E	F	G	H		J	K	L
	in.			±0.003	in.	in.	in.	±0.005	±0.005	in.	Bolt	Hole	in.	in.	in.
DPB-08-OPN	1/2	800	0.50	0.687	2.000	2.000	1.156	1.688	1.625	1.000	#6	0.1563	0.240	0.313	0.562
DPB-10-OPN	5/8	1,000	0.70	0.875	2.500	2.500	1.406	2.125	2.000	1.063	#8	0.1875	0.270	0.375	0.526
DPB-12-OPN	3/4	1,200	0.80	0.937	2.750	2.625	1.563	2.375	1.250	1.063	#8	0.1875	0.300	0.438	0.562
DPB-16-OPN	1	1,910	1.20	1.187	3.254	2.625	2.000	2.875	1.750	1.375	#10	0.2188	0.360	0.688	0.720
DPB-20-OPN	1-1/4	2,800	2.30	1.500	4.000	3.375	2.563	3.500	2.000	1.750	#10	0.2188	0.424	0.813	0.937
DPB-24-OPN	1-1/2	3,320	3.00	1.750	4.750	3.750	2.875	4.125	2.500	1.875	1/4	0.2813	0.474	1.063	0.937
DPB-32-OPN	2	4,800	5.50	2.125	6.000	4.750	3.500	5.250	3.250	2.500	3/8	0.4063	0.603	1.375	1.187
DPB-48-OPN	3	12,520	20.00	3.500	8.375	7.250	5.500	7.000	5.875	3.875	5/8	0.6563	1.000	2.125	2.080

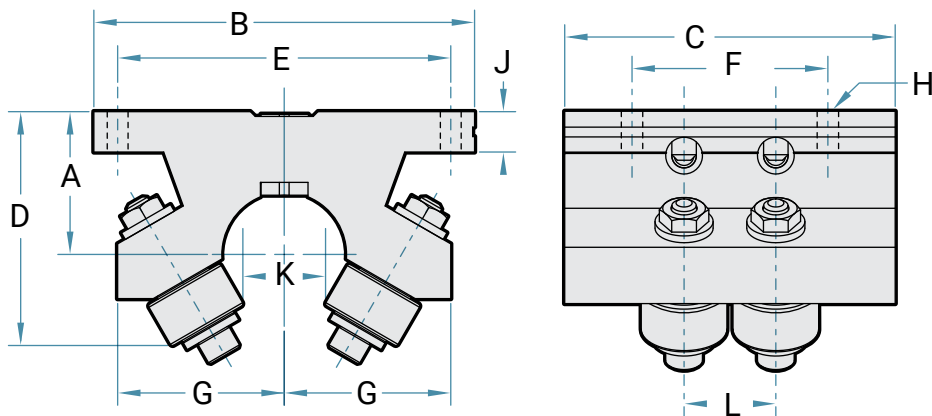

Roller Pillow Block Bearings


Twin Roller Pillow Block **TWN-OPN**

The Twin Roller Pillow Block load rating is the same as the double and is a good choice when using only one Roller Pillow Block per shaft. The twin model also offers an additional pair of mounting holes.

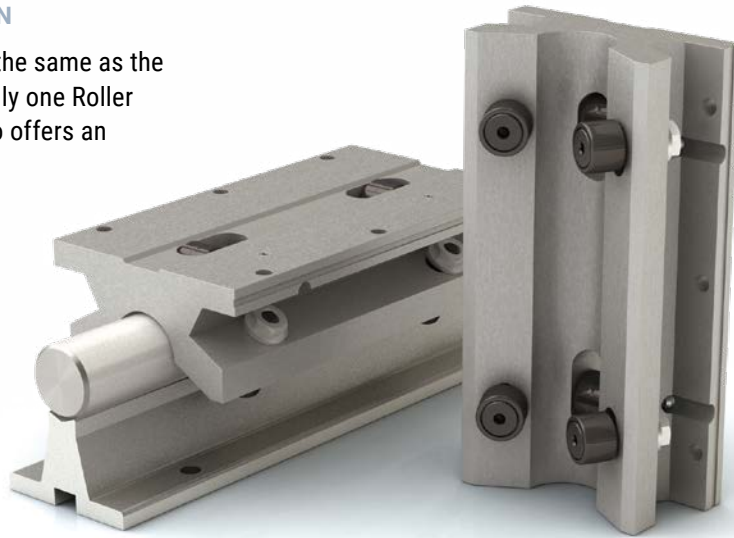

Dimensions and Load Ratings Inch Shafting

Part Number	Shaft Diameter	DYN. Load Rating	Weight	A	B	C	D	E	F	G	H		J	K	L
	in.	lb.		lb.	±0.003	in.	in.	in.	±0.005	±0.005	in.	Bolt	Hole	in.	in.
TWN-08-OPN	1/2	800	0.80	0.687	2.000	3.50	1.156	1.688	2.50	1.000	#6	0.1563	0.240	0.313	1.500
TWN-10-OPN	5/8	1,000	1.00	0.875	2.500	4.00	1.406	2.125	3.00	1.063	#8	0.1875	0.270	0.375	2.125
TWN-12-OPN	3/4	1,200	1.20	0.937	2.750	4.50	1.563	2.375	3.50	1.063	#8	0.1875	0.300	0.438	2.500
TWN-16-OPN	1	1,910	2.30	1.187	3.254	6.00	2.000	2.875	4.50	1.375	#10	0.2188	0.360	0.688	3.750
TWN-20-OPN	1-1/4	2,800	4.40	1.500	4.000	7.50	2.563	3.500	5.50	1.750	#10	0.2188	0.424	0.813	4.625
TWN-24-OPN	1-1/2	3,320	6.50	1.750	4.750	9.00	2.875	4.125	6.50	1.875	1/4	0.2813	0.474	1.063	5.500
TWN-32-OPN	2	4,800	12.40	2.125	6.000	12.00	3.500	5.250	10.50	2.500	3/8	0.4063	0.600	1.375	8.250

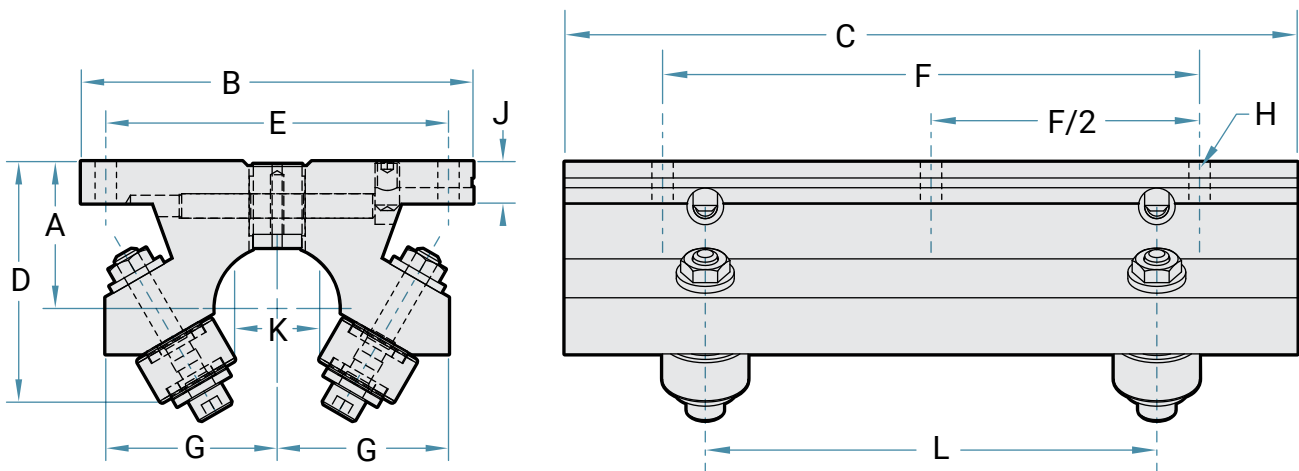


Roller Pillow Block Accessories

Top Grease Option

Roller Pillow Block rollers are lubricated and sealed. In some applications it is desired to re-grease the main support roller. The top grease option can help achieve full bearing life in applications that reduce or contaminate the grease of the roller. Such conditions may exist in applications where solvents or contaminants leach out the grease through the vents in the seals, or where contaminants are so fine or extreme they must be purged out of the roller with fresh grease. The top grease option is also recommended when high speeds or high temperatures are present. The top grease option is available on pillow blocks that are 1-1/4" or larger.

To order, add the suffix, "TG" after the pillow block model number.

Note: Shock, vibration, and moments may affect the life of the pillow block.

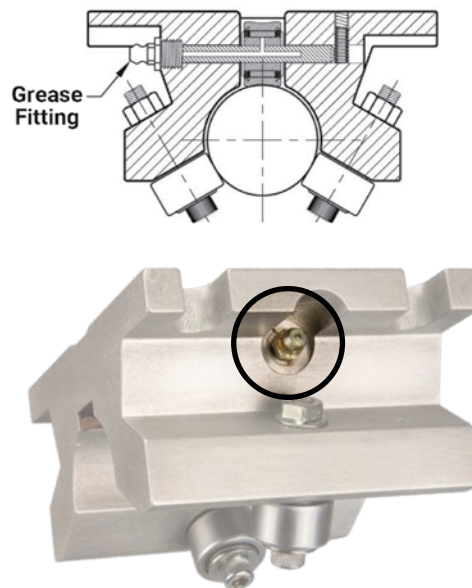

Floating Option


The only product on the market that addresses the non-parallel shafting problem is a Roller Pillow Block with the floating option. Also useful when trying to align long shafts, floating Roller Pillow Blocks should be used on one shaft with the standard pillow block on the other. Special grease is included for the grooves on top of each floating pillow block.

During installation do not over-tighten the mounting bushings as this will cause them to bind.

To order, add the prefix, "F-" to the single, double, or twin Roller Pillow Block number.




Pillow Block Size	Floating Movement
8	0.0625"
10	0.0625"
12	0.0625"
16	0.0938"
20	0.1250"
24	0.1250"
32	0.1563"
48	0.1875"
64	0.1875"

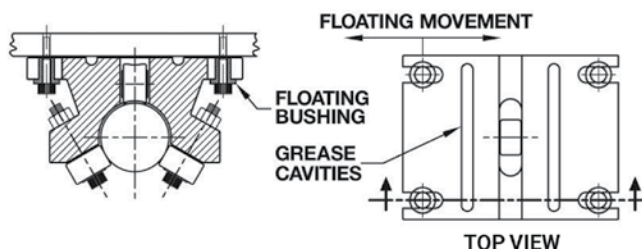

Scraper Option

Reduce the amount of dirt accumulation that lands on the top of the Roller Pillow Block shaft with the scraper option. Available only on specially machined pillow blocks, the scraper is mounted to each end of the bearing assembly to clean the shaft in either direction. Made from spring-tempered beryllium copper that conforms to the shaft diameter, the scraper will perform successfully after a short break in period. Scraper model is not available as a retrofit.

To order this option, add the suffix "-S" after the pillow block model number.

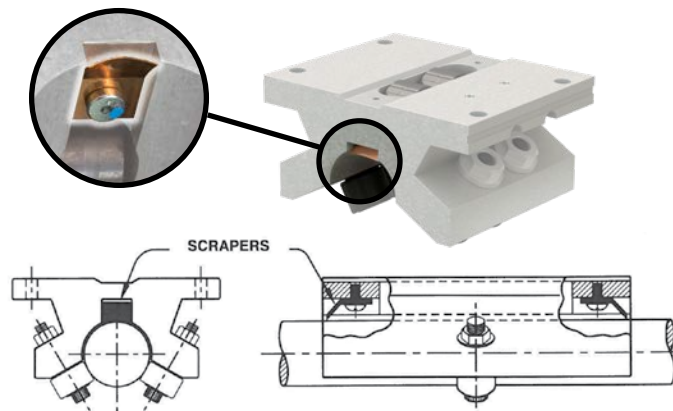

Roller Pillow Block Accessories

INCH

ISO METRIC



JIS METRIC

Linear Carriage Lock

The linear carriage lock is a positive locking device for linear slides, carriages, and bearings.

The locks are:

- Self-centering
- Corrosion resistant
- Strong holding
- Contaminant resistant
- Easily mounted
- Maintenance-free

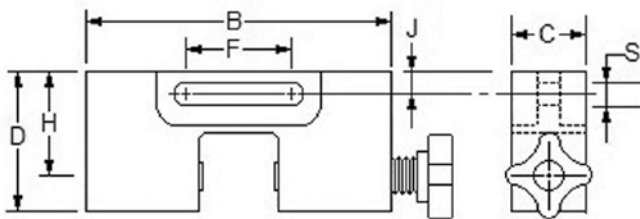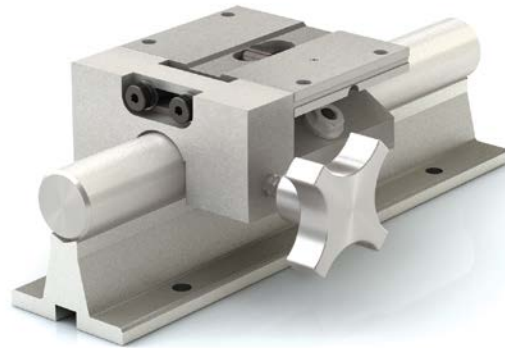

Part Number	Shaft Diameter in.	D in.	B in.	C in.	J in.	F in.	H in.	S in.
LCL-08	1/2	0.92	2.00	1	0.22	0.81	0.69	0.26
LCL-12	3/4	1.25	2.75	1	0.22	0.81	0.94	0.26
LCL-16	1	1.60	3.25	1	0.27	0.81	1.18	0.26
LCL-24	1-1/2	2.29	4.75	1	0.40	0.81	1.75	0.26
LCL-32	2	2.85	6.00	1	0.50	1.25	2.13	0.50

Note: When ordering with a Roller Pillow Block that it will be mounted to, just add "-LCL" to the Roller Pillow Block part number (EX: SPB-12-OPN-LCL)

Pillow Block Rebuild Kits

The Roller Pillow Block rebuild kit contains all the parts required for a complete unit rebuild:

- One fixed side roller
- One eccentric side roller
- One top support roller
- One top roller axle
- One set screw




FUBK08-16

FUBK20-48

Part Number	Shaft Diameter	
	inch	metric
FUBK08	1/2"	12 mm
FUBK10	5/8"	16 mm
FUBK12	3/4"	20 mm
FUBK16	1"	25 mm
FUBK20	1-1/4"	30 mm
FUBK24	1-1/2"	N/A
FUBK32	2"	N/A
FUBK48	3"	N/A

To rebuild a Double or Twin Roller Pillow Block, please order 2 kits.

All parts of a Roller Pillow Block should be replaced before re-installation.

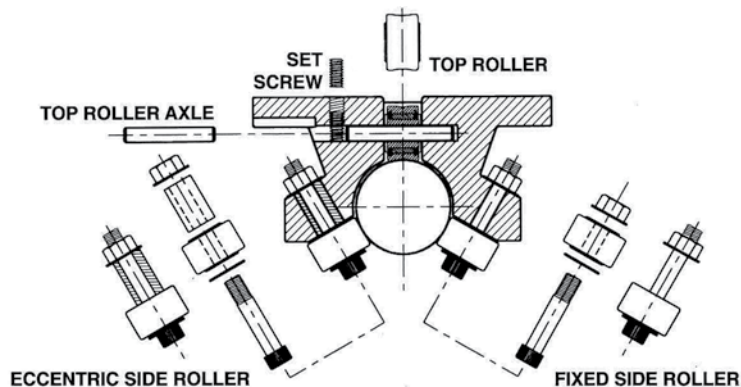

Shaft & Rail Systems



Shaft & Rail Systems

PBC Linear offers shaft and rail systems composed of world-class linear motion components in six standard configurations in four different sizes.

These systems also come with the option of carriage plates with or without mounted pillow blocks.

Support Block System


Support block systems are manufactured with Roller Pillow Block(s), 60 Plus® precision case hardened and ground shaft, and two steel support blocks.

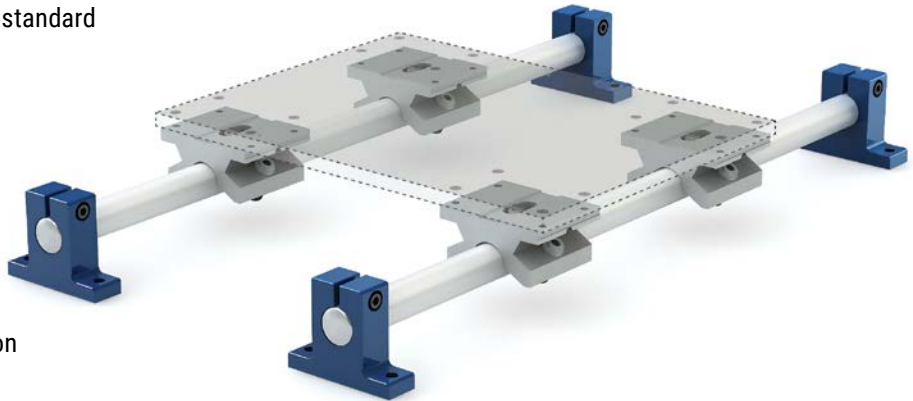


Support Block System
End View



Single Pillow Block System
Part Number Prefix: **S1S**



Double Pillow Block System
Part Number Prefix: **S1D**



Twin Pillow Block System
Part Number Prefix: **S1T**

Technical Information

Type Roller Pillow Block	Part Number	Shaft Diameter in.	Total Basic Dynamic Rating lb.	Number Roller Pillow Blocks	Number Support Blocks	Number Hardened Shafts	A in.	B in.	G in.	H in.	J in.	K in.	P in.	S in.
Single	S1S08	0.50	800	2	2	1	1.00	2.00	1.63	2.187	3.25	0.63	5.50	5.25
Double	S1D08	0.50	1,600	2	2	1	1.00	2.00	1.63	2.187	3.25	0.63	5.50	5.25
Twin	S1T08	0.50	800	1	2	1	1.00	2.00	1.63	2.187	3.25	0.63	5.50	5.25
Single	S1S12	0.75	1,200	2	2	1	1.25	2.75	2.13	2.937	4.50	0.75	7.50	7.25
Double	S1D12	0.75	2,400	2	2	1	1.25	2.75	2.13	2.937	4.50	0.75	7.50	7.25
Twin	S1T12	0.75	1,200	1	2	1	1.25	2.75	2.13	2.937	4.50	0.75	7.50	7.25
Single	S1S16	1.00	1,910	2	2	1	1.50	3.25	2.63	3.437	5.50	1.00	9.00	8.75
Double	S1D16	1.00	3,820	2	2	1	1.50	3.25	2.63	3.437	5.50	1.00	9.00	8.75
Twin	S1T16	1.00	1,910	1	2	1	1.50	3.25	2.63	3.437	5.50	1.00	9.00	8.75
Single	S1S24	1.50	3,320	2	2	1	2.00	4.75	3.50	5.000	8.00	1.25	13.00	12.75
Double	S1D24	1.50	6,640	2	2	1	2.00	4.75	3.50	5.000	8.00	1.25	13.00	12.75
Twin	S1T24	1.50	3,320	1	2	1	2.00	4.75	3.50	5.000	8.00	1.25	13.00	12.75

Shaft & Rail Systems





INCH

ISO METRIC

JIS METRIC

Support Rail Systems

Support rail systems are manufactured with Roller Pillow Blocks and 60 Plus® precision case hardened and ground shaft that is mounted on a continuous aluminum support rail. To prevent the carriage from sliding off the shaft, end stops can be purchased.

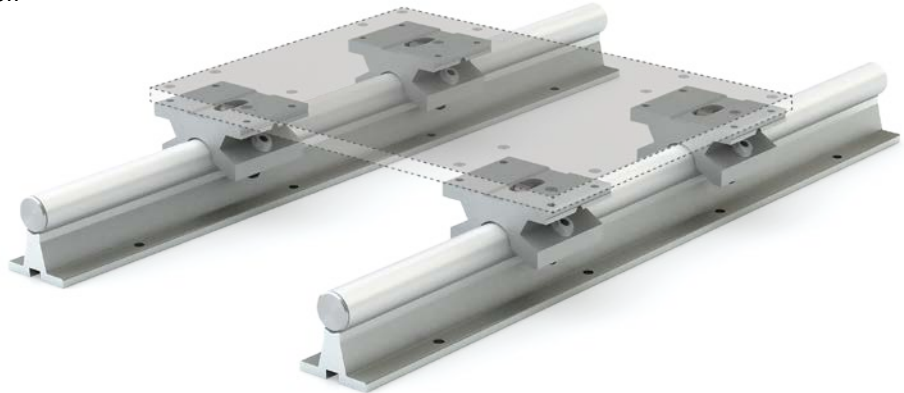

End View

Single Pillow Block System
Part Number Prefix: **S2S**

Double Pillow Block
Part Number Prefix: **S2D**

Twin Pillow Block
Part Number Prefix: **S2T**

Technical Information

Type Roller Pillow Block	Part Number	Shaft Diameter in.	Total Basic Dynamic Rating lb.	Number Roller Pillow Blocks	Number Continuous Support Rail	Number Hardened Shafts	A in.	H in.	J in.	P in.	S in.
Single	S2S08	1/2	800	2	1	1	1.125	2.187	3.25	5.5	4.75
Double	S2D08	1/2	1,600	2	1	1	1.125	2.187	3.25	5.5	4.75
Twin	S2T08	1/2	800	1	1	1	1.125	2.187	3.25	5.5	4.75
Single	S2S12	3/4	1,200	2	1	1	1.500	2.937	4.50	7.5	6.25
Double	S2D12	3/4	2,400	2	1	1	1.500	2.937	4.50	7.5	6.25
Twin	S2T12	3/4	1,200	1	1	1	1.500	2.937	4.50	7.5	6.25
Single	S2S16	1	1,910	2	1	1	1.750	3.437	5.50	9.0	7.63
Double	S2D16	1	3,820	2	1	1	1.750	3.437	5.50	9.0	7.63
Twin	S2T16	1	1,910	1	1	1	1.750	3.437	5.50	9.0	7.63
Single	S2S24	1-1/2	3,320	2	1	1	2.500	5.000	8.00	13.0	11.00
Double	S2D24	1-1/2	6,640	2	1	1	2.500	5.000	8.00	13.0	11.00
Twin	S2T24	1-1/2	3,320	1	1	1	2.500	5.000	8.00	13.0	11.00

Round Shafting

Simplicity 60 Plus® Shafting

PBC Linear® formulated a linear shaft designed specifically for optimal bearing performance – 60 Plus Shafting. Advanced process capabilities maintain the ideal surface finish for linear bearings resulting in the longest life and highest performing shaft-to-bearing combination available:

Optimized surface finish

Faster break-in and better Frelon® transfer for plain bearings

Longest life possible, less down time and maintenance

Straight to within 0.001" to 0.002" per foot cumulative, except on 3/8" diameter and smaller



See Pages 59–60 for machining options.



Inch Shaft Part • Numbering Chart



Configure
Online

Special

CM - Custom Machine

SL - Specified Length

Shaft Length

Inch - 000.000

Shaft Material

No Entry - 1060 CS

SS - 440 SS

SS420 - 420 SS

SS316 - 316 SS*

CP - Chrome plate**

AR - Armoloy**

* 300 Series available in most diameters

**Available as special quotes

Note: Chrome will have a guaranteed thickness of 0.0001" to 0.0005".

Chrome thickness will be in addition to the catalog diameter of the shaft.

Code	Class Description
NIL	Inch Class L Shaft (Steel)
NIPDL	Inch Class L Predrill (Steel)
CC	Feather Inch (Aluminum)
CCPDL	Feather Inch Predrill (Aluminum)
SR	Inch Support Rail (Aluminum)
SRA	Inch Support Rail Assembly (Aluminum)
CCR	Feather Rail Assembly (Aluminum)
LSRA	Inch Low Support Rail Assembly (Steel)
LSR	Inch Low Support Rail (Steel)
LSG	Inch Low Support Rail Assembly (Steel)
NIS	Inch Class S Shaft (Steel)
NIN	Inch Class N Shaft (Steel)

Code	Diameter Desc.
03	3/16"
04	1/4"
06	3/8"
08	1/2"
10	5/8"
12	3/4"
16	1"
20	1 1/4"
24	1 1/2"
32	2"
40	2 1/2"
48	3"
64	4"

Sample Part Numbers

Feather inch, 1" diameter and 15" long

CC16-015.000-SL

Support rail assembly 1.5" diameter
440 stainless steel and 12" long

SRA24SS-012.000-SL

Round Shafting Steel & Stainless Steel

Simplicity
60 PLUS
SHAFTING

Simplicity RC60 Steel Solid Shafting NI

RC 60 Plus case hardened steel shafting

Optimized for Simplicity bearings and linear ball bearings

Available cut-to-length or full lengths

Length tolerance:

3/16" – 1-1/4" shaft = +/- 0.030"

1-3/8" – 2" shaft = +/- 0.060"

2-1/2" – 4" shaft = +/- 0.125"



Part No.	Nominal Dia. in.	Dia. Tolerance Class L* in.		Dia. Tolerance Class S* in.		Dia. Tolerance Class N* in.		Max Length in.	Min Hardness Depth in.	Weight Per In. lb.
		MIN	MAX**	MIN	MAX**	MIN	MAX*			
NI* 03-xxx.xxx	3/16"	0.1865	0.1870	–	–	–	–	252	0.027	0.008
NI* 04-xxx.xxx	1/4"	0.2490	0.2495	0.2485***	0.2490***	0.2498***	0.2500***	252	0.027	0.014
NI* 06-xxx.xxx	3/8"	0.3740	0.3745	0.3735***	0.3740***	0.3748***	0.3750***	252	0.027	0.031
NI* 08-xxx.xxx	1/2"	0.4990	0.4995	0.4985	0.4990	0.4998	0.5000	180	0.040	0.055
NI* 10-xxx.xxx	5/8"	0.6240	0.6245	0.6235	0.6240	0.6248	0.6250	180	0.040	0.086
NI* 12-xxx.xxx	3/4"	0.7490	0.7495	0.7485	0.7490	0.7498	0.7500	180	0.060	0.125
NI* 14-xxx.xxx	7/8"	0.8740	0.8745	–	–	0.8748	0.8750	180	0.060	0.170
NI* 16-xxx.xxx	1"	0.9990	0.9995	0.9985	0.9990	0.9998	1.0000	180	0.080	0.222
NI* 18-xxx.xxx	1-1/8"	1.1240	1.1245	–	–	1.1248	1.1250	180	0.080	0.281
NI* 20-xxx.xxx	1-1/4"	1.2490	1.2495	1.2485	1.2490	1.2498	1.2500	180	0.080	0.348
NI* 22-xxx.xxx	1-3/8"	1.3740	1.3745	–	–	1.3747	1.3750	180	0.080	0.420
NI* 24-xxx.xxx	1-1/2"	1.4989	1.4994	1.4984	1.4989	1.4997	1.5000	180	0.080	0.500
NI* 28-xxx.xxx	1-3/4"	1.7490	1.7495	–	–	1.7497	1.7500	180	0.100	0.681
NI* 32-xxx.xxx	2"	1.9987	1.9994	1.9980	1.9987	1.9997	2.0000	180	0.100	0.890
NI* 40-xxx.xxx	2-1/2"	2.4985	2.4993	2.4977	2.4985	2.4996	2.5000	180	0.100	1.391
NI* 48-xxx.xxx	3"	2.9983	2.9992	2.9974	2.9983	2.9996	3.0000	180	0.100	2.003
NI* 64-xxx.xxx	4"	3.9976	3.9988	–	–	–	–	140	0.100	3.560

*Third letter of Part No. reflects the shaft class
(NIL for Class L, NIS for Class S, and NIN for Class N).

**MAX length subject to change.

***1/4" and 3/8" shafting are available in class S and N for volume requests only.

Notes: (1) Specify length in part number using inches.

(2) Example: for 1/2" class T shafting total length 15" = NIL08-015.000

(3) Surface finish bearing recommended 8–10 Ra.

440 & 420 Stainless Steel Solid Shafting NI_SS & NI_SS420

Part No.		Nominal Dia. in.	Dia. Tolerance Class L in.		Dia. Tolerance Class S* in.		Max Length in.	Min Hardness Depth in.	Weight Per In. lb.
440 SS	420 SS		MIN	MAX	MIN	MAX**			
NI* 03SS-xxx.xxx	NI* 03SS420-xxx.xxx	3/16"	0.1865	0.1870	N/A	N/A	252	0.027	0.008
NI* 04SS-xxx.xxx	NI* 04SS420-xxx.xxx	1/4"	0.2490	0.2495	0.2485***	0.2490***	252	0.027	0.014
NI* 06SS-xxx.xxx	NI* 06SS420-xxx.xxx	3/8"	0.3740	0.3745	0.3735***	0.3740***	252	0.027	0.031
NI* 08SS-xxx.xxx	NI* 08SS420-xxx.xxx	1/2"	0.4990	0.4995	0.4985	0.4990	154	0.040	0.055
NI* 10SS-xxx.xxx	NI* 10SS420-xxx.xxx	5/8"	0.6240	0.6245	0.6235	0.6240	154	0.040	0.087
NI* 12SS-xxx.xxx	NI* 12SS420-xxx.xxx	3/4"	0.7490	0.7495	0.7485	0.7490	154	0.060	0.125
NI* 16SS-xxx.xxx	NI* 16SS420-xxx.xxx	1"	0.9990	0.9995	0.9985	0.9990	176	0.080	0.222
NI* 20SS-xxx.xxx	NI* 20SS420-xxx.xxx	1-1/4"	1.2490	1.2495	1.2485	1.2490	154	0.080	0.348
NI* 24SS-xxx.xxx	NI* 24SS420-xxx.xxx	1-1/2"	1.4989	1.4994	1.4984	1.4989	154	0.080	0.498
NI* 32SS-xxx.xxx	NI* 32SS420-xxx.xxx	2"	1.9987	1.9994	1.9980	1.9987	154	0.100	0.886

*Third letter of Part No. reflects the shaft class (NIL for Class L, NIS for Class S, and NIN for Class N).

**MAX length subject to change.

***1/4" and 3/4" shafting are available in class S for volume requests only.

440 & 420 stainless steel
RC 50 Plus™ hardness

Optimized for Simplicity bearings
and linear ball bearings

Available cut-to-length or
random lengths

Length tolerance:

3/16" – 1-1/4" shaft = +/- 0.030"

1-3/8" – 2" shaft = +/- 0.060"

2-1/2" – 4" shaft = +/- 0.125"



Email an Application Engineer

Pre-Drilled & Tapped

Steel **NIPDL** • 440 Stainless Steel **NIPDLxxSS** • 420 Stainless Steel **NIPDLxxSS420** • 316 Stainless Steel **NIPDLxxSS316**

Part No.				Nominal Dia. in.	Dia. Tolerance Class L in.		Standard Hole Spacing		Thread	Max Length in.	Weight Per Inch lb.
Steel	440 SS	420 SS	316 SS		MIN	MAX	X	Y			
NIPDL08	NIPDL08SS	NIPDL08SS420	NIPDL08SS316	1/2"	0.4990	0.4995	4	2	6-32	144	0.055
NIPDL10	NIPDL10SS	NIPDL10SS420	NIPDL10SS316	5/8"	0.6240	0.6245	4	2	8-32	144	0.086
NIPDL12	NIPDL12SS	NIPDL12SS420	NIPDL12SS316	3/4"	0.7490	0.7495	6	3	10-32	144	0.125
NIPDL16	NIPDL16SS	NIPDL16SS420	NIPDL16SS316	1"	0.9990	0.9995	6	3	1/4-20	144	0.222
NIPDL20	NIPDL20SS	NIPDL20SS420	NIPDL20SS316	1-1/4"	1.2490	1.2495	6	3	5/16-18	144	0.348
NIPDL24	NIPDL24SS	NIPDL24SS420	NIPDL24SS316	1-1/2"	1.4989	1.4994	8	4	3/8-16	132	0.500
NIPDL32	NIPDL32SS	NIPDL32SS420	NIPDL32SS316	2"	1.9987	1.9994	8	4	1/2-13	132	0.890
NIPDL48	*	*	*	3"	2.9983	2.9992	8	4	3/4-10	132	2.003

Part Numbers are complete when Length and Type are added.


Example: Complete Part Number for a 1 inch diameter 440 Stainless Steel shaft of 24 inches = NIPDL16SS-024.000-SL

*Special orders available on this option.

Notes: (1) Specify length in part number using inches. **Example:** 1/2" shafting at a length of 15" = NIPDL08-015.000

(3) Customer specifies 'y' dimension, if different than standard. Hole-to-hole tolerance = +/-0.015".


(4) Consult factory for chrome plated or 303 stainless steel shafting.

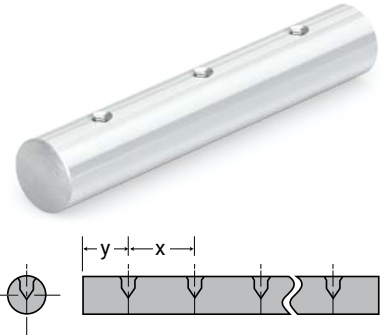

Ceramic Coated

- Aluminum alloy base material
- Optimized for FrelonGOLD® liners
- Interchanges with solid and pre-drilled shafting
- Non-magnetic and vibration resistant
- Weld splatter, paints, and contaminants will not stick
- Ceramic-like coating provides hardness up to RC70 and increased corrosion resistance
- NOT to be used with linear ball bearings (*Does not apply to linear guide products – MR, UG, UGA, etc*)
- NOT compatible with linear ball bearings or roller pillow block assemblies

Length tolerance: 3/16" – 1-1/4" shaft = +/- 0.030"
1-3/8" – 2" shaft = +/- 0.060"
2-1/2" – 4" shaft = +/- 0.125"

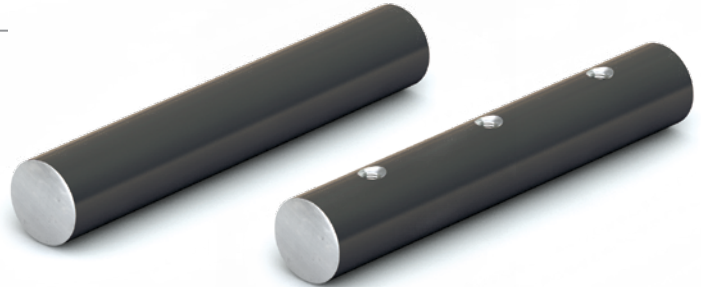

Solid Shafting CC

Part No.	Nominal Dia. in.	Diameter Tolerance		MAX Length in.	Weight lb./in.
		MIN	MAX		
CC03-xxx.xxx	3/16"	0.1863	0.1871	138	0.003
CC04-xxx.xxx	1/4"	0.2488	0.2496	138	0.005
CC06-xxx.xxx	3/8"	0.3738	0.3746	138	0.010
CC08-xxx.xxx	1/2"	0.4988	0.4996	138	0.019
CC10-xxx.xxx	5/8"	0.6238	0.6246	138	0.030
CC12-xxx.xxx	3/4"	0.7488	0.7496	138	0.043
CC16-xxx.xxx	1"	0.9988	0.9996	138	0.077
CC20-xxx.xxx	1-1/4"	1.2488	1.2496	138	0.120
CC24-xxx.xxx	1-1/2"	1.4987	1.4995	138	0.173
CC32-xxx.xxx	2"	1.9985	1.9995	138	0.308

Notes: (1) Specify length in part number using inches.

Example: 1/2" shafting total length 36" long = CC08-036.000.

(2) Ends of cut-to-length shafting are not coated.

(3) Fully coated shafting is available on special request.

Pre-Drilled & Tapped CCPDL

Part No.	Nominal Dia. in.	Diameter Tolerance		Standard Hole Spacing		Thread	MAX Length in.	Weight lb./in.
		MIN	MAX	X	Y			
CCPDL08-xxx.xxx	1/2"	0.4988	0.4996	4	2	6-32	138	0.019
CCPDL10-xxx.xxx	5/8"	0.6238	0.6246	4	2	8-32	138	0.030
CCPDL12-xxx.xxx	3/4"	0.7488	0.7496	6	3	10-32	138	0.043
CCPDL16-xxx.xxx	1"	0.9988	0.9996	6	3	1/4-20	138	0.077
CCPDL20-xxx.xxx	1-1/4"	1.2488	1.2496	6	3	5/16-18	138	0.120
CCPDL24-xxx.xxx	1-1/2"	1.4987	1.4995	8	4	3/8-16	138	0.173
CCPDL32-xxx.xxx	2"	1.9985	1.9995	8	4	1/2-13	138	0.308

Notes: (1) Specify length in part number using inches.

Example: 1/2" shafting total length 36" long = CCPDL08-036.000.

(2) Ends of cut-to-length shafting are not coated.

(3) Fully coated shafting is available on special request.

(4) Counterbore 0.063" from top.

(5) Customer specifies 'y' dimension, if different than standard.


Shafting End Support Blocks

Aluminum End Support Block **NSB**

End support blocks can be used for end or intermittent shaft support. The aluminum end support block is lightweight and strong, and can be used with all shaft types. Ideally, they should be used where deflection between supports is not a problem.


Available in inch sizes from 1/4" - 2"

Instant bolt-down installation

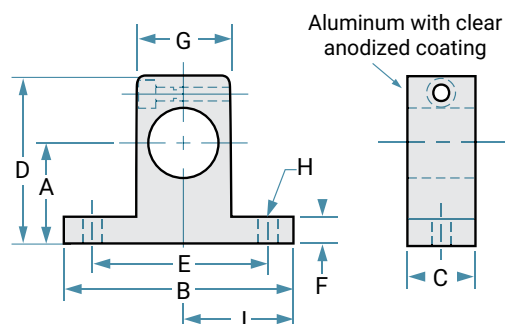

Part No.	Nominal Dia. in.	A +/- 0.001	B	C	D	E +/- 0.001	F	G	H Bolt	Hole	I +/- 0.001	Weight lb.
NSB04	1/4"	0.687	1.500	0.500	1.050	1.125	0.250	0.500	#6	5/32"	0.750	0.038
NSB06	3/8"	0.750	1.625	0.563	1.175	1.250	0.250	0.688	#6	5/32"	0.800	0.044
NSB08	1/2"	1.000	2.000	0.625	1.625	1.500	0.250	0.875	#8	3/16"	1.000	0.079
NSB10	5/8"	1.000	2.500	0.688	1.750	1.875	0.313	1.000	#10	7/32"	1.250	0.112
NSB12	3/4"	1.250	2.500	0.750	2.055	2.000	0.313	1.250	#10	7/32"	1.375	0.148
NSB16	1"	1.500	3.055	1.000	2.500	2.500	0.375	1.500	1/4"	9/32"	1.625	0.313
NSB20	1-1/4"	1.750	3.750	1.125	3.000	3.000	0.438	2.000	5/16"	11/32"	2.000	0.527
NSB24	1-1/2"	2.000	4.375	1.250	3.500	3.500	0.500	2.250	5/16"	11/32"	2.375	0.755
NSB32	2"	2.500	5.500	1.500	4.375	4.500	0.625	3.000	3/8"	13/32"	3.000	1.464

Steel End Support Block **LSB**

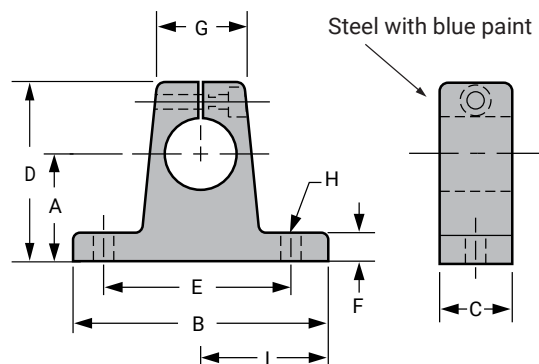


Part No.	Retired Part No.	Nom. Shaft Diameter	A ±0.002	B	C	D	E ±0.005	F	G	H Bolt	Hole	I +/- 0.001	Weight lb.
LSB08	SB-8	1/2	1.000	2.000	0.625	1.625	1.500	0.250	0.750	#10	7/32	1.000	0.270
LSB10	SB-10	5/8	1.000	2.500	0.750	1.750	1.875	0.312	0.875	#10	7/32	1.250	0.400
LSB12	SB-12	3/4	1.250	2.750	0.750	2.125	2.000	0.375	1.000	1/4	9/32	1.375	0.520
LSB16	SB-16	1	1.500	3.312	1.000	2.625	2.500	0.375	1.375	1/4	9/32	1.656	1.110
LSB20	SB-20	1-1/4	1.750	4.000	1.250	3.000	3.000	0.437	1.750	5/16	11/32	2.000	1.910
LSB24	SB-24	1-1/2	2.000	4.750	1.250	3.500	3.500	0.500	2.000	5/16	11/32	2.375	2.520
LSB32	SB-32	2	2.500	6.000	1.500	4.500	5.000	0.625	2.625	3/8	13/32	3.000	5.100
LSB32-4.500	-	2	2.500	6.000	1.500	4.500	4.500	0.625	2.625	3/8	13/32	3.000	5.100

Rail Assembly – Aluminum Support Rail SRA

Two piece assembly RC60 steel shaft and aluminum support rail standard

Other shaft materials – 440, 420, 316 stainless steel, and ceramic coated aluminum

No coating

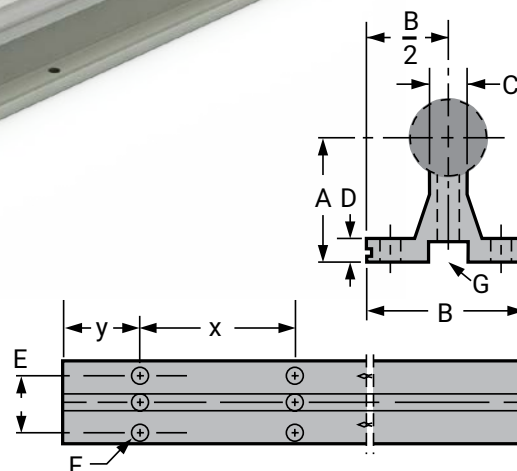

Available cut-to-length, tolerance:

3/16" – 1-1/4" shaft = +/- 0.030"

1-3/8" – 2" shaft = +/- 0.060"

2-1/2" – 4" shaft = +/- 0.125"

Part No.			Nominal Dia. in.	Diameter Tolerance		A +/-0.002	B	C	D	E	F		Standard Hole Spacing		Weight lb./in.
Shaft Size	Material**	Length		MIN	MAX						Bolt	Hole	X	Y	
SRA08	_____	_____SL	1/2	0.4988	0.4996	1.125	1.500	0.250	0.188	1.000	#6	0.169	4	2	0.101
SRA10	_____	_____SL	5/8	0.6238	0.6246	1.125	1.625	0.313	0.250	1.125	#8	0.193	4	2	0.145
SRA12	_____	_____SL	3/4	0.7488	0.7496	1.500	1.750	0.375	0.250	1.250	#10	0.221	6	3	0.202
SRA16	_____	_____SL	1	0.9988	0.9996	1.750	2.125	0.500	0.250	1.500	1/4"	0.281	6	3	0.328
SRA20	_____	_____SL	1-1/4	1.2488	1.2496	2.125	2.500	0.563	0.313	1.875	5/16"	0.343	6	3	0.493
SRA24	_____	_____SL	1-1/2	1.4987	1.4995	2.500	3.000	0.688	0.375	2.250	5/16"	0.343	8	4	0.711
SRA32	_____	_____SL	2	1.9985	1.9995	3.250	3.750	0.875	0.500	2.750	3/8"	0.406	8	4	1.231
SRA48	_____	_____SL	3	2.9983	2.9992	4.000	6.000	1.400	0.750	4.250	3/4"	0.630	8	4	2.641

• Part Numbers are complete when **Material** and **Length** are added.
Default material is 1060 steel when no Material is specified.

For other steel options add below code into **Material location:

CC Ceramic Coated Shafting
SS 440 Stainless Steel
SS420 420 Stainless Steel
SS316 316 Stainless Steel

Note: Specify length in part number using inches.

Example: for 1/2" shafting total length 36" long = SRA08-036.000.

Customer specifies 'y' dimension, if different than standard.

Contact PBC Linear for other available hole patterns.

* For diameter tolerances on Ceramic Coated Shafting, see tables on page 54

Example 1: The Complete Part Number for a 1 inch diameter 440 Stainless Steel shaft of 24 inches is SRA16**SS-024.000**-SL

Example 2: The Complete Part Number for a 3/4 inch diameter 1060 Steel shaft of 18 inches is SRA12**-018.000**-SL

Shafting Rail Assemblies

Simplicity
60 PLUS
SHAFTING


INCH

ISO METRIC


JIS METRIC

Support Rail – Aluminum SR & SR_PD

Non-Drilled (SR)

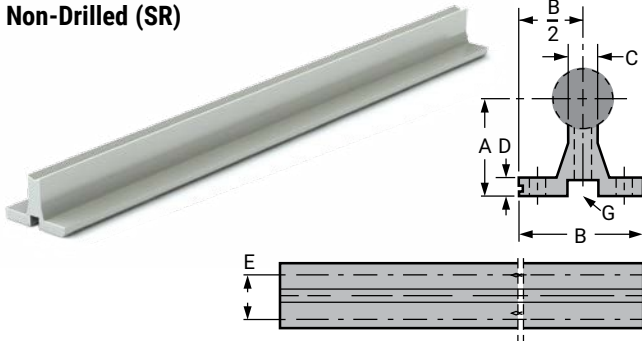

Pre-Drilled (SRxxPD)

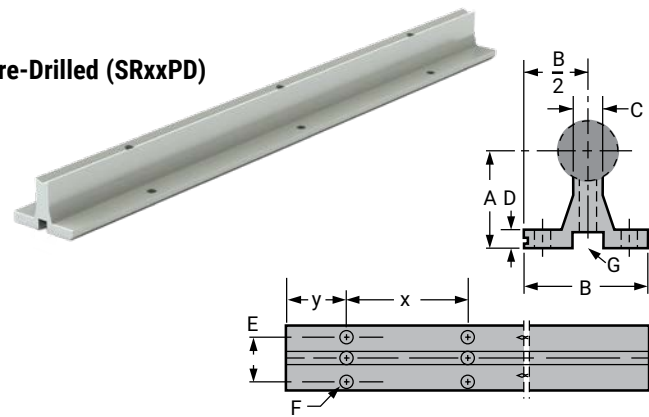

Part No.		Nominal Dia.	A					Standard Hole Spacing		G Recommended Mounting Hole Size			MAX Length	Weight
Non-Drilled	Pre-Drilled	In.	+/-0.002	B	C	D	E	X	Y	Hole	Screw	Fastener Length	+0/-0.125	Lb./in.
SR08-xxx.xxx	SR08PD-xxx.xxx	1/2"	1.125	1.500	0.250	0.188	1.000	4	2	0.169	6-32 x 7/8"	7/8"	48	0.048
SR10-xxx.xxx	SR10PD-xxx.xxx	5/8"	1.125	1.625	0.313	0.250	1.125	4	2	0.193	8-32 x 7/8"	7/8"	48	0.059
SR12-xxx.xxx	SR12PD-xxx.xxx	3/4"	1.500	1.750	0.375	0.250	1.250	6	3	0.221	10-32 x 7/8"	7/8"	48	0.080
SR16-xxx.xxx	SR16PD-xxx.xxx	1"	1.750	2.125	0.500	0.250	1.500	6	3	0.281	1/4-20 x 1-1/2"	1-1/2"	48	0.106
SR20-xxx.xxx	SR20PD-xxx.xxx	1-1/4"	2.125	2.500	0.563	0.313	1.875	6	3	0.343	5/16-18 x 1-3/4"	1-3/4"	48	0.146
SR24-xxx.xxx	SR24PD-xxx.xxx	1-1/2"	2.500	3.000	0.688	0.375	2.250	8	4	0.406	3/8-16 x 2"	2"	48	0.211
SR32-xxx.xxx	SR32PD-xxx.xxx	2"	3.250	3.750	0.875	0.500	2.750	8	4	0.531	1/2-13 x 2-1/2"	2-1/2"	48	0.354
SR48-xxx.xxx	SR48PD-xxx.xxx	3	4.000	6.000	1.400	0.750	4.250	8	4	0.625	3/4-10 x 3-1/4"	3"	48	0.649

Notes: (1) Specify length in part number. **Example:** 1/2" shafting support rail to 24" length = SR08-024.000 (Aluminum alloy construction, no coating).

(2) Shafts and support rails sold separately. Customer specifies 'y' dimension. Shaft rails and assemblies are available in long lengths, consult factory.

(3) **Contact PBC Linear for other available hole patterns.**

Rail Assembly – Ceramic Coated CCR

Ceramic-like coating provides hardness up to RC70 and increased corrosion resistance

Optimized for FrelonGOLD® liners

NOT to be used with linear ball bearings

(Does not apply to linear guide products – MR, UG, UGA, etc)


Economical, lightweight alternative to traditional steel shafting

One-piece integrated design eliminates assembly time

Weld splatter, paints, and contaminants will not stick

Non-magnetic and vibration resistant

Pre-drilled with standard X hole spacing*

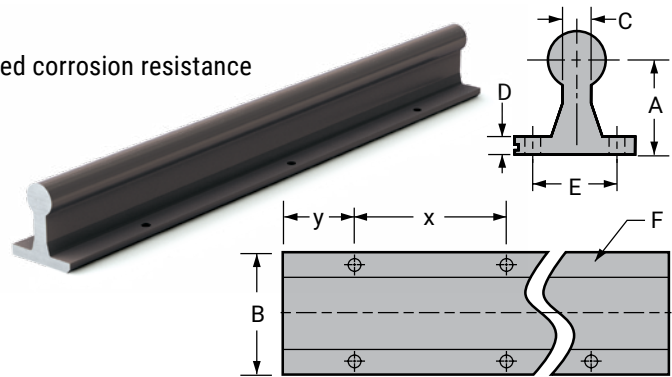

Part No.	Nominal Dia.	Diameter Tolerance		A	B	C	D	E	F		Standard Hole Spacing		MAX Length	Weight
	in.	MIN	MAX	+/-0.002					Bolt	Hole	X	Y	in.	Lb./in.
CCR08-xxx.xxx	1/2	0.4988	0.4996	1.125	1.500	0.250	0.188	1.000	#6	0.169	4	2	120	0.067
CCR10-xxx.xxx	5/8	0.6238	0.6246	1.125	1.625	0.313	0.250	1.125	#8	0.193	4	2	120	0.089
CCR12-xxx.xxx	3/4	0.7488	0.7496	1.500	1.750	0.375	0.250	1.250	#10	0.221	6	3	120	0.123
CCR16-xxx.xxx	1	0.9988	0.9996	1.750	2.125	0.500	0.250	1.500	1/4"	0.281	6	3	120	0.187
CCR20-xxx.xxx	1-1/4	1.2488	1.2496	2.125	2.500	0.563	0.313	1.875	5/16"	0.343	6	3	120	0.287
CCR24-xxx.xxx	1-1/2	1.4987	1.4995	2.500	3.000	0.688	0.375	2.250	5/16"	0.343	8	4	120	0.416
CCR32-xxx.xxx	2	1.9985	1.9995	3.250	3.750	0.875	0.500	2.750	3/8"	0.406	8	4	120	0.691

Notes: (1) Specify length in part number using inches.

Example: 1/2" shafting total length 36" long = CCR08-036.000.

(2) Cut-to-length rails may not be coated on the ends.

(3) **Contact PBC Linear for other available hole patterns.**

DO NOT use with linear ball bearings or roller pillow block assemblies.

*Customer specified 'Y' dimension.


Shafting Low Support Rails

Low Support Rail – Steel LSR

The AISI C-1018 steel LSR shaft support is a low support rail with a reduced footprint, and 40% lower profile than other support rails. This is an excellent choice for applications requiring compact low shaft support. The standard length for LSR type supports is 48".

No coating


Length tolerance +0", -1/8".



Part No.	Assembly Part No.	Shaft Dia. in.	A +/-0.002	B +/-0.005	C (Ref)	D		Hole Spacing For LSR-Pd Pre-Drilled		Weight Per 48" (Approximate) lb. +/-0.001	Assembly Weight Per 48" (Approximate) lb. +/-0.001
						Bolt	Hole	Y	X		
LSR-8	LSRA-8	1/2	0.562	0.370	0.341	6-32	0.169	2	4	1.320	3.960
LSR-10	LSRA-10	5/8	0.687	0.450	0.412	8-32	0.193	2	4	1.950	6.078
LSR-12	LSRA-12	3/4	0.750	0.510	0.420	10-32	0.221	3	6	2.250	8.250
LSR-16	LSRA-16	1	1.000	0.690	0.560	1/4-20	0.281	3	6	4.250	14.910
LSR-20	LSRA-20	1-1/4	1.187	0.780	0.626	5/16-18	0.343	3	6	5.080	21.780
LSR-24	LSRA-24	1-1/2	1.375	0.930	0.703	3/8-16	0.406	4	8	6.720	30.720
LSR-32	LSRA-32	2	1.750	1.180	0.845	1/2-13	0.531	4	8	11.000	53.720
LSR-48	LSRA-48	3	2.750	1.875	1.404	3/4-10	0.812	4	8	27.920	124.060

How to order

- Available as cut to length options up to a max length of 144".
Example: 48" would be LSR12-048.000-SL
- If standard mounting holes are required, specify low shaft rails with pre-drilled mounting holes by part number. For example, LSR-12-PD. Hole sizes and spacings are shown in the table.
- If other than standard hole spacing is required, please provide drawings with all dimensions, tolerances, and quantity. With or without mounting holes, low shaft rails will be supplied in 48" lengths when ordered by part number.

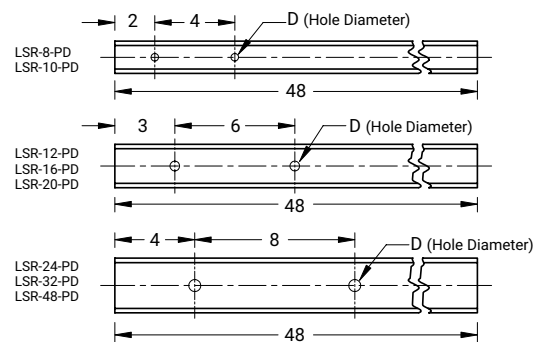

Low Support Rail & Shaft Set LSG


Precision case hardened and ground shaft, plus an LSR steel support rail, effectively doubles the life of the shaft by allowing it to be turned over for a fresh surface when wear becomes evident. Both sides of the shaft are counterbored so the shaft may be rotated 180°, and rebolted for use on the new side. This guide is sold as a two-piece set; the shaft and support are not assembled. The guide is then bolted down through the top of the shaft to reduce installation time. The shafts are also available in 400 series stainless steel. Drilled through and counterbored shafts may not be suitable for all linear bearings.

No coating



Part No.	Shaft Dia. in.	H in.	B in.	Y in.	X in.	N in.	Weight Per in. lb.
LSG-10	5/8	0.687	0.450	2	4	#5	0.132
LSG-12	3/4	0.750	0.510	3	6	#6	0.171
LSG-16	1	1.000	0.690	3	6	#10	0.311
LSG-20	1-1/4	1.187	0.780	3	6	5/16	0.454
LSG-24	1-1/2	1.375	0.930	4	8	3/8	0.640
LSG-32	2	1.750	1.180	4	8	1/2	1.119

Note: Customer specifies 'y' dimension.

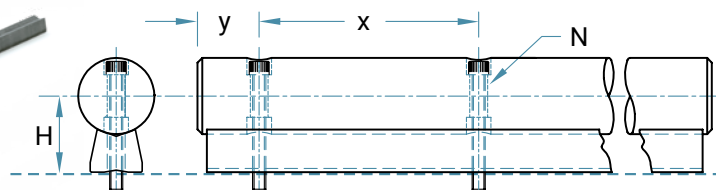

Custom Machining Options for Shafts

[Configure Now](#)



Special Machining

Standard 60 Plus shafting, which is available from stock, can be cut with special length tolerances. 60 Plus shafting may also be drilled with a variety of radial holes and tapped if needed. Shafts can be supplied with flats, keyways, and reduced diameters. Shafts can also be plated.

There is an extra charge for all special machining operations. For specific prices, send your drawing or technical description to PBC Linear.

Special Length Tolerances

Standard length tolerances for shafting are:


< 1 1/4" diameter	$\pm 1/32"$ ($\pm 0.03"$)
1 3/8"–2" diameter	$\pm 1/16"$ ($\pm 0.06"$)
> 2" diameter	$\pm 1/8"$ ($\pm 0.125"$)

All SR, LSR, SRA, LSRA, and CCR are $+0.000"/-0.125"$. Contact us with special requirements.

Special Straightness Tolerances

PBC Linear standard length tolerances are 0.001 to 0.002"/ft cumulative. Except for 3/8" diameters and less. Contact us with special requirements.

Standard Chamfers



Diameter	Size	Tolerance
$\leq 3/8"$	Break Edge	$\pm 0.005\text{--}0.010" \times 45^\circ$
10 mm–7/8"	$1/32" \times 45^\circ$	$\pm 0.005"$
1"–2"	$1/16" \times 45^\circ$	$\pm 0.010"$
2 1/2"–3"	$1/8" \times 45^\circ$	$\pm 0.010"$

Special chamfer at any angle can be supplied for an additional charge.


Machining Shaft Ends

Certain complex machined ends may require annealing. Consult the factory on whether annealing is needed for your custom machined end. Customer must specify if they want to forgo the annealing for their custom machined end.

Contact the factory for special options.

Radial Holes Drilled and Tapped to Center of Shaft


U.N.C. or U.N.F.
Class 2-B thread.



Hole to Hole	$\pm 0.010"$ Non-Accum
Hole to Centerline	$\pm 0.0075"$
Hole to End	$\pm 0.030"$ (± 0.06 mm)

Note: Hole depth full threads to 1/2" of the shaft diameter.

Radial Holes Drilled and Tapped through Shaft



Radial Holes Drilled through Shaft



Hole Diameter	$\pm 0.005"$
Hole to Hole	$\pm 0.010"$ Non-Accum
Hole to Centerline	$\pm 0.0075"$
Hole to End	$\pm 0.030"$

Radial Holes Drilled and Reamed through Shafts



Hole Diameter	$\pm 0.001"$
Hole to Hole	$\pm 0.010"$ Non-Accum
Hole to Centerline	$\pm 0.0075"$
Hole to End	$\pm 0.030"$

Threaded Shaft Diameter

Standard threads are either Unified National Coarse or Unified National Fine, Class 2-A fit. Shafts will be annealed and soft around the circumference of threaded areas within the case



Standard Threads	UNC or UNF Class 2-A
------------------	----------------------

Note: Threading area will be annealed and soft.

Custom Machining Options for Shafts


INCH

ISO METRIC

JIS METRIC

Reduced Shaft Diameter

Standard diameter tolerances on turned down diameters are $\pm 0.001"$. Special tolerances of $\pm 0.0001"$ are available. Runout is within 0.001" total indicator reading. Two-step shaft diameter reduction is also available.

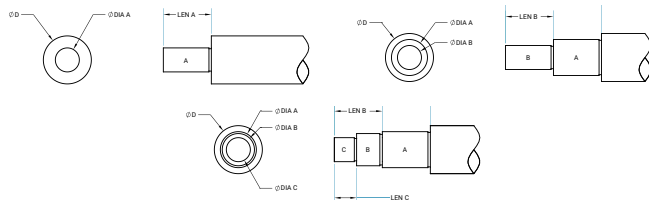

Normal Tolerance	$\pm 0.001"$
Concentricity	$\pm 0.002"$ MAX T.I.R.

Coaxial Holes Drilled and Tapped in Center of End of Shaft



Concentricity	0.01"
Diameter of Holes	$\pm 0.006"$
Bored Holes	$\pm 0.001"$
Bolt Circles	$\pm 2^\circ$
Coaxial on Both Ends	OAL $\pm 0.015"$
Axial on One End	OAL $\pm 0.030"$

Note: Depth is twice the diameter of the tap minimum.

Dowel Joints




Match over joint of 0.002 Maximum TIR

All Linear Dimensions	$\pm 0.010"$
First Hole	$\pm 0.0075"$
Shaft Diameter	5/8" to 3"

Note: Ends machined square without chamfer.

Retaining Ring Groove



Location Tolerance	$\pm 0.062"$ Standard
	$\pm 0.005"$ Custom

Butted Joints


Ends machined square, no chamfer. Available for all nominal shaft diameters.

Perpendicularity	$\pm 0.001"$ MAX
All Linear Dimensions	$\pm 0.010"$

Note: Ends machined square without chamfer.

Flat(s) on Shaft

Flats are available. Flats extending over large portion of shaft or entire length of shaft are not available. Cutting into hardened layer would cause considerable warping and subsequent straightening costs would be prohibitive.



Location Tolerance	$\pm 0.010"$
--------------------	--------------


Note: Bottom corners of flat will have a 0.030" radius due to manufacturing process.

Keyways

Keyways may be square, flat or American Standard Woodruff. Available for nominal shaft diameters from 1/2" through 4".



Other options available.
Contact us for a quote.

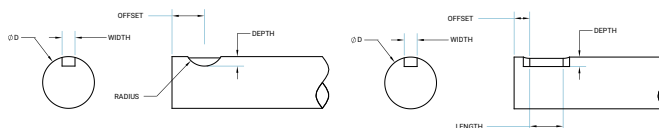

Width	$\pm 0.001"$
Length	$\pm 0.010"$
Linear Locations	$\pm 0.010"$
Location to C/L	$\pm 0.0075"$
Depth	1/2" width + "M" on table 8

Note: Square or American Standard Woodruff.
Maximum length in house is 48".

Simplicity® Square Bearings and Shafting

INCH

ISO METRIC

JIS METRIC

Product Overview


- Runs on a single, square shaft eliminating costly components
- Maintains radial integrity and can eliminate the need for parallel shafting
- Can be mounted in any orientation
- Housings are aluminum alloy with a standard anodized finish
- Utilizes standard bearing plugs
- Adjustable to maintain tight running clearances, contingent upon shafting
- Bearing plugs are easily replaced

Same characteristics of the standard round-way Simplicity bearings:

- Self-lubricating
- High load capacity
- Wide temperature range:
(-400°F/+400°F)
(-240°C/+204°C)
- Excel in contaminated environments
- High shock loading abilities
- Low wear rates



Frelon® Bearing Surface has Angled Slot

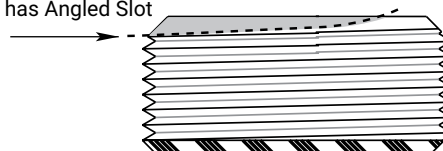


Adjustable Bearing Plugs

Bearing material: Part number APN16E plug with Frelon® J is standard for PST stainless steel square shafting. Part number APN16 plug with FrelonGOLD® is also available for applications to be run on steel. Plug material is 316 stainless steel.

- Bearing plugs can be purchased separately
- Ideal for use in many applications as a wear pad
- Bearing surface area = 0.300 in²
- Max static load capacity per plug (Frelon J)= 450 lb.
- The use of green Loctite or similar is recommended to hold the adjustable bearing plugs in position while allowing relative ease of adjustment

ORDERING INFORMATION

Part No.	Description
APN16E	Standard: Adjustable bearing plug with Frelon J bearing liner. Use with 300 series stainless or soft shafting.
APN16	Optional: Adjustable bearing plug with FrelonGOLD bearing liner. Use with steel shafting.

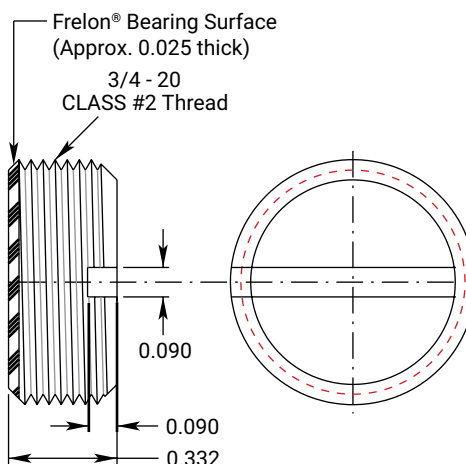

**FrelonGOLD
APN16**





**Frelon J
APN16E**



Simplicity® Square Shafting, Bearings & Plugs

Square Bearing Cutaway View

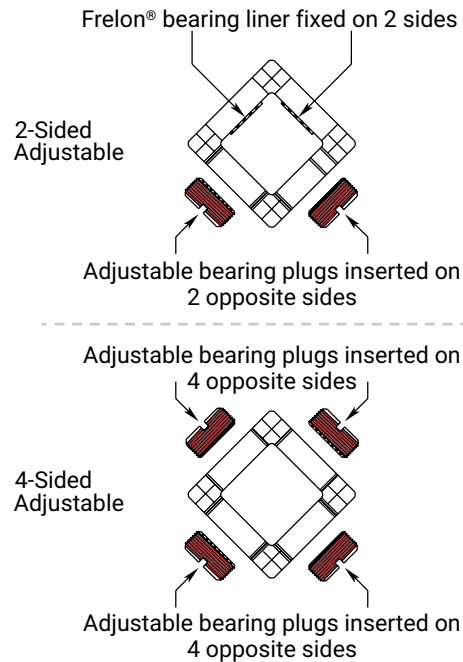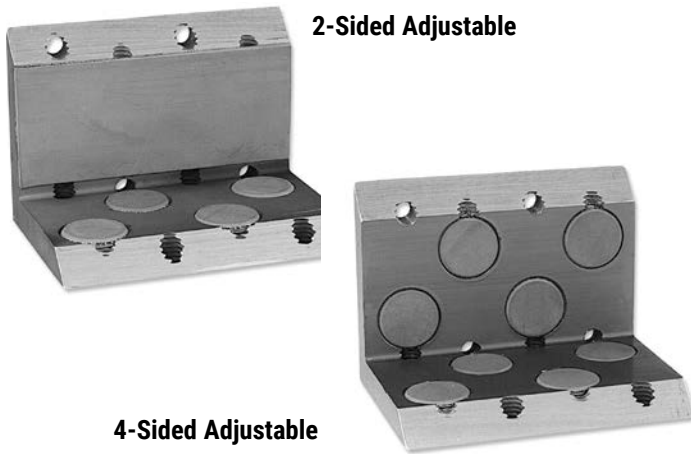

APPLICATION NOTE

Use removable Loctite thread locker to hold the adjustable bearing plugs in position.

Two parameters must be met in the design and use of square bearings:

1. The 2:1 ratio for cantilevered loads applies to square bearings in the same way as roundway Simplicity® bearings. Binding will occur if the ratio is not met.


Note: If only one bearing is used, the 2:1 applies from plug centers.

2. The maximum load and moment load must be met.
To calculate the acceptable cantilever or lever arm, multiply the length (from center of the bearing to the center of the load) times the weight. The result must be less than the moment load for that orientation.

Example: Distance of cantilever = 3"
Amount of load = 40 lb.
3" x 80 lb. = 240 in-lb.

SQUARE BEARING LOAD INFORMATION

Part No.	MAX Moments Torsional Capacities in.-lb.		Max Force lb. F
	Mx	My	
SB16	74	165	920
SBL16	74	475	920
SB24	416	402	1840
SBL24	416	1413	1840

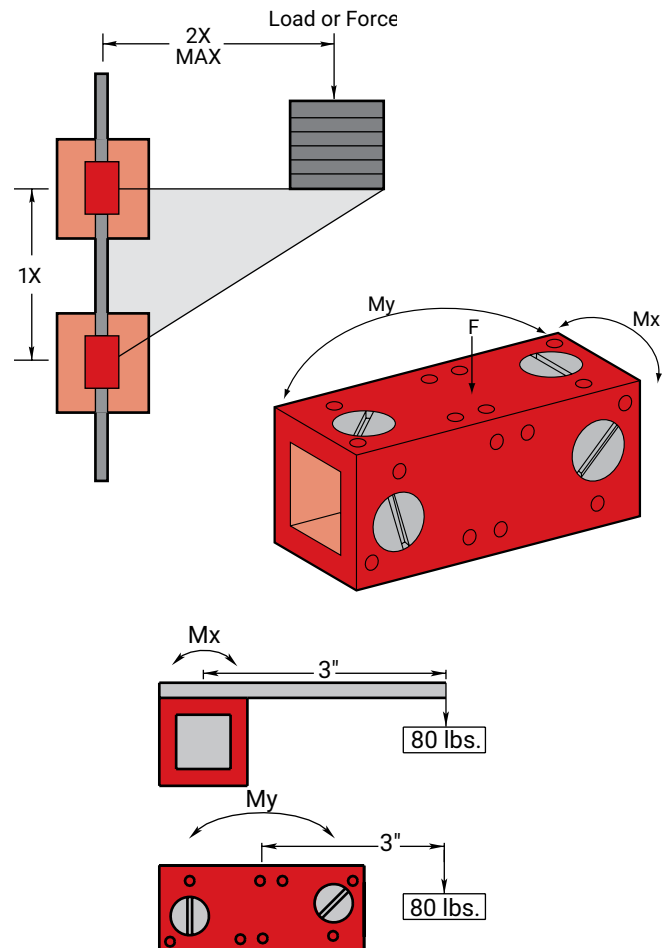

Simplicity® Square Bearings • 1.0 Inch

INCH

ISO METRIC


JIS METRIC

ORDERING INFORMATION

Part No.	Description	Bearing Weight lb.
SB16-2E	Standard 1.0" two-sided adjustable square bearing with Frelon® J plugs for stainless steel shafting.	0.48
SB16-2	Optional 1.0" two-sided adjustable square bearing with FrelonGOLD® plugs for steel shafting.	0.48
SB16-4E	Standard 1.0" four-sided adjustable square bearing with Frelon J plugs for stainless steel shafting.	0.56
SB16-4	Optional 1.0" four-sided adjustable square bearing with FrelonGOLD plugs for steel shafting.	0.56
SBL16-2E	Standard 1.0" extended length, two-sided adjustable square bearing with Frelon J plugs for stainless steel shafting.	0.77
SBL16-2	Optional 1.0" extended length, two-sided adjustable square bearing with FrelonGOLD plugs for steel shafting.	0.77
SBL16-4E	Standard 1.0" extended length, four-sided adjustable square bearing with Frelon J plugs for stainless steel shafting.	0.85
SBL16-4	Optional 1.0" extended length, four-sided adjustable square bearing with FrelonGOLD plugs for steel shafting.	0.85


SB16-2 1.0" 2-sided adjustable square bearing

SB16-4 1.0" 4-sided adjustable square bearing

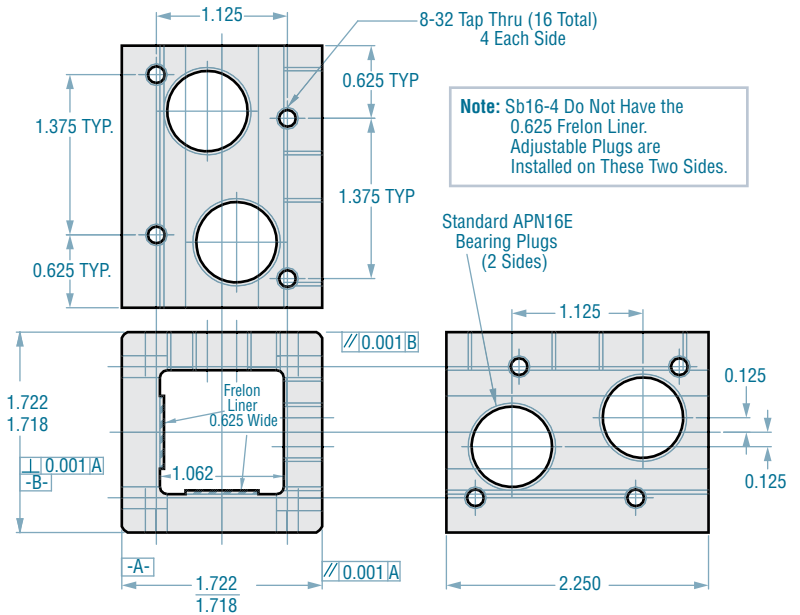

SBL16-2 1.0" Extended length 2-sided adjustable square bearing

SBL16-4 1.0" Extended length 4-sided adjustable square bearing

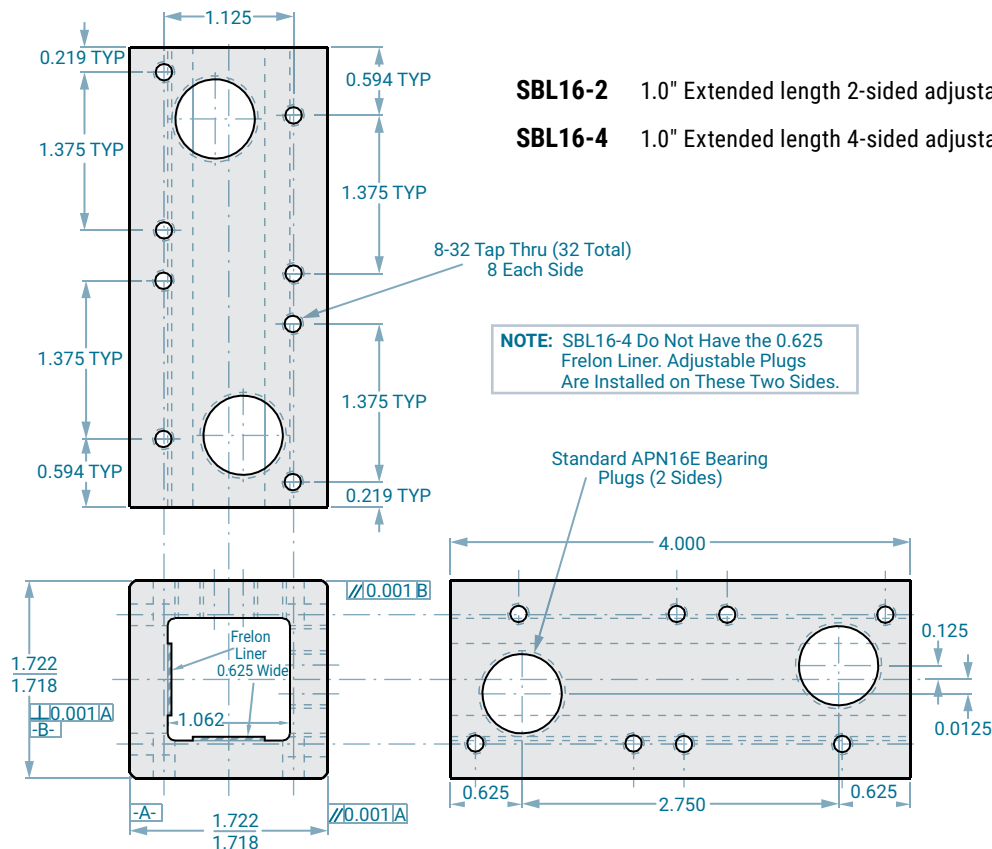


Simplicity® 1.5 Inch • Square Bearings

ORDERING INFORMATION

Part No.	Description	Bearing Weight lb.
SB24-2E	Standard 1.5" two-sided adjustable square bearing with Frelon® J plugs for stainless steel shafting.	0.96
SB24-2	Optional 1.5" two-sided adjustable square bearing with FrelonGOLD® plugs for steel shafting.	0.96
SB24-4E	Standard 1.5" four-sided adjustable square bearing with Frelon J plugs for stainless steel shafting.	1.12
SB24-4	Optional 1.5" four-sided adjustable square bearing with FrelonGOLD plugs for steel shafting.	1.12
SBL24-2E	Standard 1.5" extended length, two-sided adjustable square bearing with Frelon J plugs for stainless steel shafting.	1.71
SBL24-2	Optional 1.5" extended length, two-sided adjustable square bearing with FrelonGOLD plugs for steel shafting.	1.71
SBL24-4E	Standard 1.5" extended length, four-sided adjustable square bearing with Frelon J plugs for stainless steel shafting.	1.84
SBL24-4	Optional 1.5" extended length, four-sided adjustable square bearing with FrelonGOLD plugs for steel shafting.	1.84


SB24-2 1.5" 2-Sided adjustable square bearing

SB24-4 1.5" 4-Sided adjustable square bearing

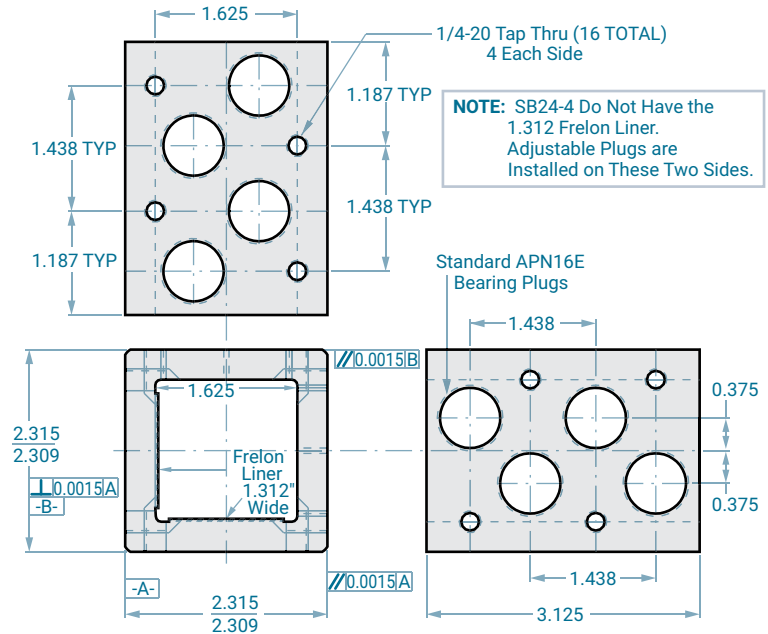

SBL24-2 1.5" Extended length 2-sided adjustable square bearing

SBL24-4 1.5" Extended length 4-sided adjustable square bearing

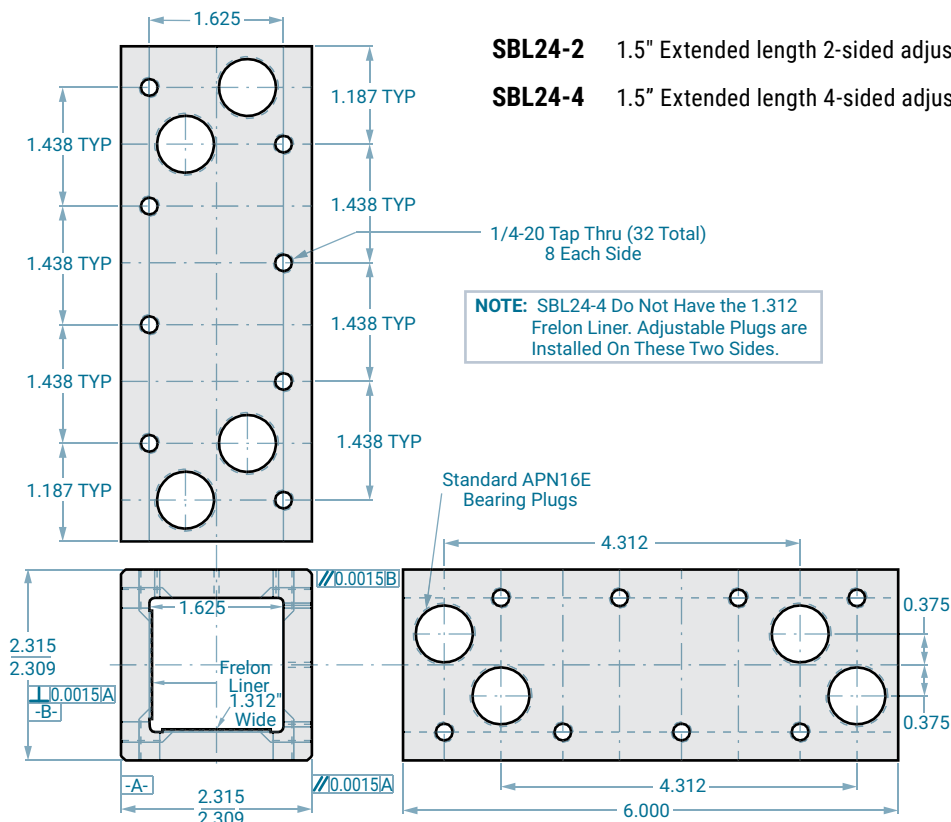

Simplicity® Square Shafting & Accessories

INCH

ISO METRIC

JIS METRIC

Square Shafting

- 304 Stainless steel (standard) is highly corrosion resistant
- Buffed and polished to provide an excellent running surface for Frelon® J
- Both 1" and 1.5" available cut to any length up to 20 feet
- Wall thickness is $\approx 0.120"$

Part No.	Description	Weight lb./in.
PST16-xxx.xxx	Standard 1.0" 304 stainless steel square shafting.	0.12
PST24-xxx.xxx	Standard 1.5" 304 stainless steel square shafting.	0.18

Note: Specify length in part number using inches.
Example: for 1.0" shafting total length 15" = PST16-015.000.

Steel Shafting PST

Specify length in inches




Mounting Accessories

All mounting accessories are made from cast 356-T6 aluminum for good strength and corrosion resistance.



Square Clamp PFL

Includes: 2 M6 x 1 Hex head bolts

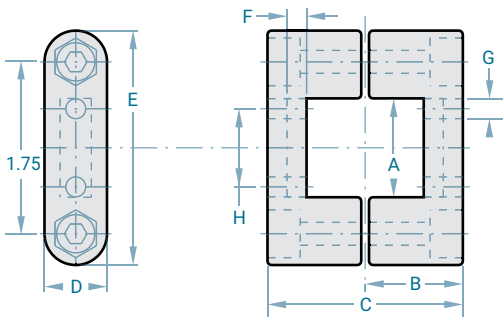

PART NO.	A	B	C	D	E	F	G	H
PFL1000	1.00	0.984	1.968	0.630	2.362	0.197	0.200	0.787
PFL1500	1.50	1.338	2.677	0.787	2.953	0.276	0.256	1.024

Cross Mount PXM1515

1-1/2" only






Cross Mount Round & Square PXM1515

1-1/2" only






Flange Base PBH1000



PBH1000


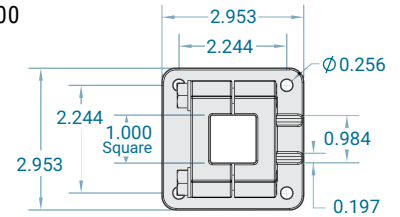


Flange Base PBH1500

PBH1500


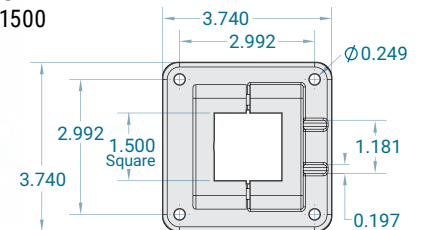


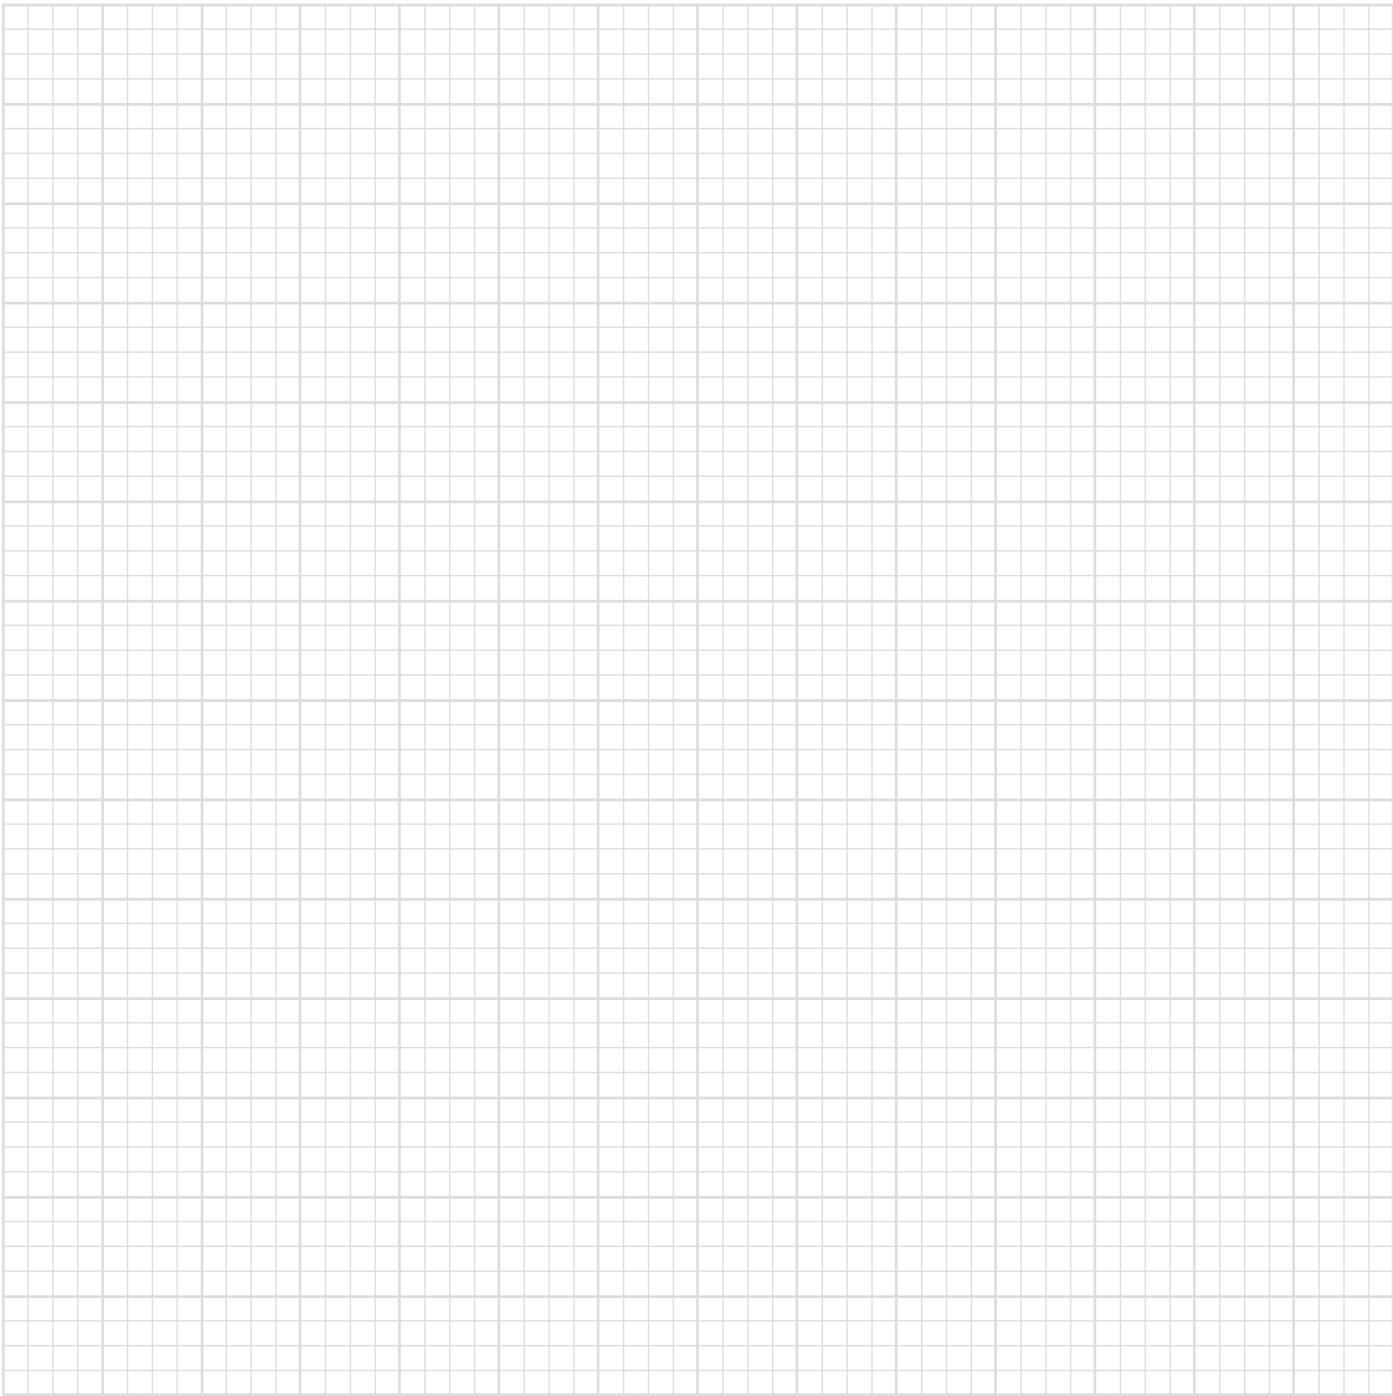

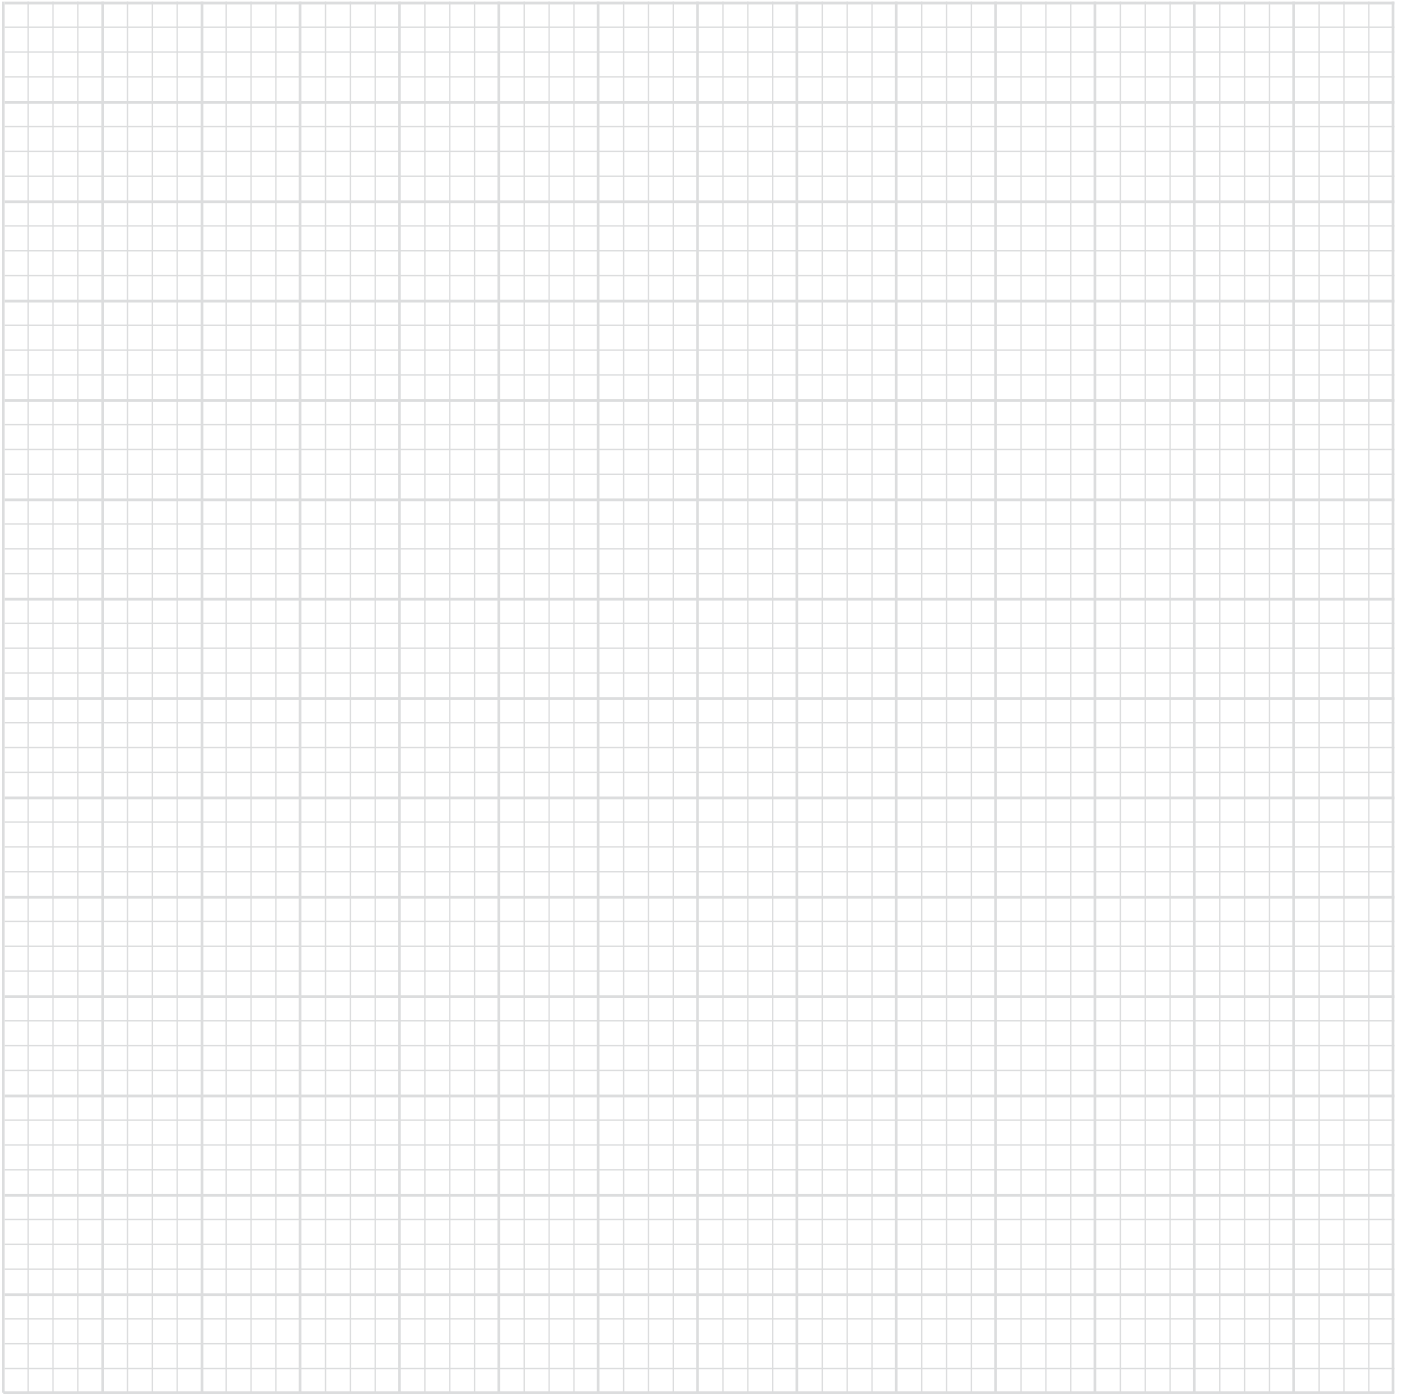

EconoGlide™ Linear Plain Bearings

Linear Plain Bearings IBM & IBMN

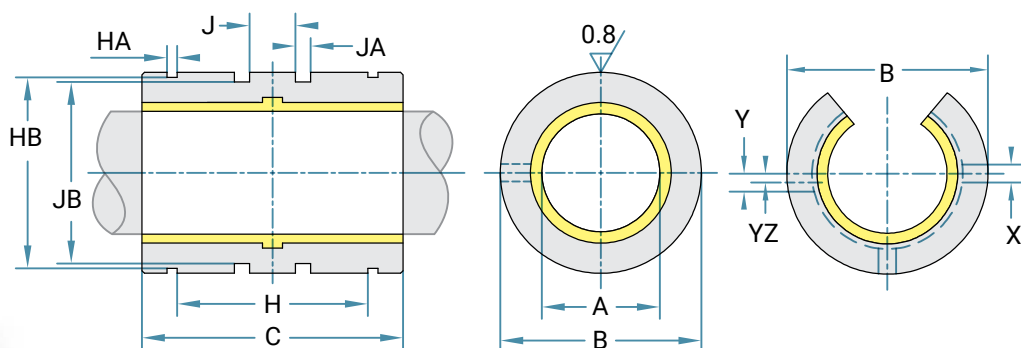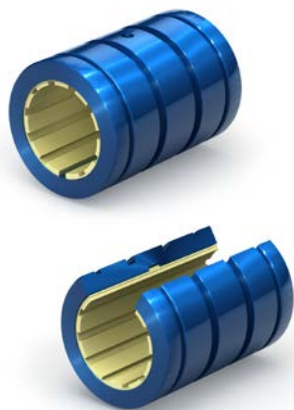

DIMENSIONAL INFORMATION


Standard I.D. Series Similar to Preloaded Ball Bearing					B		C		MAX Static Load	Bearing Weight	
Part No.		Nominal Size	A Bearing I.D. F8							Closed	Open
Closed	Open	mm	MIN	MAX	MIN	MAX	MIN	MAX	N	Kg.	Kg.
IBM10-01	IBMN10-01	10	10.030	10.088	18.979	19	28.619	29	5,075	0.012	0.009
IBM12-01	IBMN12-01	12	12.030	12.088	21.979	22	31.619	32	6,720	0.020	0.015
IBM16-01	IBMN16-01	16	16.030	16.088	25.979	26	35.619	36	10,080	0.028	0.021
IBM20-01	IBMN20-01	20	20.030	20.091	31.975	32	44.619	45	15,750	0.050	0.037
IBM25-01	IBMN25-01	25	25.030	25.091	39.975	40	57.619	58	25,375	0.104	0.075
IBM30-01	IBMN30-01	30	30.040	30.110	46.975	47	67.619	68	35,700	0.163	0.122
IBM40-01	IBMN40-01	40	40.040	40.115	61.970	62	79.619	80	56,000	0.341	0.256
IBM50-01	IBMN50-01	50	50.050	50.130	74.970	75	99.619	100	87,500	0.589	0.442

MOUNTING DIMENSIONS

Part No.		Nominal Size	H	HA	HB	Ret. Ring	J	JA	JB	Metric O'ring Size
Closed	Open		Between Ret. Rings	Ret. Ring GRV. Width	Ret. Ring GRV. Dia.	Part No. Din 471	Between O'ring GRVS.	O'ring GRV. Width	O'ring GRV. Dia.	
IBM10-01	IBMN10-01	10	19.4	1.32	18.0	19	5.63	2.44	15.7	15.5 x 2
IBM12-01	IBMN12-01	12	20.0	1.32	21.0	22	6.00	3.17	17.9	17.5 x 2.5
IBM16-01	IBMN16-01	16	22.0	1.32	24.9	26	8.00	3.17	21.9	21.5 x 2.5
IBM20-01	IBMN20-01	20	28.0	1.63	30.3	32	10.00	3.17	27.9	27.5 x 2.5
IBM25-01	IBMN25-01	25	40.0	1.90	37.5	40	12.50	3.17	35.9	35.5 x 2.5
IBM30-01	IBMN30-01	30	48.0	1.90	44.5	47	15.00	3.17	42.7	42.52 x 2.62
IBM40-01	IBMN40-01	40	56.0	2.20	59.0	62	20.00	4.10	56.3	56 x 3.5
IBM50-01	IBMN50-01	50	72.0	2.70	72.0	75	25.00	4.10	69.2	69 x 3.5

EconoGlide™ Linear Plain Bearings

Linear Plain Bearings IBMN

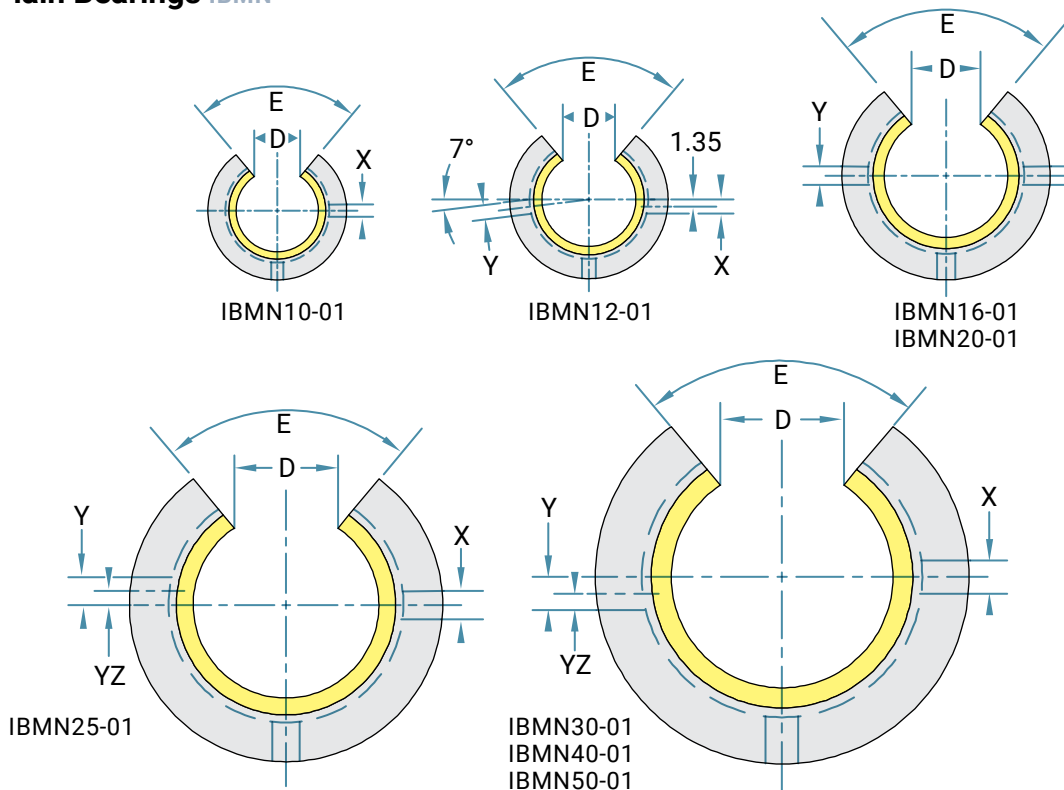

OPEN DIMENSIONAL INFORMATION

Part No.	Nominal Size mm	D Slot Wide MIN	E Slot Angle	X Ret. Hole Dia.	Y Ret. Hole Dia.	Yz Ret. Hole Locate
IBMN10-01	10	6.4	60	3.0	N/A	N/A
IBMN12-01	12	7.6	78	3.0	3.0	0
IBMN16-01	16	10.4	78	2.2	3.0	0
IBMN20-01	20	10.8	60	2.2	3.0	0
IBMN25-01	25	13.2	60	3.0	3.0	1.5
IBMN30-01	30	14.2	72	3.0	3.0	2.0
IBMN40-01	40	19.5	72	3.0	3.0	1.5
IBMN50-01	50	24.0	72	3.0	5.0	2.5



Plain Bearing Accessories:
Retaining Rings, Seals, O-Rings—page 31




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

INCH


ISO METRIC

JIS METRIC

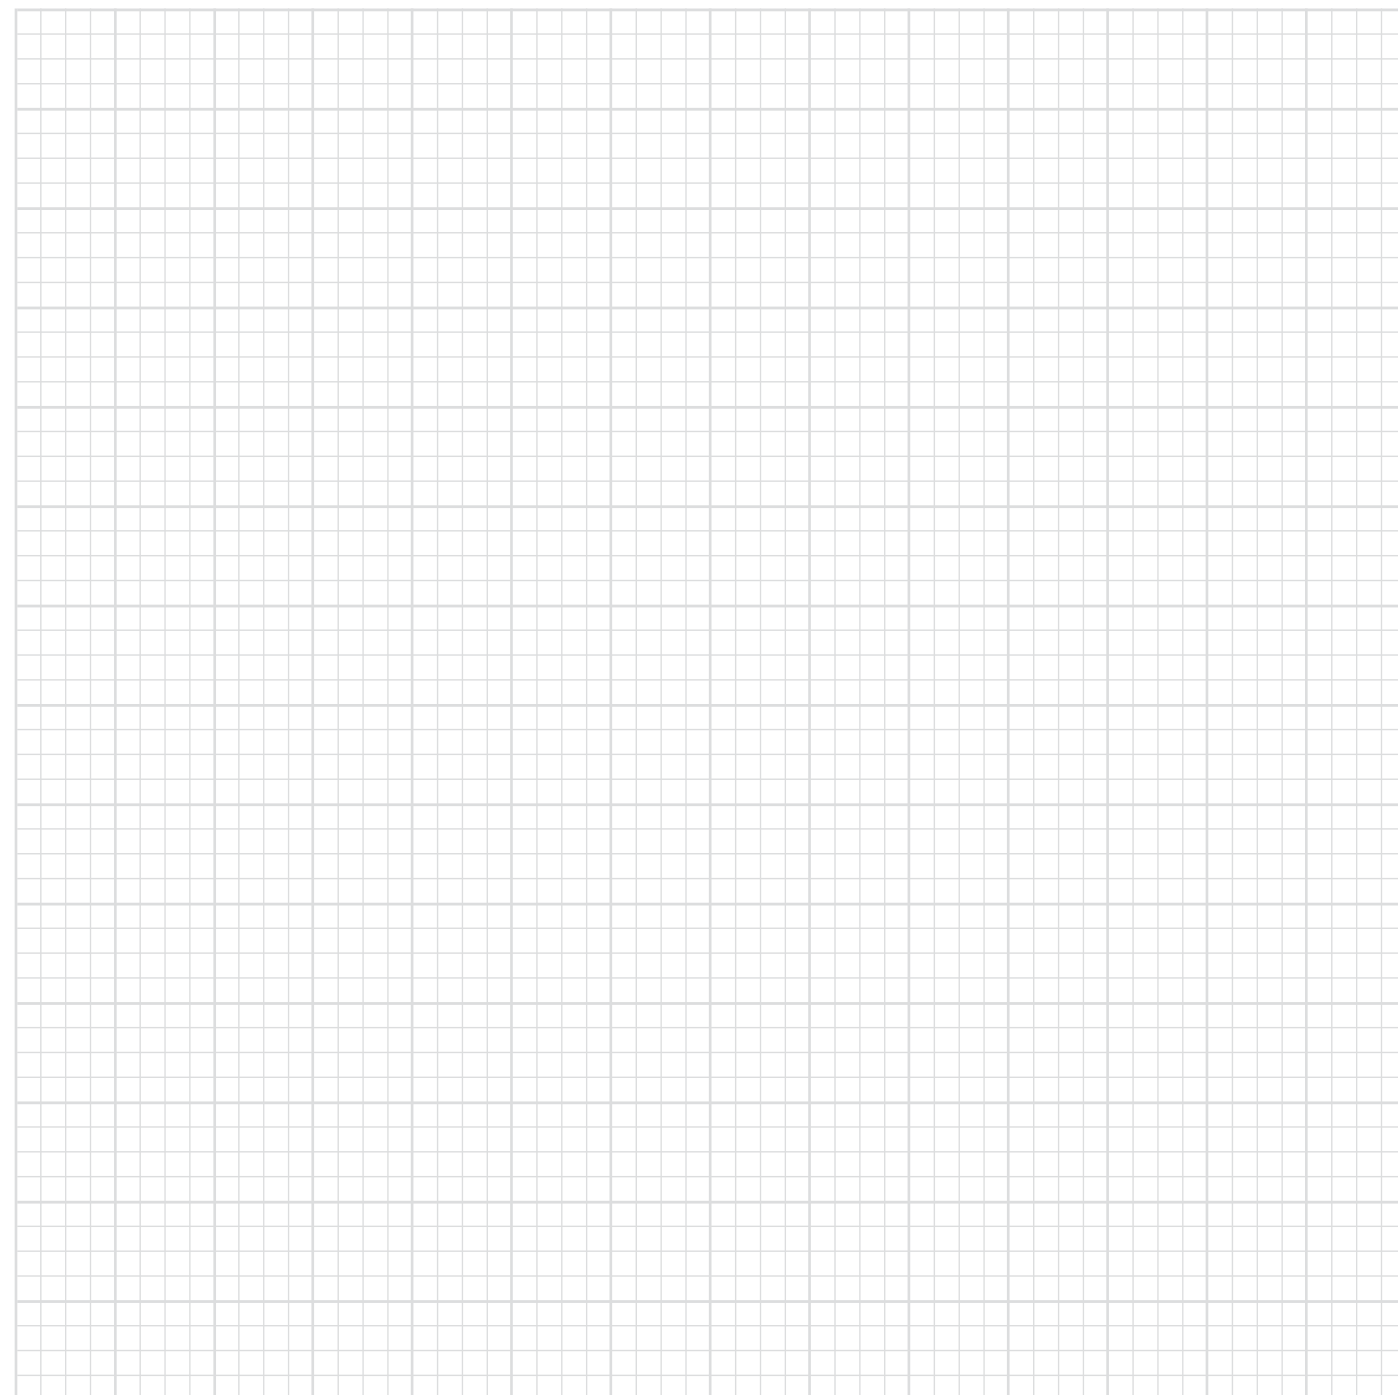

EconoGlide™ Flange Bearings

EconoGlide Flange Bearings IBFPM & IBFPMR

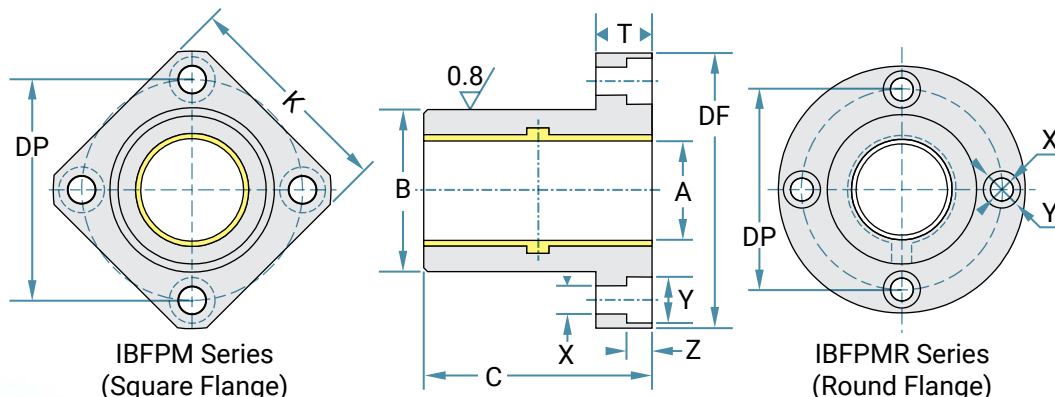

DIMENSIONAL INFORMATION

Standard I.D. Series Similar to Preloaded Ball Bearing		A Bearing I.D. F8		Nominal Size mm	B Body O.D. H7		C Length H13		Effective Surface Area CM ²	Max Static Load Frelon® IM N
Part No. Square	Part No. Round	MIN	MAX		MIN	MAX	MIN	MAX		
IBFPM08-01	IBFPMR08-01	8.025	8.083	8	15.982	16	24.8	25	2.094	6,720
IBFPM12-01	IBFPMR12-01	12.030	12.088	12	21.979	22	31.8	32	4.021	6,720
IBFPM16-01	IBFPMR16-01	16.030	16.088	16	25.979	26	35.8	36	6.032	10,080
IBFPM20-01	IBFPMR20-01	20.030	20.091	20	31.975	32	44.8	45	9.425	15,750
IBFPM25-01	IBFPMR25-01	25.030	25.091	25	39.975	40	57.7	58	15.184	25,375
IBFPM30-01	IBFPMR30-01	30.040	30.110	30	46.975	47	67.7	68	21.363	35,700
IBFPM40-01	IBFPMR40-01	40.040	40.115	40	61.970	62	79.7	80	33.510	56,000
IBFPM50-01	IBFPMR50-01	50.050	50.130	50	74.970	75	99.7	100	52.360	87,500

Notes: (1) Formula used for effective surface area is (pi * ID * L)/3.

MOUNTING DIMENSIONS

Part No.		K Square MAX.	DF O.D. MAX.	T Length MAX.	Dp Bolt Circle	X Hole	Y C'Bore Depth	Z C'Bore Depth	Clamping Bolt	Concentricity	Squareness	SFPM Weight Kg.	SFPMR Weight Kg.
Square	Round												
IBFPM08-01	IBFPMR08-01	25	32	8	24	3.5	6	3.1	M 3	0.012	0.012	0.017	0.020
IBFPM12-01	IBFPMR12-01	32	42	9	32	4.5	7.5	4.1	M 4	0.012	0.012	0.032	0.042
IBFPM16-01	IBFPMR16-01	35	46	9	36	4.5	7.5	4.1	M 4	0.012	0.012	0.041	0.051
IBFPM20-01	IBFPMR20-01	42	54	11	43	5.5	9	5.1	M 5	0.015	0.015	0.073	0.088
IBFPM25-01	IBFPMR25-01	50	62	11	51	5.5	9	5.1	M 5	0.015	0.015	0.135	0.152
IBFPM30-01	IBFPMR30-01	60	76	14	62	6.6	11	6.1	M 6	0.015	0.015	0.228	0.266
IBFPM40-01	IBFPMR40-01	75	98	18	80	9.0	14	8.1	M 8	0.017	0.017	0.454	0.552
IBFPM50-01	IBFPMR50-01	88	112	18	94	9.0	14	8.1	M 8	0.017	0.017	0.735	0.853





Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Simplicity® Linear Plain Bearings

Linear Plain Bearings FM & FMN

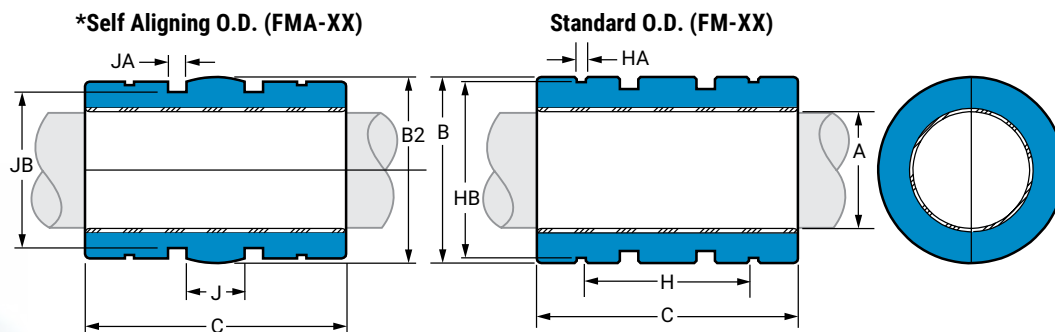

*Except for the O.D., bearings with the self-aligning feature have the same dimensions and tolerances as the standard bearing. There is a spherical crown on the O.D. to create the self-aligning feature. They are for use in a straight bore housing. Add an "A" to the part number for self-aligning bearings.

DIMENSIONAL INFORMATION

Precision I.D. Series Similar to Preloaded Ball Bearing					Compensated I.D. Series Similar to Standard Ball Bearing				B		B2		C Length		Concentric	Bearing Weight
Part No.		Nominal Size	A Bearing I.D. F8		Part No.		A Bearing I.D.		Standard O.D. H7		Self-Aligning O.D. FMA					
Closed	Open	mm	MIN	MAX	Closed	Open	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MAX mm	Kg.
FM05	FMN05	5	5.010	5.028	FMC05	FMCN05	5.060	5.078	11.982	12	11.941	11.966	21.619	22	0.0254	0.004
FM08	FMN08	8	8.013	8.035	FMC08	FMCN08	8.063	8.085	15.982	16	15.941	15.966	24.619	25	0.0254	0.009
FM10	FMN10	10	10.013	10.035	FMC10	FMCN10	10.063	10.085	18.979	19	18.938	18.964	28.619	29	0.0254	0.014
FM12	FMN12	12	12.016	12.043	FMC12	FMCN12	12.066	12.093	21.979	22	21.938	21.963	31.619	32	0.0254	0.017
FM16	FMN16	16	16.016	16.043	FMC16	FMCN16	16.066	16.093	25.979	26	25.938	25.964	35.619	36	0.0254	0.028
FM20	FMN20	20	20.020	20.053	FMC20	FMCN20	20.096	20.129	31.975	32	31.938	31.963	44.619	45	0.0254	0.054
FM25	FMN25	25	25.020	25.053	FMC25	FMCN25	25.096	25.129	39.975	40	39.936	39.962	57.619	58	0.0254	0.109
FM30	FMN30	30	30.020	30.053	FMC30	FMCN30	30.096	30.129	46.975	47	46.937	46.962	67.619	68	0.0254	0.176
FM40	FMN40	40	40.025	40.064	FMC40	FMCN40	40.127	40.166	61.970	62	61.935	61.961	79.619	80	0.0254	0.356
FM50	FMN50	50	50.025	50.064	FMC50	FMCN50	50.127	50.166	74.970	75	74.935	74.960	99.619	100	0.0254	0.628
FM60	FMN60	60	60.030	60.076	FMC60	FMCN60	60.182	60.228	89.965	90	89.931	89.957	124.619	125	0.0380	1.117
FM80	FMN80	80	80.030	80.076	FMC80	FMCN80	80.182	80.228	119.965	120	119.931	119.957	164.619	165	0.0510	2.679

MOUNTING DIMENSIONS

Part No.		Nominal Size	H	HA	HB	Ret. Ring Part No.	J	JA	JB	Metric O'ring Size
Closed	Open	mm	Between Ret. Rings	Ret. Ring GRV. Width	Ret. Ring GRV. Dia.	Din 471	Between O'ring GRVS.	O'ring GRV. Width	O'ring GRV. Dia.	
FM05	FMN05	5	12	1.14	11.5	12	5	2	9.86	9.7 x 1.3
FM08	FMN08	8	14	1.14	15.2	16	5.33	2	13.2	13 x 1.7
FM10	FMN10	10	19.4	1.32	18.0	19	5.63	2.44	15.7	15.5 x 2
FM12	FMN12	12	20	1.32	21.0	22	6	3.17	17.9	17.5 x 2.5
FM16	FMN16	16	22	1.32	24.9	26	8	3.17	21.9	21.5 x 2.5
FM20	FMN20	20	28	1.63	30.3	32	10	3.17	27.9	27.5 x 2.5
FM25	FMN25	25	40	1.90	37.5	40	12.5	3.17	35.9	35.5 x 2.5
FM30	FMN30	30	48	1.90	44.5	47	15	3.17	42.7	42.52 x 2.62
FM40	FMN40	40	56	2.20	59.0	62	20	4.1	56.3	56 x 3.5
FM50	FMN50	50	72	2.70	72.0	75	25	4.1	69.2	69 x 3.5
FM60	FMN60	60	95	3.20	86.4	90	30	7.1	81.7	81 x 5
FM80	FMN80	80	125	4.17	116.1	120	40	7.1	111.7	111 x 5


Simplicity® Linear Plain Bearings

INCH

ISO METRIC

JIS METRIC

Linear Plain Bearings FMN

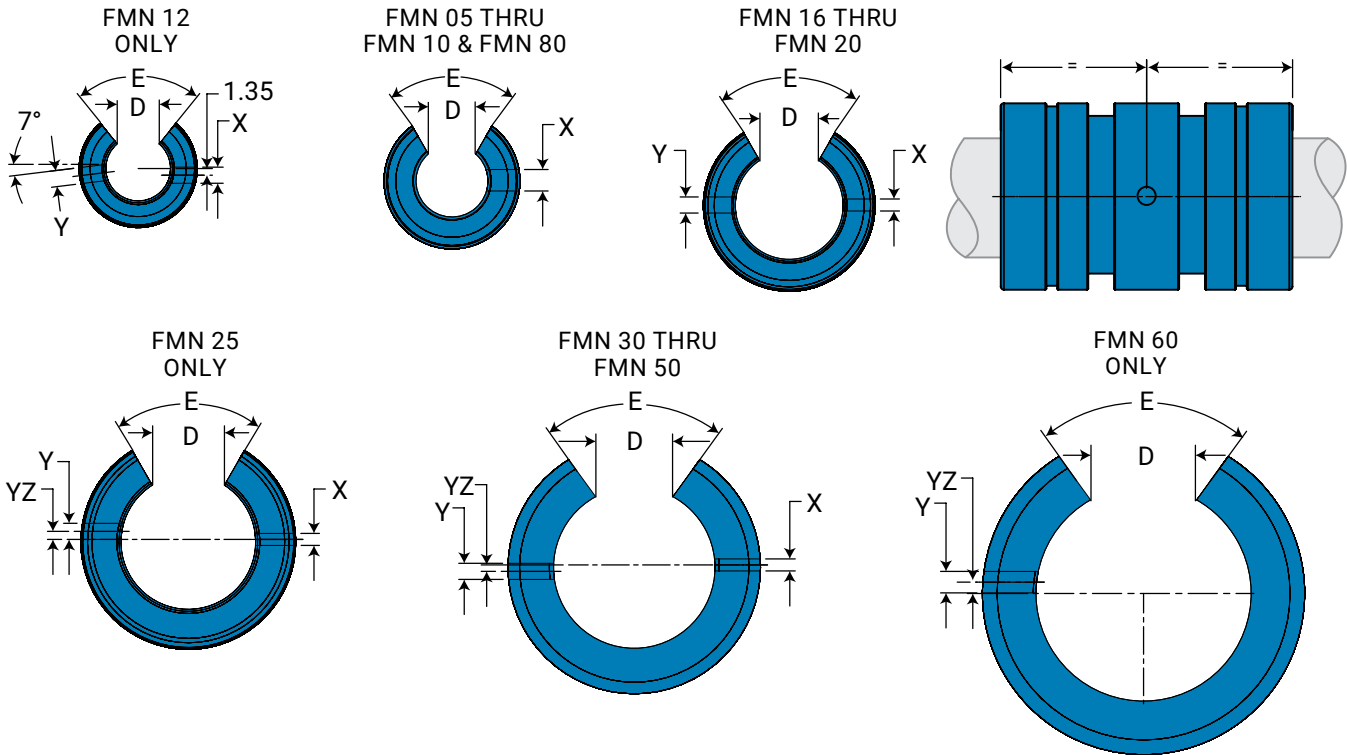

OPEN DIMENSIONAL INFORMATION

Part No.	Nominal Size mm	D Slot Wide MIN	E Slot Angle	X Ret. Hole Dia.	Y Ret. Hole Dia.	Yz Ret. Hole Locate	Bearing Wt. Kg.
FMN05	5	3.2	60	2.2	N/A	N/A	0.0034
FMN08	8	5.1	60	3.0	N/A	N/A	0.0077
FMN10	10	6.4	60	3.0	N/A	N/A	0.0119
FMN12	12	7.6	78	3.0	3.0	7.0	0.0156
FMN16	16	10.4	78	2.2	3.0	0	0.0213
FMN20	20	10.8	60	2.2	3.0	0	0.0439
FMN25	25	13.2	60	3.0	3.0	1.5	0.0893
FMN30	30	14.2	72	3.0	3.0	2.0	0.1460
FMN40	40	19.5	72	3.0	3.0	1.5	0.2948
FMN50	50	24.0	72	3.0	5.0	2.5	0.5202
FMN60	60	29.6	72	N/A	6.0	0	0.9199
FMN80	80	39.0	72	N/A	8.0	0	2.2269

LOAD & SPEED DATA

Part No.	Effective Surface Area sq. in.	MAX Static Load lb. Frelon®		Effective Surface Area CM ²	MAX Static Load N Frelon	
		GOLD	J		GOLD	J & W
FMN05	0.171	511	256	1.10	2,276	1,138
FMN08	0.310	926	463	2.00	4,120	2,060
FMN10	0.450	1345	672	2.90	5,984	2,992
FMN12	0.589	1,777	888	3.80	7,907	3,953
FMN16	0.899	2,667	1,334	5.80	11,870	5,935
FMN20	1.395	4,167	2,083	9.00	18,541	9,270
FMN25	2.248	6,715	3,358	14.50	29,881	14,941
FMN30	3.162	9,444	4,722	20.40	42,026	21,013
FMN40	4.960	14,814	7,407	32.00	65,923	32,962
FMN50	7.750	23,147	11,574	50.00	103,005	51,503
FMN60	11.625	34,721	17,360	75.00	154,508	77,254
FMN80	20.460	61,120	30,554	132.00	271,933	135,967

Note: MAX PV (m/min. * kg/sq. cm)

FrelonGOLD® = 430 PV

Frelon J = 215 PV

MAX Speed Running Dry (m/min.)

FrelonGOLD = 91.4

Frelon J = 42.6

MAX Speed Running

with Lubrication (m/min.)

FrelonGOLD = 251.5

Frelon J = 122

MAX PV (m/s. * N/mm²)

FrelonGOLD = 0.70 PV

Frelon J = 0.35 PV

MAX Speed Running Dry (m/s)

FrelonGOLD = 1.52

Frelon J = 0.71

MAX Speed Running

with Lubrication (m/s)

FrelonGOLD = 4.19

Frelon J = 2.03



Plain Bearing Accessories:
Retaining Rings, Seals, O-Rings—page 31





Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Simplicity® Thin Wall Bearings

Plain Bearings – Compact Thin Wall FG

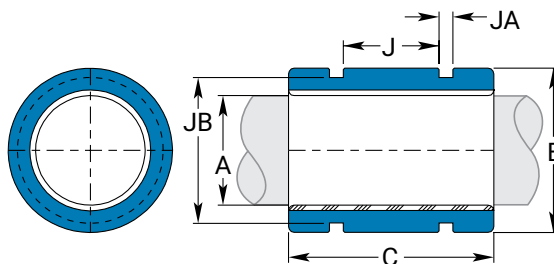

DIMENSIONAL INFORMATION

Precision I.D. Series Similar to Preloaded Ball Bearing				Compensated I.D. Series Similar to Standard Ball Bearing			B O.D. H7		C Length		Concentric	Bearing Weight
Part No. Closed	Nominal Size mm	A Bearing I.D. F8		Part No. Closed	A Bearing I.D.		MIN	MAX	MIN	MAX	MAX mm	Kg.
FG06	6	6.010	6.028	FGC 06	6.060	6.078	11.98	12	17.619	18	0.0254	0.004
FG08	8	8.013	8.035	FGC 08	8.063	8.085	14.98	15	19.619	20	0.0254	0.006
FG10	10	10.013	10.035	FGC 10	10.063	10.085	16.98	17	21.619	22	0.0254	0.008
FG12	12	12.016	12.043	FGC 12	12.066	12.093	21.98	22	26.619	27	0.0254	0.018
FG15	15	15.016	15.043	FGC 15	15.066	15.093	24.98	25	27.619	28	0.0254	0.022
FG16	16	16.016	16.043	FGC 16	16.066	16.093	25.98	26	29.619	30	0.0254	0.025
FG18	18	18.020	18.053	FGC 18	18.096	18.129	27.98	28	29.619	30	0.0254	0.027
FG20	20	20.020	20.053	FGC 20	20.096	20.129	31.98	32	34.619	35	0.0254	0.044
FG25	25	25.020	25.053	FGC 25	25.096	25.129	39.98	40	44.619	45	0.0254	0.091
FG30	30	30.020	30.053	FGC 30	30.096	30.129	44.98	45	53.619	54	0.0254	0.127
FG35	35	35.025	35.064	FGC 35	35.127	35.166	51.98	52	61.619	62	0.0254	0.189
FG40	40	40.025	40.064	FGC 40	40.127	40.166	59.98	60	71.619	72	0.0254	0.301
FG50	50	50.025	50.064	FGC 50	50.127	50.166	74.98	75	89.619	90	0.0254	0.596

MOUNTING DIMENSIONS

Part No.		Nominal Size	J Between O-Ring GRVS.	Ja O-Ring GRV. Width	Jb O-Ring GRV. Dia.	O-Ring Size	O-Ring Part Number
Precision	Compensated						
FG06	FGC06	6	N/A	N/A	N/A	N/A	N/A
FG08	FGC08	8	8.0	2.032	12.201	12 x 1.7	6000025
FG10	FGC10	10	8.3	2.032	14.415	14 x 1.6	6000026
FG12	FGC12	12	12.0	3.175	17.907	17.5 x 2.5	6000016
FG15	FGC15	15	12.7	3.175	20.671	20 x 2.65	6000029
FG16	FGC16	16	12.7	3.175	21.882	21.5 x 2.5	6000017
FG18	FGC18	18	14.0	3.175	23.885	23.5 x 2.5	6000031
FG20	FGC20	20	17.0	3.175	27.864	27.5 x 2.5	6000018
FG25	FGC25	25	24.0	3.175	35.865	35.5 x 2.5	6000019
FG30	FGC30	30	30.0	3.175	40.895	40 x 2.5	6000034
FG35	FGC35	35	36.0	4.115	46.200	46 x 3.5	6000035
FG40	FGC40	40	37.3	4.115	54.255	53 x 3.5	6000036
FG50	FGC50	50	50	4.115	69.215	69 x 3.5	6000022

LOAD & SPEED DATA

Part No.	Effective Surface Area CM ²	Max Static Load lb. Frelon®		Effective Surface Area CM ²	MAX Static Load N Frelon	
		GOLD	J & W		GOLD	J & W
FG06	1.1	498	249	1.10	2,217	1,109
FG08	1.6	741	370	1.60	3,296	1,648
FG10	2.2	1,018	509	2.20	4,532	2,266
FG12	3.2	1,499	749	3.20	6,671	3,335
FG15	4.2	1,944	972	4.20	8,652	4,326
FG16	4.8	2,222	1,111	4.80	9,888	4,944
FG18	5.4	2,500	1,250	5.40	11,125	5,562
FG20	7.0	3,241	1,620	7.00	14,421	7,210
FG25	11.3	5,207	2,604	11.30	23,171	11,586
FG30	16.2	7,500	3,750	16.20	33,374	16,687
FG35	21.7	10,048	5,024	21.70	44,714	22,357
FG40	28.8	13,333	6,666	28.80	59,331	29,665
FG50	45.0	20,833	10,416	45.00	92,705	46,352



Plain Bearing Accessories: Retaining Rings, Seals, O-Rings
page 31



**Only certified Simplicity 60 Plus Shafting provides
maximum linear bearing performance.**

Inch Series—page 52 Metric Series—page 94

Note: MAX PV (m/min. * kg/sq. cm)

FrelonGOLD® = 430 PV

Frelon J = 215 PV

MAX Speed Running Dry (m/min.)

FrelonGOLD = 91.4

Frelon J = 42.6

MAX Speed Running

with Lubrication (m/min.)

FrelonGOLD = 251.5

Frelon J = 122

MAX PV (m/s. * N/mm²)

FrelonGOLD = 0.70 PV

Frelon J = 0.35 PV

MAX Speed Running Dry (m/s)

FrelonGOLD = 1.52

Frelon J = 0.71

MAX Speed Running



with Lubrication (m/s)

FrelonGOLD = 4.19

Frelon J = 2.03

Simplicity® Thin Wall Bearings

Plain Bearings – Compact Thin Wall FMT

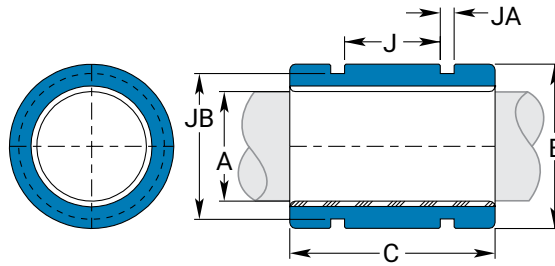

DIMENSIONAL INFORMATION

Precision I.D. Series Similar to Preloaded Ball Bearing				Compensated I.D. Series Similar to Standard Ball Bearing			B O.D. H7		C Length		Concentric	Bearing Weight
Part No.	Nominal Size	A Bearing I.D. F8		Part No.	A Bearing I.D.		MIN	MAX	MIN	MAX	MAX mm	Kg.
Closed	mm	MIN	MAX	Closed	MIN	MAX						
FMT06	6	6.010	6.028	FMTC 06	6.060	6.078	11.982	12	21.619	22	0.0254	0.0057
FMT08	8	8.013	8.035	FMTC 08	8.063	8.085	14.982	15	23.619	24	0.0254	0.0071
FMT10	10	10.013	10.035	FMTC 10	10.063	10.085	16.982	17	25.619	26	0.0254	0.0085
FMT12	12	12.016	12.043	FMTC 12	12.066	12.093	18.979	19	27.619	28	0.0254	0.0113
FMT14	14	14.016	14.043	FMTC 14	14.066	14.093	20.979	21	27.619	28	0.0254	0.0128
FMT16	16	16.016	16.043	FMTC 16	16.066	16.093	23.979	24	29.619	30	0.0254	0.0184
FMT20	20	20.020	20.053	FMTC 20	20.096	20.129	27.979	28	29.619	30	0.0254	0.0227
FMT25	25	25.020	25.053	FMTC 25	25.096	25.129	34.975	35	39.619	40	0.0254	0.0439
FMT30	30	30.020	30.053	FMTC 30	30.096	30.129	39.975	40	49.619	50	0.0254	0.0652
FMT40	40	40.025	40.064	FMTC 40	40.127	40.166	51.970	52	59.619	60	0.0254	0.1233
FMT50	50	50.025	50.064	FMTC 50	50.127	50.166	61.970	62	69.619	70	0.0254	0.1772

MOUNTING DIMENSIONS

Part No.		Nominal Size	J	JA	JB	O-Ring Size	O-Ring Part Number
Precision	Compensated		Between O-Ring GRVS.	O-Ring GRV. Width	O-Ring GRV. Dia.		
FMT06	FMTC06	6	N/A	N/A	N/A	N/A	N/A
FMT08	FMTC08	8	10.0	2.000	12.200	12 x 1.7	6000025
FMT10	FMTC10	10	12.0	2.000	14.400	14 x 1.6	6000026
FMT12	FMTC12	12	14.0	2.000	16.600	16 x 1.5	6000027
FMT14	FMTC14	14	14.0	2.000	18.500	18 x 1.5	6000028
FMT16	FMTC16	16	14.0	2.000	21.300	21.1 x 1.6	6000030
FMT20	FMTC20	20	14.0	2.000	25.500	25 x 1.5	6000032
FMT25	FMTC25	25	22.0	3.200	30.900	30.5 x 2.5	6000033
FMT30	FMTC30	30	30.0	3.200	35.900	35.5 x 2.5	6000019
FMT40	FMTC40	40	40.0	4.100	46.200	46 x 3.5	6000035
FMT50	FMTC50	50	50.0	4.100	56.300	26 x 3.5	6000021

LOAD & SPEED DATA

Part No.	Effective Surface Area CM ²	Max Static Load lb. Frelon®		Effective Surface Area CM ²	MAX Static Load N Frelon	
		GOLD	J & W		GOLD	J & W
FMT06	0.202	613	307	1.3	2,727	1,364
FMT08	0.295	891	445	1.9	3,963	1,982
FMT10	0.403	1,204	602	2.6	5,356	2,678
FMT12	0.527	1,556	778	3.4	6,926	3,463
FMT14	0.605	1,816	908	3.9	8,083	4,042
FMT16	0.744	2,222	1,111	4.8	9,888	4,944
FMT20	0.930	2,778	1,389	6.0	12,361	6,180
FMT25	1.550	4,629	2,315	10.0	20,601	10,301
FMT30	2.325	6,944	3,472	15.0	30,902	15,451
FMT40	3.720	11,111	5,555	24.0	49,442	24,721
FMT50	5.425	16,203	8,102	35.0	72,104	36,052

Note: MAX PV (m/min. * kg/sq. cm)

FrelonGOLD® = 430 PV

Frelon J = 215 PV

MAX Speed Running Dry (m/min.)

FrelonGOLD = 91.4

Frelon J = 42.6

MAX Speed Running

with Lubrication (m/min.)

FrelonGOLD = 251.5

Frelon J = 122

MAX PV (m/s. * N/mm²)

FrelonGOLD = 0.70 PV

Frelon J = 0.35 PV

MAX Speed Running Dry (m/s)

FrelonGOLD = 1.52

Frelon J = 0.71

MAX Speed Running

with Lubrication (m/s)

FrelonGOLD = 4.19

Frelon J = 2.03



Plain Bearing Accessories: Retaining Rings, Seals, O-Rings
page 31






Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Simplicity® Closed Pillow Blocks

Plain Bearings – Closed Pillow Blocks **PM**

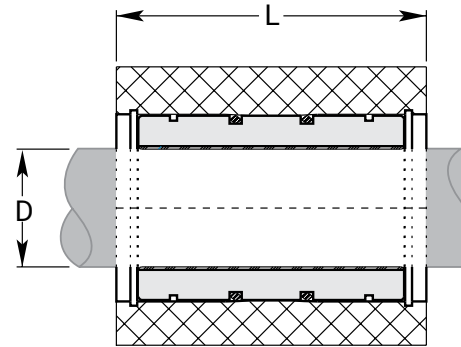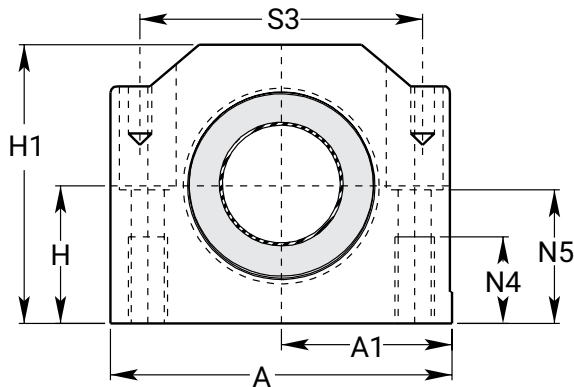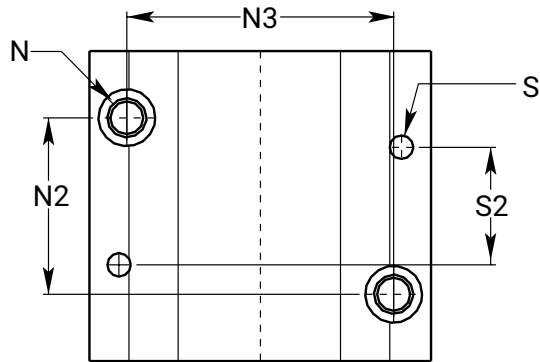

DIMENSIONAL INFORMATION

Part No.		D Nom. Brg. I.D.	H Centerline	H1 Height	A Width	A1	L Length	N Bolt	N2	N3	N4	N5	S	S2	S3	Max Static Load lb. Frelon®		Max Static Load N Frelon		Assem. WT. Kg.
Precision	Compensated															GOLD	J & W	GOLD	J & W	
PM08	PM08C	8	15	28	35	17.5	32	M4 x 0.7	20	25	9	14.5	N/A	N/A	N/A	926	463	4,120	2,060	0.069
PM10	PM10C	10	16	31.5	40	20	36	M5 x 0.8	20	29	11	15	4	29	31	1,345	672	5,984	2,992	0.095
PM12	PM12C	12	18	35	43	21.5	39	M5 x 0.8	23	32	11	16.5	4	32	34	1,777	888	7,907	3,953	0.118
PM16	PM16C	16	22	42	53	26.5	43	M6 x 1.0	26	40	13	21	4	35	42	2,667	1,334	11,870	5,935	0.200
PM20	PM20C	20	25	50	59.3	30	54	M8 x 1.25	32	45	18	24	5	45	50	4,167	2,083	18,541	9,270	0.329
PM25	PM25C	25	30	60	78	39	67	M10 x 1.5	40	60	22	29	6	20	64	6,715	3,358	29,881	14,941	0.655
PM30	PM30C	30	35	71	87	43.5	79	M10 x 1.5	45	68	22	34	6	30	72	9,444	4,722	42,026	21,013	1.020
PM40	PM40C	40	45	91	108	54	91	M12 x 1.75	58	86	26	44	8	35	90	14,814	7,407	65,923	32,962	1.846
PM50	PM50C	50	50	105	132	66	113	M16 x 2.0	50	108	34	49	10	42	108	23,147	11,574	103,005	51,503	3.169

Notes: (1) Standard pillow block assembly includes self-aligning housing and precision bearing.
 (2) All standard metric pillow blocks use standard FM series bearings.
 (3) Straight bore pillow block assembly includes standard O.D. FM series bearing in straight bore housing.





Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Simplicity® Open Pillow Blocks

Plain Bearings – Open Pillow Blocks PMN

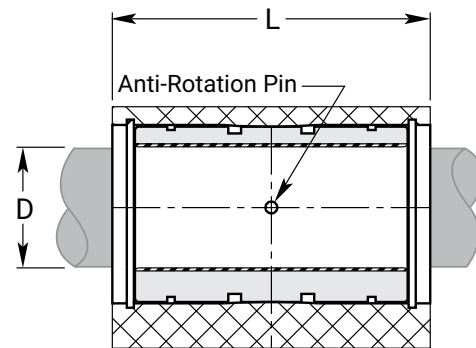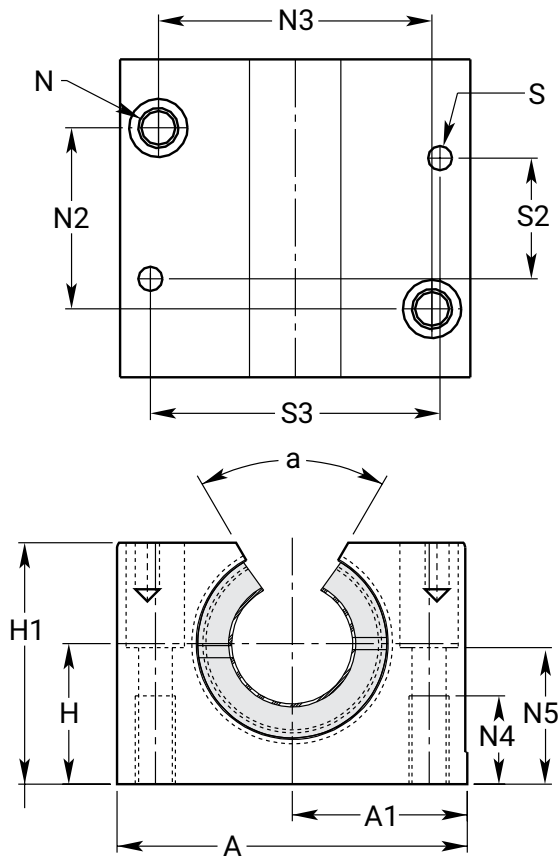

DIMENSIONAL INFORMATION

Part No.		D Nom. Brg. I.D.	H Centerline	H1	A	A1	L	N								A	Max Static Load lb.		Max Static Load N		Assem. WT.
Open																	Frelon®		Frelon		
Precision	Compensated	MIN	0.015	Height	Width	0.013	Length	Bolt	N2	N3	N4	N5	S	S2	S3	mm	GOLD	J & W	GOLD	J & W	Kg.
PMN12	PMN12C	12	18	28	43	21.5	39	M5 x 0.8	23	32	11	16.5	4	32	34	66	1,777	888	7,907	3,953	0.096
PMN16	PMN16C	16	22	35	53	26.5	43	M6 x 1.0	26	40	13	21	4	35	42	68	2,667	1,334	11,870	5,935	0.162
PMN20	PMN20C	20	25	42	60	30	54	M8 x 1.25	32	45	18	24	5	45	50	60	4,167	2,083	18,541	9,270	0.267
PMN25	PMN25C	25	30	51	78	39	67	M10 x 1.5	40	60	20	29	6	20	64	60	6,715	3,358	29,881	14,941	0.536
PMN30	PMN30C	30	35	60	87	43.5	79	M10 x 1.5	45	68	22	34	6	30	72	60	9,444	4,722	42,026	21,013	0.831
PMN40	PMN40C	40	45	77	108	54	91	M12 x 1.75	58	86	26	44	8	35	90	60	14,814	7,407	65,923	32,962	1.499
PMN50	PMN50C	50	50	88	132	66	113	M16 x 2.0	50	108	34	49	10	42	108	60	23,147	11,574	103,005	51,503	2.539




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Simplicity® Flange Bearings

Flange Bearings SFPM

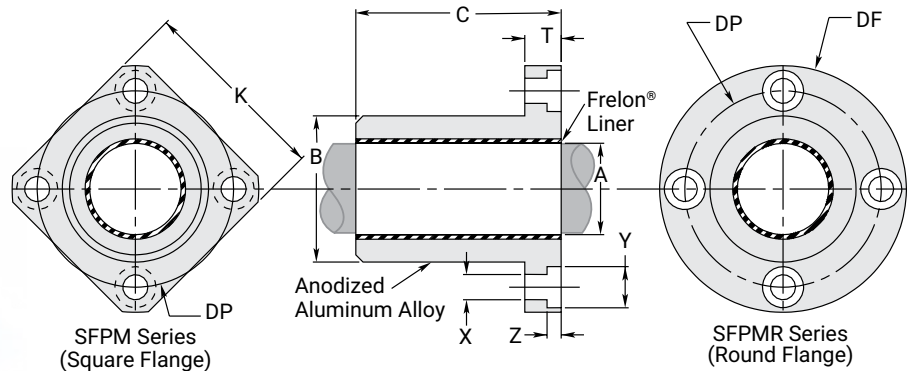

DIMENSIONAL INFORMATION

Precision I.D. Series Similar to Preloaded Ball Bearing				Compensated I.D. Series Similar to Standard Ball Bearing				Nominal Size	B Body O.D. H7		C Length H13		Effective Surface Area	Max Static Load N	
Part No.		A Bearing I.D. F8		Part No.		A Bearing I.D.			MIN	MAX	MIN	MAX		CM ²	Frelon®
Square	Round	MIN	MAX	Square	Round	MIN	MAX						mm		GOLD
SFPM08	SFPMR08	8.013	8.035	SFPM08C	SFPMR08C	8.063	8.085	8	15.982	16	24.8	25	2.094	4,316	2,168
SFPM12	SFPMR12	12.016	12.043	SFPM12C	SFPMR12C	12.066	12.093	12	21.979	22	31.8	32	4.021	8,280	4,159
SFPM16	SFPMR16	16.016	16.043	SFPM16C	SFPMR16C	16.066	16.093	16	25.979	26	35.8	36	6.032	12,429	6,239
SFPM20	SFPMR20	20.020	20.053	SFPM20C	SFPMR20C	20.096	20.129	20	31.975	32	44.8	45	9.425	19,414	9,751
SFPM25	SFPMR25	25.020	25.053	SFPM25C	SFPMR25C	25.096	25.129	25	39.975	40	57.7	58	15.184	31,284	15,706
SFPM30	SFPMR30	30.020	30.053	SFPM30C	SFPMR30C	30.096	30.129	30	46.975	47	67.7	68	21.363	44,008	22,102
SFPM40	SFPMR40	40.025	40.064	SFPM40C	SFPMR40C	40.127	40.166	40	61.970	62	79.7	80	33.510	69,033	34,669
SFPM50	SFPMR50	50.025	50.064	SFPM50C	SFPMR50C	50.127	50.166	50	74.970	75	99.7	100	52.360	107,871	54,161
SFPM60	SFPMR60	60.030	60.076	SFPM60C	SFPMR60C	60.182	60.228	60	89.965	90	124.6	125	78.540	161,796	81,246
SFPM80	SFPMR80	80.030	80.076	SFPM80C	SFPMR80C	80.182	80.228	80	119.965	120	164.6	165	138.230	284,765	142,991

Notes: (1) Formula used for effective surface area is (pi * ID * L)/3.

(2) Max static load is effective surface area times MAX load for FrelonGOLD®.

(3) - 210 kgf/cm² is the rating for FrelonGOLD; 105.45 kgf/cm² is the rating for Frelon J.

MOUNTING DIMENSIONS

Part No.		K Square	DF O.D.	T Length	Dp Bolt Circle	X Hole	Y C'Bore Depth	Z C'Bore Depth	Clamping Bolt	Concentricity	Squareness	SFPM Weight Kg.	SFPMR Weight Kg.
Square	Round	MAX.	MAX.	MAX.									
SFPM08	SFPMR08	25	32	8	24	3.5	6	3.1	M 3	0.012	0.012	0.018	0.022
SFPM12	SFPMR12	32	42	9	32	4.5	7.5	4.1	M 4	0.012	0.012	0.037	0.046
SFPM16	SFPMR16	35	46	9	36	4.5	7.5	4.1	M 4	0.012	0.012	0.047	0.058
SFPM20	SFPMR20	42	54	11	43	5.5	9	5.1	M 5	0.015	0.015	0.085	0.101
SFPM25	SFPMR25	50	62	11	51	5.5	9	5.1	M 5	0.015	0.015	0.156	0.172
SFPM30	SFPMR30	60	76	14	62	6.6	11	6.1	M 6	0.015	0.015	0.257	0.293
SFPM40	SFPMR40	75	98	18	80	9.0	14	8.1	M 8	0.017	0.017	0.500	0.595
SFPM50	SFPMR50	88	112	18	94	9.0	14	8.1	M 8	0.017	0.017	0.825	0.930
SFPM60	SFPMR60	106	134	24	112	11.0	17	11.1	M 10	0.020	0.020	1.506	1.697
SFPM80	SFPMR80	136	164	24	142	11.0	17	11.1	M 10	0.020	0.020	3.308	3.483




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Simplicity® Flange Bearings

Flange Bearings DFPM

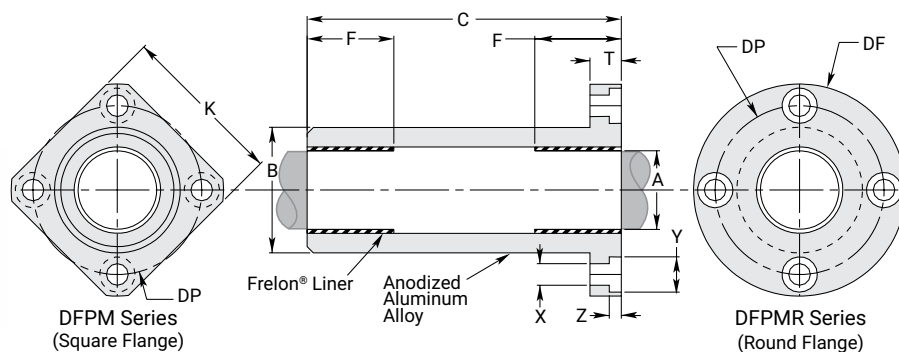

DIMENSIONAL INFORMATION

Precision I.D. Series Similar to Preloaded Ball Bearing				Compensated I.D. Series Similar to Standard Ball Bearing				Nominal Size	B Body O.D. H7		C Length		F Length Each End	Effective Surface Area CM ²	MAX Static Load N	
Part No.		A Bearing I.D. F8		Part No.		A Bearing I.D.			MIN	MAX	MIN	MAX			Frelon®	
Square	Round	MIN	MAX	Square	Round	MIN	MAX									
DFPM08	DFPMR08	8.013	8.035	DFPM08C	DFPMR08C	8.063	8.085	8	15.982	16	44.7	45	12.1	2.027	4,179	2,099
DFPM12	DFPMR12	12.016	12.043	DFPM12C	DFPMR12C	12.066	12.093	12	21.979	22	56.7	57	15.4	3.870	7,976	4,002
DFPM16	DFPMR16	16.016	16.043	DFPM16C	DFPMR16C	16.066	16.093	16	25.979	26	69.7	70	20.4	6.836	14,087	7,073
DFPM20	DFPMR20	20.020	20.053	DFPM20C	DFPMR20C	20.096	20.129	20	31.975	32	79.7	80	22.1	9.257	19,071	9,575
DFPM25	DFPMR25	25.020	25.053	DFPM25C	DFPMR25C	25.096	25.129	25	39.975	40	111.6	112	33.1	17.331	35,708	17,933
DFPM30	DFPMR30	30.020	30.053	DFPM30C	DFPMR30C	30.096	30.129	30	46.975	47	122.6	123	35	21.991	45,303	22,749
DFPM40	DFPMR40	40.025	40.064	DFPM40C	DFPMR40C	40.127	40.166	40	61.970	62	150.6	151	44	36.861	75,939	38,131
DFPM50	DFPMR50	50.025	50.064	DFPM50C	DFPMR50C	50.127	50.166	50	74.970	75	191.6	192	69.5	72.780	149,936	75,282
DFPM60	DFPMR60	60.030	60.076	DFPM60C	DFPMR60C	60.182	60.228	60	89.965	90	208.6	209	73	91.735	188,980	94,892

Notes: (1) Formula used for effective surface area is $(\pi * ID * L)/3$.
 (2) MAX static load is effective surface area times MAX load for FrelonGOLD®.
 (3) - 210 kgf/cm² is the rating for FrelonGOLD®; 105.45 kgf/cm² is the rating for Frelon J.
 (4) Frelon pads in each end (F dimension).

MOUNTING DIMENSIONS

Part No.		K	DF	T	DP	X	Y	Z	Clamping	Concentricity	Squareness	DFPM Weight Kg.	DFPMR Weight Kg.
Square	Round	MAX	O.D. MAX	Length MAX	Bolt Circle	Hole	C'bore Depth	C'bore Depth	Bolt				
DFPM08	DFPMR08	25	32	8	24	3.5	6	3.1	M 3	0.015	0.015	0.027	0.031
DFPM12	DFPMR12	32	42	9	32	4.5	7.5	4.1	M 4	0.015	0.015	0.055	0.064
DFPM16	DFPMR16	35	46	9	36	4.5	7.5	4.1	M 4	0.015	0.015	0.078	0.089
DFPM20	DFPMR20	42	54	11	43	5.5	9	5.1	M 5	0.017	0.017	0.133	0.149
DFPM25	DFPMR25	50	62	11	51	5.5	9	5.1	M 5	0.017	0.017	0.270	0.286
DFPM30	DFPMR30	60	76	14	62	6.6	11	6.1	M 6	0.017	0.017	0.413	0.450
DFPM40	DFPMR40	75	98	18	80	9.0	14	8.1	M 8	0.020	0.020	0.846	0.942
DFPM50	DFPMR50	88	112	18	94	9.0	14	8.1	M 8	0.020	0.020	1.450	1.556
DFPM60	DFPMR60	106	134	24	112	11.0	17	11.1	M 10	0.025	0.025	2.329	2.519




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Simplicity® Flange Bearings

Flange Bearings CFPM

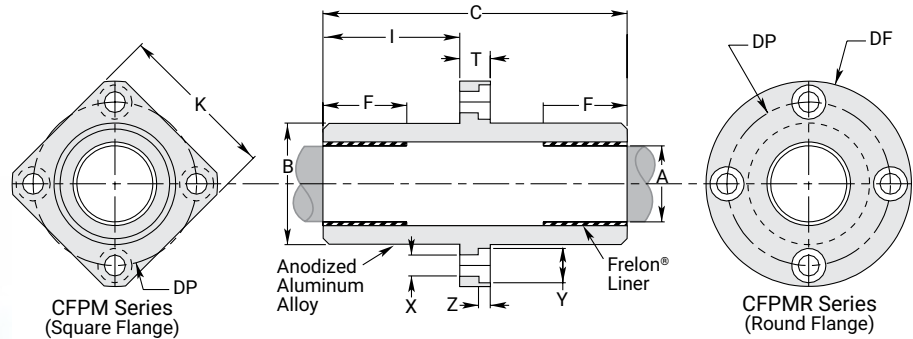

DIMENSIONAL INFORMATION

Precision I.D. Series Similar to Preloaded Ball Bearing				Compensated I.D. Series Similar to Standard Ball Bearing				Nominal Size	B Body O.D. H7			C Length		I Length to Fing.	F Length Each End	Effective Surface Area CM ²	MAX Static Load N	
Part No.		A Bearing I.D. F8		Part No.		A Bearing I.D.											Frelon®	
Square	Round	MIN	MAX	Square	Round	MIN	MAX		mm	MIN	MAX	MIN	MAX				CM ²	GOLD
CFPM08	CFPMR08	8.013	8.035	CFPM08C	CFPMR08C	8.063	8.085	8	15.982	16	45.7	46.3	19.0	12.1	2.027	4,179	2,099	
CFPM12	CFPMR12	12.016	12.043	CFPM12C	CFPMR12C	12.066	12.093	12	21.979	22	60.7	61.3	26.0	15.4	3.870	7,976	4,002	
CFPM16	CFPMR16	16.016	16.043	CFPM16C	CFPMR16C	16.066	16.093	16	25.979	26	67.7	68.3	29.5	20.4	6.836	14,087	7,073	
CFPM20	CFPMR20	20.020	20.053	CFPM20C	CFPMR20C	20.096	20.129	20	31.975	32	79.7	80.3	34.5	22.1	9.257	19,071	9,575	
CFPM25	CFPMR25	25.020	25.053	CFPM25C	CFPMR25C	25.096	25.129	25	39.975	40	111.7	112.3	50.5	33.1	17.331	35,708	17,933	
CFPM30	CFPMR30	30.020	30.053	CFPM30C	CFPMR30C	30.096	30.129	30	46.975	47	122.7	123.3	54.5	35.0	21.991	45,303	22,749	
CFPM40	CFPMR40	40.025	40.064	CFPM40C	CFPMR40C	40.127	40.166	40	61.970	62	150.7	151.3	66.5	44.0	36.861	75,939	38,131	
CFPM50	CFPMR50	50.025	50.064	CFPM50C	CFPMR50C	50.127	50.166	50	74.970	75	191.7	192.3	87.0	69.5	72.780	149,936	75,282	
CFPM60	CFPMR60	60.030	60.076	CFPM60C	CFPMR60C	60.182	60.228	60	89.965	90	208.7	209.3	92.5	73.0	91.735	188,980	94,892	

- Notes:** (1) Formula used for effective surface area is $(\pi * ID * L)/3$.
(2) MAX static load is effective surface area times MAX load for FrelonGOLD®.
(3) - 210 kgf/cm² is the rating for FrelonGOLD®; 105.45 kgf/cm² is the rating for Frelon J.
(4) Frelon pads in each end (F dimension).

MOUNTING DIMENSIONS

Part No.		K Square	DF O.D.	T Length	Dp Bolt Circle	X Hole	Y C'Bore Depth	Z C'Bore Depth	Clamping Bolt	Concentricity	Squareness	CFPM Weight Kg.	CFPMR Weight Kg.
Square	Round	MAX	MAX	MAX									
CFPM08	CFPMR08	25	32	8	24	3.5	6	3.1	M 3	0.015	0.015	0.027	0.031
CFPM12	CFPMR12	32	42	9	32	4.5	7.5	4.1	M 4	0.015	0.015	0.058	0.067
CFPM16	CFPMR16	35	46	9	36	4.5	7.5	4.1	M 4	0.015	0.015	0.077	0.088
CFPM20	CFPMR20	42	54	11	43	5.5	9	5.1	M 5	0.017	0.017	0.133	0.149
CFPM25	CFPMR25	50	62	11	51	5.5	9	5.1	M 5	0.017	0.017	0.270	0.286
CFPM30	CFPMR30	60	76	14	62	6.6	11	6.1	M 6	0.017	0.017	0.413	0.450
CFPM40	CFPMR40	75	98	18	80	9.0	14	8.1	M 8	0.020	0.020	0.846	0.942
CFPM50	CFPMR50	88	112	18	94	9.0	14	8.1	M 8	0.020	0.020	1.450	1.556
CFPM60	CFPMR60	106	134	24	112	11.0	17	11.1	M 10	0.025	0.025	2.329	2.519




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Simplicity® Die Set Bushings

Die Set Bushings PACM

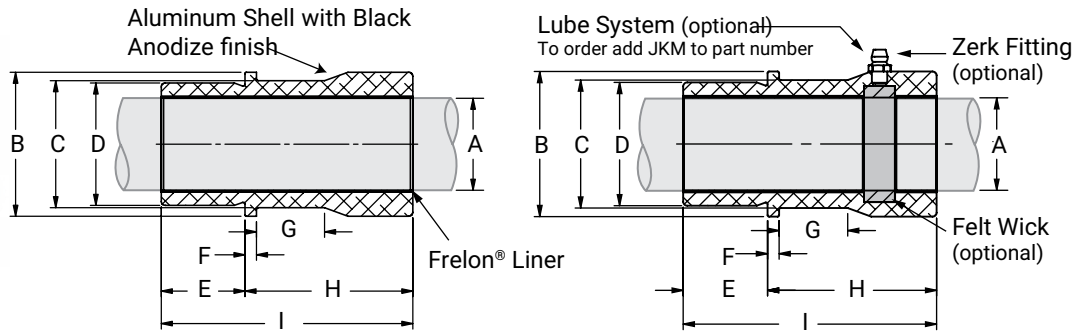

DIMENSIONAL INFORMATION



P = Precision C = Compensated		Nominal Size	A		B		C	D	E		F	G	H	I	Effective Surface Area	MAX Static Load N		Bearing Weight
	Part No.		Bearing I.D.		Flange & Barrel O.D. H7		Clamp Dia.	Pilot O.D. H7	MAX	Pilot Length	Flange Length	Recess Length	Head Length	Overall Length		CM ²	Frelon®	
		MIN	MAX	MIN	MAX	MIN	MIN	GOLD							J & W		Kg.	
P	PACMZ19	19	19.020	19.053	33.975	34	29	27.979	28	18		18	52	70	13.928	28,694	14,411	0.282
C	PACMZ19C		19.096	19.129														
P	PACMZ25	25	25.020	25.053	43.975	44	39	37.975	38	23		20	57	80	20.944	43,144	21,670	0.551
C	PACMZ25C		25.096	25.129														
P	PACMZ32	32	32.020	32.053	52.970	53	48	44.975	45	26		20	64	90	30.159	62,127	31,196	0.834
C	PACMZ32C		32.096	32.129														
P	PACMZ40	40	40.025	40.064	62.970	63	58	53.970	54	30	5	25	70	100	41.888	86,289	43,331	1.229
C	PACMZ40C		40.127	40.166														
P	PACMZ50	50	50.025	50.064	78.970	79	74	64.970	65	35		25	75	110	57.596	118,652	59,576	2.055
C	PACMZ50C		50.127	50.166														
P	PACMZ63	63	63.030	63.076	91.965	92	87	80.970	81	48		25	82	130	85.765	106,056	88,722	2.984
C	PACMZ63C		63.182	63.228														
P	PACMZ80	80	80.030	80.076	110.965	111	106	99.965	100	48		25	102	150	125.664	258,876	129,992	4.772
C	PACMZ80C		80.182	80.228														

- Notes: (1) Formula used for effective surface area is $(\pi * ID * L)/3$.
 (2) Shell material is aluminum..
 (3) For lubrication system add JKM, example: PACMZ750JKM.
 (4) MAX static load is effective surface area times max load for FrelonGOLD®.
 (5) – 210 kgf/cm² is the rating for FrelonGOLD;
 105.45 kgf/cm² is the rating for Frelon J.





Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series–page 52 Metric Series–page 94

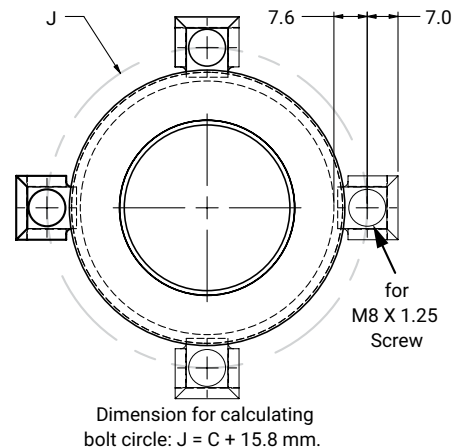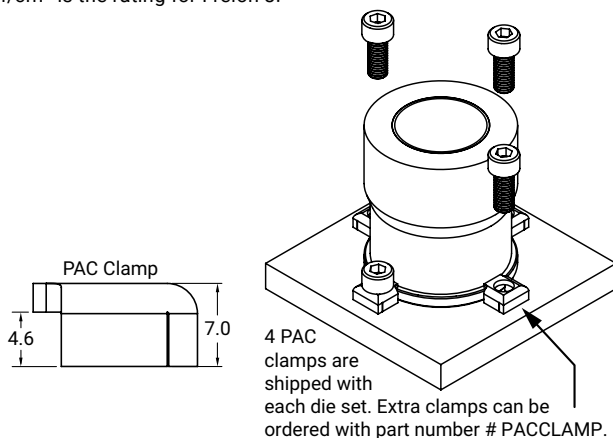

Simplicity® Sleeve Bearings

Sleeve Bearings PSM

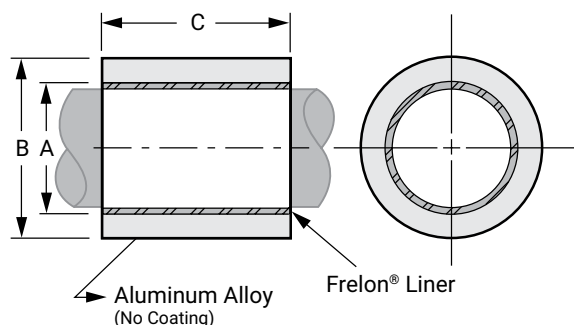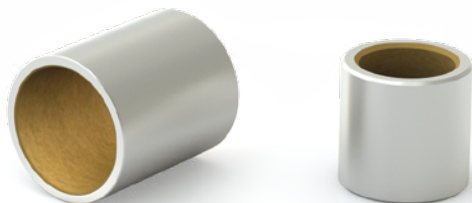

DIMENSIONAL INFORMATION

Part No.	Nominal Bearing Size			A Bearing I.D.		B O.D. S7		C Length		Max Static Load Kg. Frelon®		MAX Static Load N Frelon		Bearing Weight Kg	Recommended Housing Bore		Press Fit	
	I.D.	O.D.	Length	MIN	MAX	MIN	MAX	MIN	MAX	GOLD	J & W	GOLD	J & W		MIN.	MAX	MIN	MAX
PSM0610-06	6	10	6	6.028	6.058	10.023	10.038	5.75	6	76	38	745	373	0.00084	10.038	10.063	10.000	10.015
PSM0610-10	6	10	10	6.028	6.058	10.023	10.038	9.75	10	126	63	1,236	618	0.00140	10.038	10.063	10.000	10.015
PSM0812-08	8	12	8	8.033	8.066	12.028	12.046	7.75	8	134	67	1,314	657	0.00140	12.046	12.071	12.000	12.018
PSM0812-12	8	12	12	8.033	8.066	12.028	12.046	11.75	12	202	101	1,981	990	0.00210	12.046	12.071	12.000	12.018
PSM0814-08	8	14	8	8.033	8.066	14.028	14.046	7.75	8	134	67	1,314	657	0.00231	14.046	14.071	14.000	14.018
PSM0814-12	8	14	12	8.033	8.066	14.028	14.046	11.75	12	202	101	1,981	990	0.00347	14.046	14.071	14.000	14.018
PSM1014-10	10	14	10	10.033	10.066	14.028	14.046	9.75	10	210	105	2,059	1,030	0.00210	14.046	14.071	14.000	14.018
PSM1014-16	10	14	16	10.033	10.066	14.028	14.046	15.75	16	336	168	3,295	1,647	0.00336	14.046	14.071	14.000	14.018
PSM1216-12	12	16	12	12.034	12.070	16.028	16.046	11.75	12	302	151	2,961	1,481	0.00294	16.046	16.071	16.000	16.018
PSM1216-16	12	16	16	12.034	12.070	16.028	16.046	15.75	16	404	202	3,962	1,981	0.00392	16.046	16.071	16.000	16.018
PSM1519-16	15	19	16	15.034	15.070	19.035	19.056	15.75	16	504	252	4,942	2,471	0.00476	19.046	19.071	19.000	19.018
PSM1620-12	16	20	12	16.041	16.080	20.035	20.056	11.50	12	404	202	3,962	1,981	0.00378	20.056	20.081	20.000	20.021
PSM1620-16	16	20	16	16.041	16.080	20.035	20.056	15.50	16	538	269	5,276	2,638	0.00505	20.056	20.081	20.000	20.021
PSM1620-25	16	20	25	16.041	16.080	20.035	20.056	24.50	25	840	420	8,237	4,119	0.00788	20.056	20.081	20.000	20.021
PSM2025-16	20	25	16	20.042	20.084	25.034	25.057	15.50	16	672	336	6,590	3,295	0.00787	20.056	25.081	25.000	25.021
PSM2025-20	20	25	20	20.042	20.084	25.034	25.057	19.50	20	840	420	8,237	4,119	0.00984	20.056	25.081	25.000	25.021
PSM2025-25	20	25	25	20.042	20.084	25.034	25.057	24.50	25	1050	525	10,296	5,148	0.01230	20.056	25.081	25.000	25.021
PSM2025-30	20	25	30	20.042	20.084	25.034	25.057	29.50	30	1260	630	12,356	6,178	0.01476	20.056	25.081	25.000	25.021
PSM2530-20	25	30	20	25.042	25.084	30.035	30.056	19.50	20	1050	525	10,296	5,148	0.01202	30.056	30.081	30.000	30.021
PSM2530-25	25	30	25	25.042	25.084	30.035	30.056	24.50	25	1312	656	12,865	6,433	0.01503	30.056	30.081	30.000	30.021
PSM2530-30	25	30	30	25.042	25.084	30.035	30.056	29.50	30	1576	788	15,454	7,727	0.01803	30.056	30.081	30.000	30.021
PSM2535-25	25	35	25	25.042	25.084	35.043	35.068	24.50	25	1312	656	12,865	6,433	0.03276	35.068	35.093	35.000	35.021
PSM2535-35	25	35	35	25.042	25.084	35.043	35.068	34.50	35	1838	919	18,023	9,012	0.04586	35.068	35.093	35.000	35.021
PSM3035-25	30	35	25	30.050	30.096	35.043	35.068	24.50	25	1576	788	15,454	7,727	0.01777	35.068	35.093	35.000	35.021
PSM3035-30	30	35	30	30.050	30.096	35.043	35.068	29.50	30	1890	945	18,533	9,267	0.02133	35.068	35.093	35.000	35.021
PSM3040-35	30	40	35	30.050	30.096	40.043	40.068	34.50	35	2206	1103	21,632	10,816	0.05349	40.068	40.093	40.000	40.025
PSM3040-50	30	40	50	30.050	30.096	40.043	40.068	49.50	50	3150	1575	30,889	15,444	0.07641	40.068	40.093	40.000	40.025
PSM3545-25	35	45	25	35.052	35.102	45.041	45.067	24.50	25	1838	919	18,023	9,012	0.04365	45.068	45.093	45.000	45.025
PSM3545-40	35	45	40	35.052	35.102	45.041	45.067	39.50	40	2940	1470	28,830	14,415	0.06983	45.068	45.093	45.000	45.025
PSM3545-50	35	45	50	35.052	35.102	45.041	45.067	49.50	50	3676	1838	36,047	18,023	0.08729	45.068	45.093	45.000	45.025
PSM4050-30	40	50	30	40.052	40.102	50.043	50.068	29.50	30	2520	1260	24,711	12,356	0.05891	50.068	50.093	50.000	50.025
PSM4050-40	40	50	40	40.052	40.102	50.043	50.068	39.50	40	3360	1680	32,948	16,474	0.07855	50.068	50.093	50.000	50.025
PSM5060-35	50	60	35	50.062	50.133	60.053	60.099	34.50	35	3676	1838	36,047	18,023	0.08419	60.099	60.124	60.000	60.030
PSM5060-50	50	60	50	50.062	50.133	60.053	60.099	49.50	50	5250	2625	51,482	25,741	0.12027	60.099	60.124	60.000	60.030
PSM6070-60	60	70	60	60.063	60.139	70.053	70.099	59.50	60	7560	3780	74,133	37,067	0.17052	70.099	70.124	70.000	70.030




Consult Factory • 800-962-8979



Email an Application Engineer

Simplicity® Sleeve Bearings with Flange

Sleeve Bearings with Flange PSFM

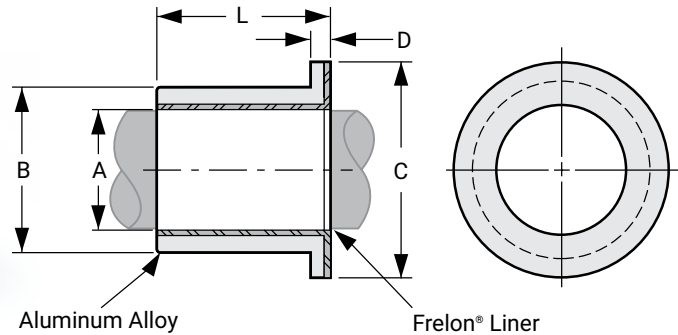

DIMENSIONAL INFORMATION

Part No.	Nominal Bearing Size mm			A Bearing I.D.		B O.D. S7		C Flange O.D.	D Flange Width	L Length		MAX Static Load Kg.		MAX Static Load N		Bearing Weight Kg	Recommended Housing Bore			
	I.D.	O.D.	Length	MIN	MAX	MIN	MAX			MIN	MAX	Frelon® GOLD	J & W	Frelon GOLD	J & W		Slip Fit & Epoxy	Press Fit		
PSFM0610-06	6	10	6	6.028	6.058	10.023	10.038	14	2	5.75	6	76	38	745	373	0.00126	10.038	10.063	10.00	10.015
PSFM0610-10	6	10	10	6.028	6.058	10.023	10.038	14	2	9.75	10	126	63	1,236	618	0.00182	10.038	10.063	10.00	10.015
PSFM0812-06	8	12	6	8.033	8.066	12.028	12.046	16	2	5.75	6	100	50	981	490	0.00153	12.046	12.071	12.00	12.018
PSFM0812-08	8	12	8	8.033	8.066	12.028	12.046	16	2	7.75	8	134	67	1,314	657	0.00189	12.046	12.071	12.00	12.018
PSFM0812-12	8	12	12	8.033	8.066	12.028	12.046	16	2	11.75	12	202	101	1,981	990	0.00259	12.046	12.071	12.00	12.018
PSFM1016-08	10	16	8	10.033	10.066	16.028	16.046	22	3	7.75	8	168	84	1,647	824	0.00421	16.046	16.071	16.00	16.018
PSFM1016-10	10	16	10	10.033	10.066	16.028	16.046	22	3	9.75	10	210	105	2,059	1,030	0.00489	16.046	16.071	16.00	16.018
PSFM1016-16	10	16	16	10.033	10.066	16.028	16.046	22	3	15.75	16	336	168	3,295	1,647	0.00694	16.046	16.071	16.00	16.018
PSFM1218-08	12	18	8	12.034	12.070	18.028	18.046	24	3	7.75	8	202	101	1,981	990	0.00478	18.046	18.071	18.00	18.018
PSFM1218-12	12	18	12	12.034	12.070	18.028	18.046	24	3	11.75	12	302	151	2,961	1,481	0.00636	18.046	18.071	18.00	18.018
PSFM1519-16	15	19	16	15.034	15.070	19.028	19.046	25	3	15.50	16	504	252	4,942	2,471	0.00647	19.046	19.071	19.00	19.018
PSFM1620-16	16	20	16	16.041	16.080	20.035	20.056	27	3	15.55	16	538	269	5,276	2,638	0.00718	20.056	20.081	20.00	20.021
PSFM1620-20	16	20	20	16.041	16.080	20.035	20.056	27	3	19.50	20	672	336	6,590	3,295	0.00844	20.056	20.081	20.00	20.021
PSFM1620-25	16	20	25	16.041	16.080	20.035	20.056	27	3	24.50	25	840	420	8,237	4,119	0.01002	20.056	20.081	20.00	20.021
PSFM2026-20	20	26	20	20.042	20.084	26.035	26.056	32	3	19.50	20	840	420	8,237	4,119	0.01432	26.056	26.081	26.00	26.021
PSFM2026-30	20	26	30	20.042	20.084	26.035	26.056	32	3	29.50	30	1,260	630	12,356	6,178	0.02035	26.056	26.081	26.00	26.021
PSFM2530-20	25	30	20	25.042	25.084	30.035	30.056	39	3.5	19.50	20	1,050	525	10,296	5,148	0.01672	30.056	30.081	30.00	30.021
PSFM2530-25	25	30	25	25.042	25.084	30.035	30.056	39	3.5	24.50	25	1,312	656	12,865	6,433	0.01973	30.056	30.081	30.00	30.021
PSFM2530-32	25	30	32	25.042	25.084	30.035	30.056	39	3.5	31.50	32	1,680	840	16,474	8,237	0.02394	30.056	30.081	30.00	30.021
PSFM3038-30	30	38	30	30.050	30.096	38.043	38.068	46	4	29.50	30	1,890	945	18,533	9,267	0.04145	38.068	38.093	38.00	38.021
PSFM3545-35	35	45	35	35.052	35.102	45.043	45.068	55	5	34.50	35	2,572	1,286	25,221	12,611	0.07192	45.068	45.093	45.00	45.025
PSFM4050-40	40	50	40	40.052	40.102	50.043	50.068	60	5	39.50	40	3,360	1,680	32,948	16,474	0.09044	50.068	50.093	50.00	50.025
PSFM5060-50	50	60	50	50.062	50.133	60.053	60.099	70	5	49.50	50	5,250	2,625	51,482	25,741	0.13429	60.099	60.124	60.00	60.030

ORDERING INFORMATION

PSM	16	20	-	16
Type	I.D.	O.D.		Length
PSM: Precision Sleeve Bearing	I.D. in mm	O.D. in mm		Length in mm
PSFM: Precision Sleeve Bearing with Flange	I.D. in mm	O.D. in mm		Length in mm

Note: Lengths not listed above must be specially quoted.



Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

INSTALLATION INSTRUCTIONS

1. Slip the bearing sleeve into the housing and epoxy into place with Loctite® or similar type bonding agent.




Do NOT let any of the adhesive touch the bearing liner. It will harden and interfere with the running clearance.

2. Freeze the bearings at 0°F (-17.75°C) for 30-45 minutes. Using gloves, remove the bearings from the freezer and slip them into the housing. As they heat to room temperature, full contact between the bearing and housing will be achieved. The greatest advantage to this technique over traditional pressing is greater accuracy in alignment.

Linear Ball Bearings Precision Plus Self Aligning

Self Aligning Ball Bearings EPS & EPS_OP

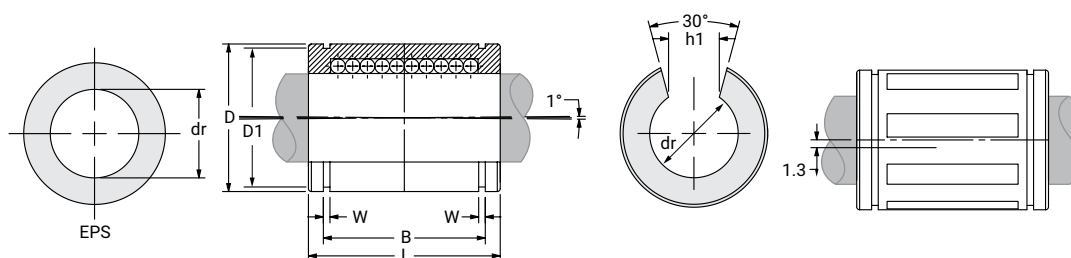

EPS – Self Aligning Closed

EPSxx-OP – Self Aligning Open




DIMENSIONAL INFORMATION

Part No. Self Aligning Closed	Nominal Diameter			Ball Circuit	Weight G	Major Dimensions & Tolerances							Load Ratings	
	Size mm	dr mm	Tolerance mm			D mm	L mm	Tolerance mm	B mm	Tolerance mm	W mm	D1 mm	Dynamic C N	Static Co N
EPS16	16	16	0/-0.013	5	26	26	36	0/-0.51	24.6	0/-0.51	1.30	24.9	1,140	710
EPS20	20	20	0/-0.013	6	60	32	45	0/-0.51	31.2	0/-0.51	1.60	30.5	2,280	1,400
EPS25	25	25	0/-0.013	6	120	40	58	0/-0.51	43.7	0/-0.51	1.85	38.5	3,800	2,740
EPS30	30	30	0/-0.013	6	184	47	68	0/-0.64	51.7	0/-0.64	1.85	44.5	4,710	2,800
EPS40	40	40	0/-0.013	6	342	62	80	0/-0.76	60.3	0/-0.76	2.15	58.5	6,500	5,460
EPS50	50	50	0/-0.013	6	586	75	100	0/-1.02	77.3	0/-1.02	2.65	71.5	11,460	7,940

Part No. Self Aligning Open	Nominal Diameter			Ball Circuit	Weight G	Major Dimensions & Tolerances									Load Ratings	
	Size mm	dr mm	Tolerance mm			D mm	L mm	Tolerance mm	B mm	Tolerance mm	W mm	D1 mm	H1 mm	J mm	Dynamic C N	Static Co N
EPS16-OP	16	16	0/-0.013	4	20	26	36	0/-0.51	24.6	0/-0.51	1.30	24.9	9.0	through	1,330	910
EPS20-OP	20	20	0/-0.013	5	50	32	45	0/-0.51	31.2	0/-0.51	1.60	30.5	9.0	0.039	2,310	1,445
EPS25-OP	25	25	0/-0.013	5	100	40	58	0/-0.51	43.7	0/-0.51	1.85	38.5	11.5	0.059	3,910	2,820
EPS30-OP	30	30	0/-0.013	5	154	47	68	0/-0.64	51.7	0/-0.64	1.85	44.5	14.0	0.047	4,850	2,900
EPS40-OP	40	40	0/-0.013	5	286	62	80	0/-0.76	60.3	0/-0.76	2.15	58.5	19.5	0.090	6,700	5,625
EPS50-OP	50	50	0/-0.013	5	486	75	100	0/-1.02	77.3	0/-1.02	2.65	71.5	22.5	0.090	11,700	8,100

Linear Ball Bearings Precision

Ball Bearings EP

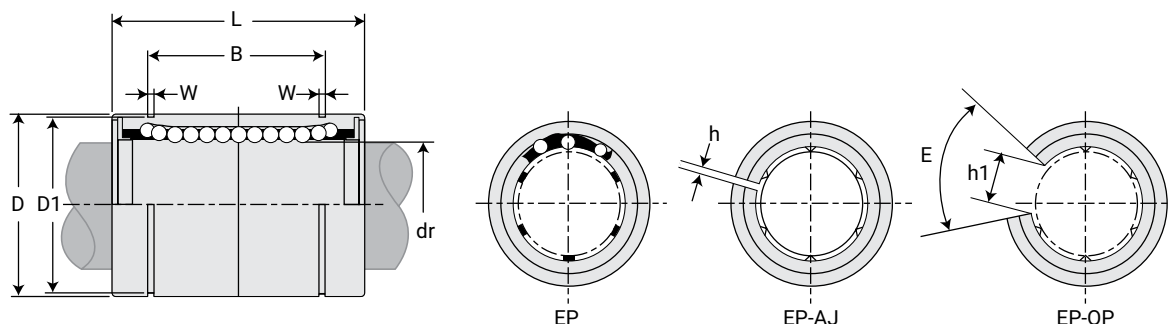

EP – Standard Closed



EPxx-AJ – Adjustable



EPxx-OP – Standard Open



DIMENSIONAL INFORMATION


(Standard Steel Finish)

Part No.			Nominal Diameter			Major Dimensions & Tolerances							
Standard Closed	Adjustable	Standard Open	Size mm	dr mm	Tolerance mm	Ball Circuit	Weight G	D mm	Tolerance mm	L mm	Tolerance mm	B mm	Tolerance mm
EP05G	-	-	5	5	+0.008/0	4	11	12	0/-0.008	22	0/-0.2	14.5	0/-0.2
EP08G	-	-	8	8	+0.008/0	4	20	16	0/-0.008	25	0/-0.2	16.5	0/-0.2
EP10G	-	-	10	10	+0.008/0	4	36	19	0/-0.009	29	0/-0.2	22	0/-0.2
EP12G	EP12G-AJ	EP12G-OP	12	12	+0.008/0	5	41	22	0/-0.009	32	0/-0.2	22.9	0/-0.2
EP16G	EP16G-AJ	EP16G-OP	16	16	+0.009/-0.001	5	65	26	0/-0.009	36	0/-0.2	24.9	0/-0.2
EP20G	EP20G-AJ	EP20G-OP	20	20	+0.009/-0.001	5	91	32	0/-0.011	45	0/-0.2	31.5	0/-0.2
EP25G	EP25G-AJ	EP25G-OP	25	25	+0.011/-0.001	6	215	40	0/-0.011	58	0/-0.3	44.1	0/-0.3
EP30G	EP30G-AJ	EP30G-OP	30	30	+0.011/-0.001	6	325	47	0/-0.011	68	0/-0.3	52.1	0/-0.3
EP40G	EP40G-AJ	EP40G-OP	40	40	+0.013/-0.002	6	705	62	0/-0.013	80	0/-0.3	60.6	0/-0.3
EP50G	EP50G-AJ	EP50G-OP	50	50	+0.013/-0.002	6	1130	75	0/-0.013	100	0/-0.3	77.6	0/-0.3

Part No.			Nominal Diameter			Major Dimensions & Tolerances							Load Ratings	
Standard Closed	Adjustable	Standard Open	Size mm	dr mm	Tolerance mm	W mm	D1 mm	H mm	H1 mm	E Slot Angle	MAX Eccentricity μm	MAX Radial Clearance μm	Dynamic C N	Static Co N
EP05G	-	-	5	5	+0.008/0	1.1	11.5	-	-	-	12	-5	200	260
EP08G	-	-	8	8	+0.008/0	1.1	15.2	-	-	-	12	-5	260	400
EP10G	-	-	10	10	+0.008/0	1.3	18	-	-	-	12	-5	372	549
EP12G	EP12G-AJ	EP12G-OP	12	12	+0.008/0	1.3	21	1.5	7.5	78°	12	-7	410	590
EP16G	EP16G-AJ	EP16G-OP	16	16	+0.009/-0.001	1.3	24.9	1.5	10	78°	12	-7	770	1,170
EP20G	EP20G-AJ	EP20G-OP	20	20	+0.009/-0.001	1.6	30.3	2	10	60°	15	-9	860	1,370
EP25G	EP25G-AJ	EP25G-OP	25	25	+0.011/-0.001	1.85	37.5	2	12.5	60°	15	-9	980	1,560
EP30G	EP30G-AJ	EP30G-OP	30	30	+0.011/-0.001	1.85	44.5	2	12.5	50°	15	-9	1,560	2,740
EP40G	EP40G-AJ	EP40G-OP	40	40	+0.013/-0.002	2.15	59	3	16.8	50°	17	-13	2,150	4,010
EP50G	EP50G-AJ	EP50G-OP	50	50	+0.013/-0.002	2.65	72	3	21	50°	17	-13	3,820	7,930

Linear Ball Bearings Double Wide

Double Wide Ball Bearings EP-W

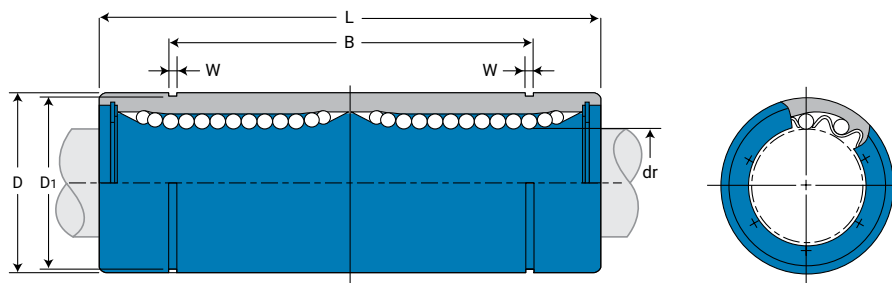

DIMENSIONAL INFORMATION

(Standard Steel Finish)

Part No.	Nominal Diameter			Ball Circuit	Weight G	Major Dimensions & Tolerances					
	Size mm	dr mm	Tolerance mm			D mm	Tolerance mm	L mm	Tolerance mm	B mm	Tolerance mm
Standard Closed											
EP08GW	8	8	+0.009/-0.001	4	40	16	0/-0.009	45	0/-0.3	33	0/-0.3
EP12GW	12	12	+0.009/-0.001	4	80	22	0/-0.011	61	0/-0.3	45.8	0/-0.3
EP16GW	16	16	+0.011/-0.001	5	115	26	0/-0.011	68	0/-0.3	49.8	0/-0.3
EP20GW	20	20	+0.011/-0.001	5	180	32	0/-0.013	80	0/-0.3	61	0/-0.3
EP25GW	25	25	+0.013/-0.002	6	430	40	0/-0.013	112	0/-0.4	82	0/-0.4
EP30GW	30	30	+0.013/-0.002	6	615	47	0/-0.013	123	0/-0.4	104.2	0/-0.4
EP40GW	40	40	+0.016/-0.004	6	1400	62	0/-0.015	151	0/-0.4	121.2	0/-0.4
EP50GW	50	50	+0.016/-0.004	6	2320	75	0/-0.020	192	0/-0.4	155.2	0/-0.4

Part No.	Nominal Diameter			Major Dimensions & Tolerances			Load Ratings	
	Size mm	dr mm	Tolerance mm	W mm	D1 mm	MAX Eccentricity μm	Dynamic C N	Static Co N
Standard Closed								
EP08GW	8	8	+0.009/-0.001	1.1	15.2	15	421	804
EP12GW	12	12	+0.009/-0.001	1.3	21	15	813	1,570
EP16GW	16	16	+0.011/-0.001	1.3	24.9	15	921	1,780
EP20GW	20	20	+0.011/-0.001	1.6	30.3	17	1,370	2,740
EP25GW	25	25	+0.013/-0.002	1.85	38	17	1,570	3,140
EP30GW	30	30	+0.013/-0.002	1.85	44.5	17	2,500	5,490
EP40GW	40	40	+0.016/-0.004	2.15	59	20	3,430	8,040
EP50GW	50	50	+0.016/-0.004	2.65	72	20	6,080	15,900



Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94


Linear Ball Bearings Pillow Blocks

INCH

ISO METRIC

JIS METRIC


Ball Bearings – Closed Pillow Blocks EPPM

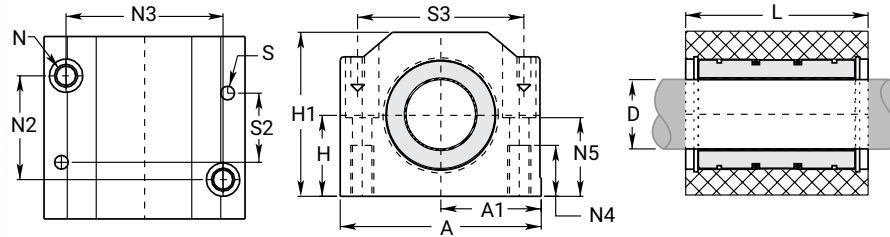

Part No.	D Nom. Brg. I.D. mm	H Centerline +/- 0.015 mm	H1 Height mm	A Width mm	A1 Centerline +/- 0.013 mm	L Length mm	N Bolt									Load Ratings	
								N2	N3	N4	N5	S	S2	S3	Assem. WT. Kg.	Dynamic C N	Static Co N
EPPM08G	8	15	28	35	17.5	32	M4 x 0.7	20	25	9	14.5	N/A	N/A	N/A	0.069	260	400
EPPM10G	10	16	31.5	40	20	36	M5 x 0.8	20	29	11	15	4	29	31	0.095	372	549
EPPM12G	12	18	35	43	21.5	39	M5 x 0.8	23	32	11	16.5	4	32	34	0.118	410	590
EPPM16G	16	22	42	53	26.5	43	M6 x 1.0	26	40	13	21	4	35	42	0.200	770	1,170
EPPM20G	20	25	50	60	30	54	M8 x 1.25	32	45	18	24	5	45	50	0.329	860	1,370
EPPM25G	25	30	60	78	39	67	M10 x 1.5	40	60	22	29	6	20	64	0.655	980	1,560
EPPM30G	30	35	71	87	43.5	79	M10 x 1.5	45	68	22	34	6	30	72	1.020	1,560	2,740
EPPM40G	40	45	91	108	54	91	M12 x 1.75	58	86	26	44	8	35	90	1.846	2,150	4,010
EPPM50G	50	50	105	132	66	113	M16 x 2.0	50	105	34	49	10	42	108	3.169	3,820	7,930

- Notes:** (1) Standard pillow block assembly includes self-aligning housing.
 (2) All standard metric pillow blocks use standard EP series bearings.
 (3) Straight bore pillow block assembly includes standard EP series bearing in straight bore housing.

Ball Bearings – Open Pillow Blocks EPPMN

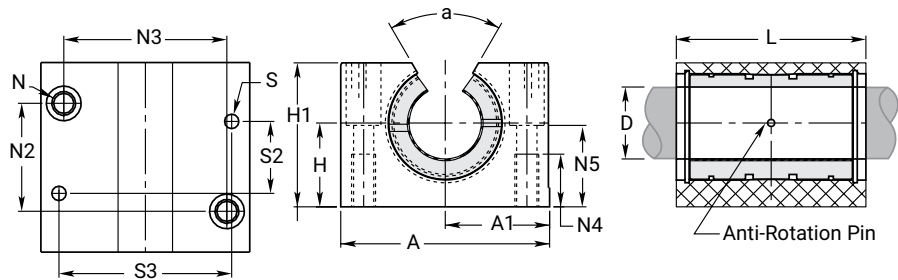


Part No.	D Nom. BRG. I.D.	H Centerline +/- 0.015	H1 Height	A Width	A1 Centerline +/- 0.013	L Length	N									Assem. WT. Kg.	Load Ratings	
	Precision	mm	mm	mm	mm	mm	Bolt	N2 mm	N3 mm	N4 mm	N5 mm	S mm	S2 mm	S3 mm	A mm		Dynamic C N	Static Co N
EPPMN12G	12	18	28	43	21.5	39	M5 x 0.8	23	32	11	16.5	4	32	34	66	0.096	410	590
EPPMN16G	16	22	35	53	26.5	43	M6 x 1.0	26	40	13	21	4	35	42	68	0.162	770	1,170
EPPMN20G	20	25	42	60	30	54	M8 x 1.25	32	45	18	24	5	45	50	60	0.267	860	1,370
EPPMN25G	25	30	51	78	39	67	M10 x 1.5	40	60	22	29	6	20	64	60	0.536	980	1,560
EPPMN30G	30	35	60	87	43.5	79	M10 x 1.5	45	68	22	34	6	30	72	60	0.831	1,560	2,740
EPPMN40G	40	45	77	108	54	91	M12 x 1.75	58	86	26	44	8	35	90	60	1.499	2,150	4,010
EPPMN50G	50	50	88	132	66	113	M16 x 2.0	50	105	34	49	10	42	108	60	2.539	3,820	7,930

- Notes:** (1) Standard pillow block assembly includes self-aligning housing.
 (2) All standard metric pillow blocks use standard EP series bearings.

Linear Ball Bearings Square Flange Mount

Ball Bearings – Square Flange Mount EPK

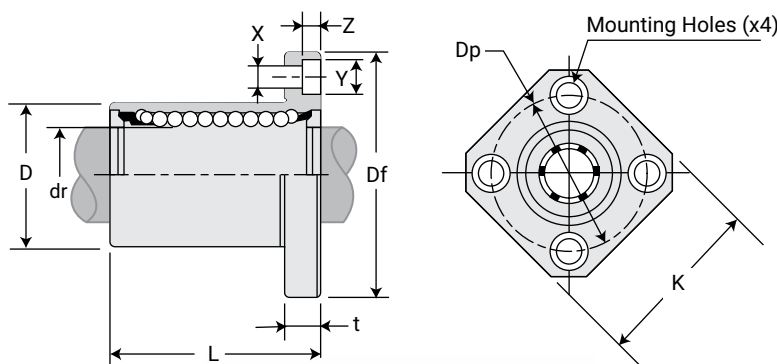

DIMENSIONAL INFORMATION

(Standard Steel Finish)

Part No. Standard Polymer Cage	Nominal Diameter			Ball Circuit	Weight G	Major Dimensions & Tolerances			
	Size mm	dr mm	Tolerance mm			D mm	Tolerance mm	L mm	Tolerance mm
EPK08G	8	8	+0.008/0	4	41	16	0/-0.013	25	±0.3
EPK12G	12	12	+0.008/0	4	80	22	0/-0.016	32	±0.3
EPK16G	16	16	+0.009/-0.001	5	103	26	0/-0.016	36	±0.3
EPK20G	20	20	+0.009/-0.001	5	182	32	0/-0.019	45	±0.3
EPK25G	25	25	+0.011/-0.001	6	335	40	0/-0.019	58	±0.3
EPK30G	30	30	+0.011/-0.001	6	560	47	0/-0.019	68	±0.3
EPK40G	40	40	+0.013/-0.002	6	1175	62	0/-0.022	80	±0.3
EPK50G	50	50	+0.013/-0.002	6	1745	75	0/-0.022	100	±0.3

Part No. Standard Polymer Cage	Nominal Diameter			Major Dimensions & Tolerances – Flange									Load Ratings	
	Size mm	dr mm	Tolerance mm	Df mm	K mm	T mm	DP mm	X mm	Y mm	Z mm	Eccentricity μm	Squareness μm	Dynamic C N	Static Co N
EPK08G	8	8	+0.008/0	32	25	5	24	3.5	6.5	3.1	12	12	265	402
EPK12G	12	12	+0.008/0	42	32	6	32	4.5	8	4.1	12	12	510	784
EPK16G	16	16	+0.009/-0.001	46	35	6	36	4.5	8	4.1	12	12	578	892
EPK20G	20	20	+0.009/-0.001	54	42	8	43	5.5	9.3	5.1	15	15	862	1,370
EPK25G	25	25	+0.011/-0.001	62	50	8	51	5.5	9.3	5.1	15	15	980	1,570
EPK30G	30	30	+0.011/-0.001	76	60	10	62	6.6	11	6.1	15	15	1,570	2,740
EPK40G	40	40	+0.013/-0.002	98	75	13	80	9	14	8.1	17	17	2,160	4,020
EPK50G	50	50	+0.013/-0.002	112	88	13	94	9	14	8.1	17	17	3,820	7,940




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Linear Ball Bearings Round Flange Mount

Ball Bearings – Round Flange Mount EPF

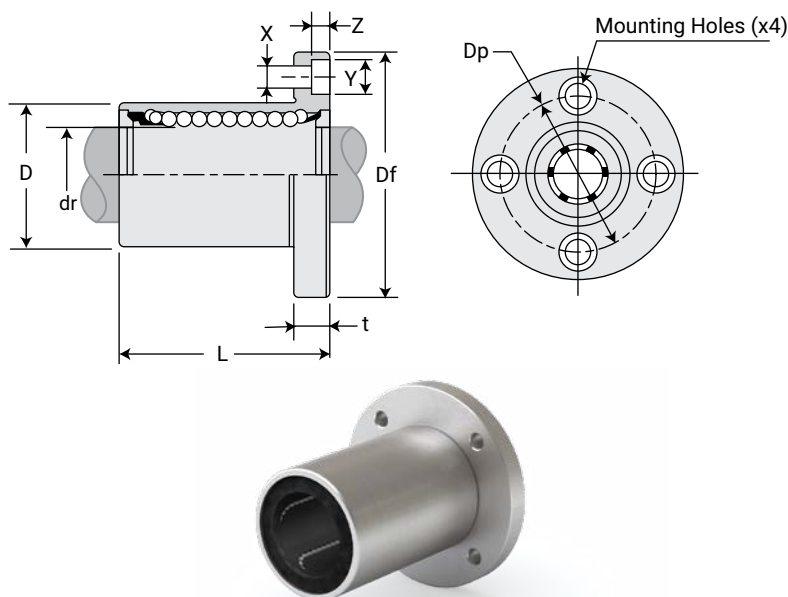

DIMENSIONAL INFORMATION

(Standard Steel Finish)

Part No. Standard Polymer Cage	Nominal Diameter			Ball Circuit	Weight G	Major Dimensions & Tolerances			
	Size mm	dr mm	Tolerance mm			D mm	Tolerance mm	L mm	Tolerance mm
EPF08G	8	8	+0.008/0	4	41	16	0/-0.013	25	±0.3
EPF12G	12	12	+0.008/0	4	80	22	0/-0.016	32	±0.3
EPF16G	16	16	+0.009/-0.001	5	103	26	0/-0.016	36	±0.3
EPF20G	20	20	+0.009/-0.001	5	182	32	0/-0.019	45	±0.3
EPF25G	25	25	+0.011/-0.001	6	335	40	0/-0.019	58	±0.3
EPF30G	30	30	+0.011/-0.001	6	560	47	0/-0.019	68	±0.3
EPF40G	40	40	+0.013/-0.002	6	1175	62	0/-0.022	80	±0.3
EPF50G	50	50	+0.013/-0.002	6	1745	75	0/-0.022	100	±0.3

Part No. Standard Polymer Cage	Nominal Diameter			Major Dimensions & Tolerances – Flange								Load Ratings	
	Size mm	dr mm	Tolerance mm	Df mm	T mm	Dp mm	X mm	Y mm	Z mm	Eccentricity μm	Squareness μm	Dynamic C N	Static Co N
EPF08G	8	8	+0.008/0	32	5	24	3.5	6.5	3.1	12	12	265	402
EPF12G	12	12	+0.008/0	42	6	32	4.5	8	4.1	12	12	510	784
EPF16G	16	16	+0.009/-0.001	46	6	36	4.5	8	4.1	12	12	578	892
EPF20G	20	20	+0.009/-0.001	54	8	43	5.5	9.3	5.1	15	15	862	1,370
EPF25G	25	25	+0.011/-0.001	62	8	51	5.5	9.3	5.1	15	15	980	1,570
EPF30G	30	30	+0.011/-0.001	76	10	62	6.6	11	6.1	15	15	1,570	2,740
EPF40G	40	40	+0.013/-0.002	98	13	80	9	14	8.1	17	17	2,160	4,020
EPF50G	50	50	+0.013/-0.002	112	13	94	9	14	8.1	17	17	3,820	7,940




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Linear Ball Bearings Double Wide

Double Wide Ball Bearings – Square Flange Mount EPK-W

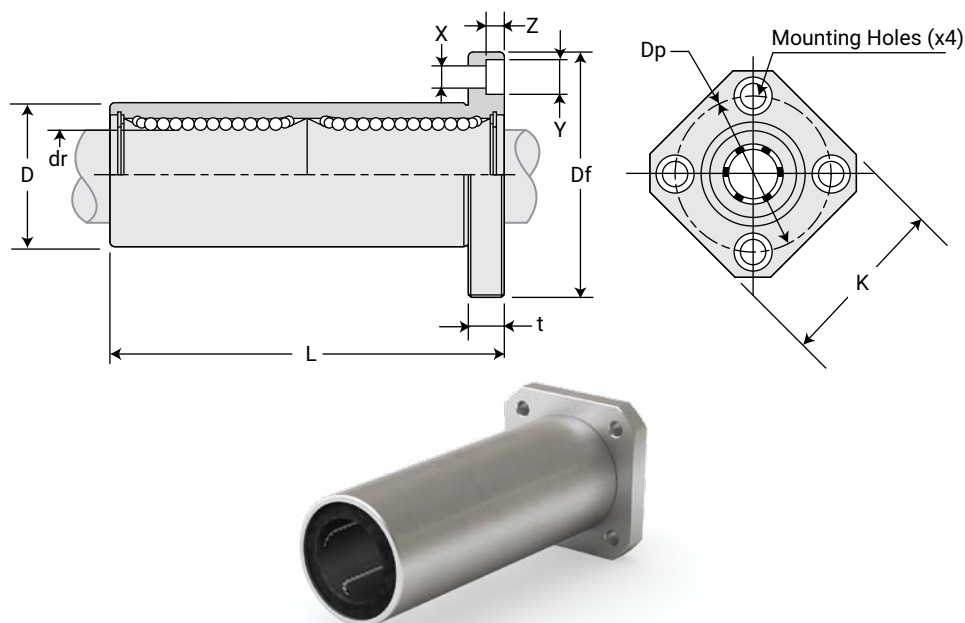

DIMENSIONAL INFORMATION

(Standard Steel Finish)

Part No.	Nominal Diameter			Ball Circuit	Weight G	Major Dimensions & Tolerances			
	Size mm	dr mm	Tolerance mm			D mm	Tolerance mm	L mm	Tolerance mm
EPK08GW	8	8	+0.009/-0.001	4	51	16	0/-0.013	45	±0.3
EPK12GW	12	12	+0.009/-0.001	4	90	22	0/-0.016	61	±0.3
EPK16GW	16	16	+0.011/-0.001	5	135	26	0/-0.016	70	±0.3
EPK20GW	20	20	+0.011/-0.001	5	225	32	0/-0.019	80	±0.3
EPK25GW	25	25	+0.013/-0.002	6	500	40	0/-0.019	112	±0.3
EPK30GW	30	30	+0.013/-0.002	6	720	47	0/-0.019	123	±0.3
EPK40GW	40	40	+0.016/-0.004	6	1600	62	0/-0.022	154	±0.3
EPK50GW	50	50	+0.016/-0.004	6	2620	75	0/-0.022	192	±0.3

Part No.	Nominal Diameter			Major Dimensions & Tolerances – Flange									Load Ratings	
	Size mm	dr mm	Tolerance mm	Df mm	K mm	T mm	Dp mm	X mm	Y mm	Z mm	Eccentricity μ m	Squareness μ m	Dynamic C N	Static Co N
EPK08GW	8	8	+0.009/-0.001	32	25	5	24	3.5	6.5	3.1	15	15	421	804
EPK12GW	12	12	+0.009/-0.001	42	32	6	32	4.5	8	4.1	15	15	813	1,570
EPK16GW	16	16	+0.011/-0.001	46	35	6	36	4.5	8	4.1	15	15	921	1,780
EPK20GW	20	20	+0.011/-0.001	54	42	8	43	5.5	9.3	5.1	17	17	1,370	2,740
EPK25GW	25	25	+0.013/-0.002	62	50	8	51	5.5	9.3	5.1	17	17	1,570	3,140
EPK30GW	30	30	+0.013/-0.002	76	60	10	62	6.6	11	6.1	17	17	2,500	5,490
EPK40GW	40	40	+0.016/-0.004	98	75	13	80	9	14	8.1	20	20	3,430	8,040
EPK50GW	50	50	+0.016/-0.004	112	88	13	94	9	14	8.1	20	20	6,080	15,900




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series–page 52 Metric Series–page 94

Linear Ball Bearings Double Wide

Double Wide Ball Bearings – Round Flange Mount EPF-W

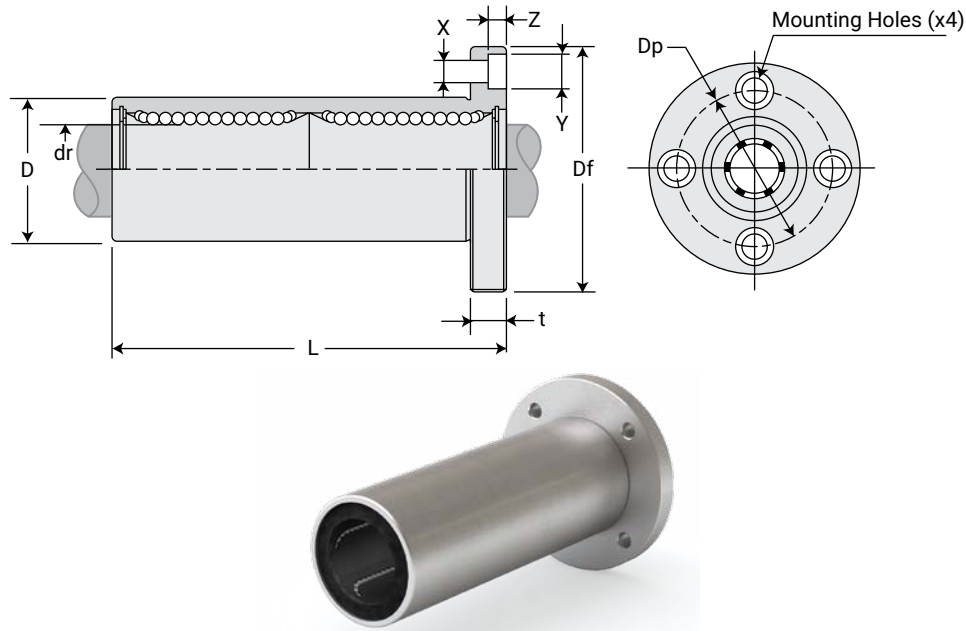

DIMENSIONAL INFORMATION

(Standard Steel Finish)

Part No. Standard Polymer Cage	Nominal Diameter			Ball Circuit	Weight G	Major Dimensions & Tolerances			
	Size mm	dr mm	Tolerance mm			D mm	Tolerance mm	L mm	Tolerance mm
EPF08GW	8	8	+0.009/-0.001	4	59	16	0/-0.013	46	±0.3
EPF12GW	12	12	+0.009/-0.001	4	110	22	0/-0.016	61	±0.3
EPF16GW	16	16	+0.011/-0.001	5	160	26	0/-0.016	68	±0.3
EPF20GW	20	20	+0.011/-0.001	5	260	32	0/-0.019	80	±0.3
EPF25GW	25	25	+0.013/-0.002	6	540	40	0/-0.019	112	±0.3
EPF30GW	30	30	+0.013/-0.002	6	815	47	0/-0.019	123	±0.3
EPF40GW	40	40	+0.016/-0.004	6	1805	62	0/-0.022	154	±0.3
EPF50GW	50	50	+0.016/-0.004	6	2820	75	0/-0.022	192	±0.3

Part No. Standard Polymer Cage	Nominal Diameter			Major Dimensions & Tolerances – Flange								Load Ratings	
	Size mm	dr mm	Tolerance mm	Df mm	T mm	Dp mm	X mm	Y mm	Z mm	Eccentricity μm	Squareness μm	Dynamic C N	Static Co N
EPF08GW	8	8	+0.009/-0.001	32	5	24	3.5	6.5	3.1	15	15	421	804
EPF12GW	12	12	+0.009/-0.001	42	6	32	4.5	8	4.1	15	15	813	1,570
EPF16GW	16	16	+0.011/-0.001	46	6	36	4.5	8	4.1	15	15	921	1,780
EPF20GW	20	20	+0.011/-0.001	54	8	43	5.5	9.3	5.1	17	17	1,370	2,740
EPF25GW	25	25	+0.013/-0.002	62	8	51	5.5	9.3	5.1	17	17	1,570	3,140
EPF30GW	30	30	+0.013/-0.002	76	10	62	6.6	11	6.1	17	17	2,500	5,490
EPF40GW	40	40	+0.016/-0.004	98	13	80	9	14	8.1	20	20	3,430	8,040
EPF50GW	50	50	+0.016/-0.004	112	13	94	9	14	8.1	20	20	6,080	15,900




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series–page 52 Metric Series–page 94

Linear Ball Bearings Square Flange Center Mount

Ball Bearings – Square Flange Center Mount EPKC

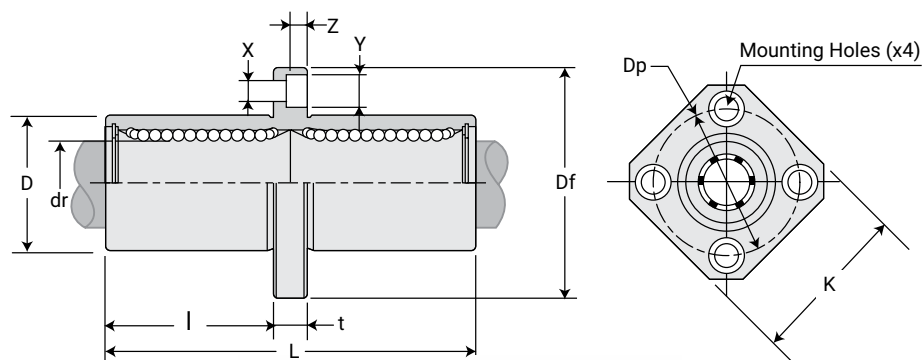

DIMENSIONAL INFORMATION

(Standard Steel Finish)

Part No. Standard Polymer Cage	Nominal Diameter			Ball Circuit	Weight G	Major Dimensions & Tolerances			
	Size mm	dr mm	Tolerance μm			D mm	Tolerance μm	L mm	Tolerance μm
EPKC08G	8	8	+9/-1	4	51	16	0/-13	45	±300
EPKC12G	12	12	+9/-1	4	90	22	0/-16	57	±300
EPKC16G	16	16	+11/-1	5	135	26	0/-16	70	±300
EPKC20G	20	20	+11/-1	5	225	32	0/-19	80	±300
EPKC25G	25	25	+13/-2	6	500	40	0/-19	112	±300
EPKC30G	30	30	+13/-2	6	720	47	0/-19	123	±300
EPKC40G	40	40	+16/-4	6	1600	62	0/-22	154	±300
EPKC50G	50	50	+16/-4	6	2620	75	0/-22	192	±300

Part No. Standard Polymer Cage	Nominal Diameter			Major Dimensions & Tolerances – Flange										Load Ratings	
	Size mm	dr mm	Tolerance μm	I mm	Df mm	K mm	T mm	Dp mm	X mm	Y mm	Z mm	Eccentricity μm	Squareness μm	Dynamic C N	Static Co N
EPKC08G	8	8	+9/-1	20.5	32	25	5	24	3.5	6.5	3.1	15	15	421	804
EPKC12G	12	12	+9/-1	27.5	42	32	6	32	4.5	8	4.1	15	15	813	1,570
EPKC16G	16	16	+11/-1	31	46	35	6	36	4.5	8	4.1	15	15	921	1,780
EPKC20G	20	20	+11/-1	36	54	42	8	43	5.5	9.3	5.1	17	17	1,370	2,740
EPKC25G	25	25	+13/-2	52	62	50	8	51	5.5	9.3	5.1	17	17	1,570	3,140
EPKC30G	30	30	+13/-2	56.5	76	60	10	62	6.6	11	6.1	17	17	2,500	5,490
EPKC40G	40	40	+16/-4	69	98	75	13	80	9	14	8.1	20	20	3,430	8,040
EPKC50G	50	50	+16/-4	89.5	112	88	13	94	9	14	8.1	20	20	6,080	15,900




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series–page 52 Metric Series–page 94

Linear Ball Bearings Round Flange Center Mount

Ball Bearings – Round Flange Center Mount EPFC

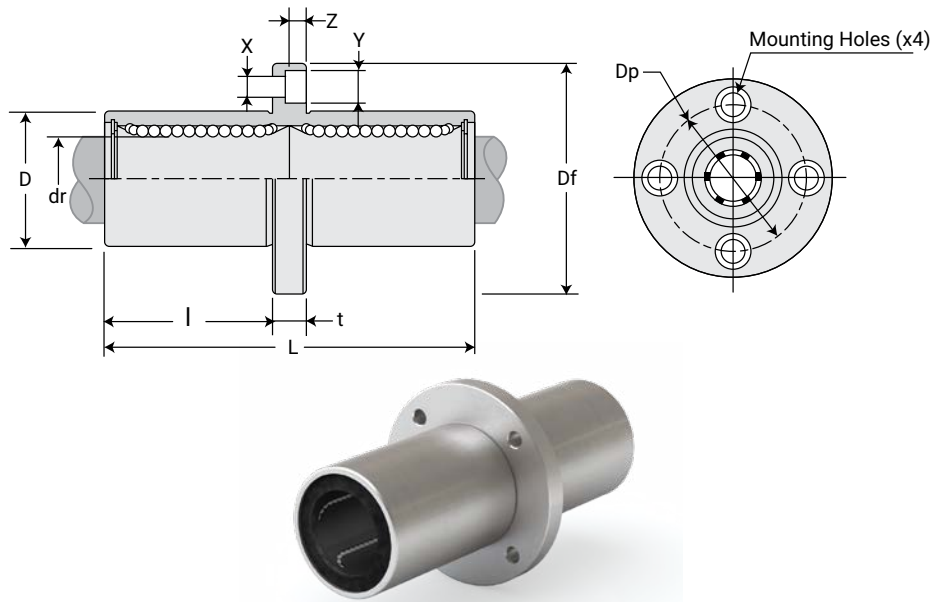

DIMENSIONAL INFORMATION

(Standard Steel Finish)

Part No.	Nominal Diameter			Ball Circuit	Weight G	Major Dimensions & Tolerances			
	Size mm	dr mm	Tolerance μm			D mm	Tolerance μm	L mm	Tolerance μm
EPFC08G	8	8	+9/-1	4	59	16	0/-13	45	± 300
EPFC12G	12	12	+9/-1	4	110	22	0/-16	61	± 300
EPFC16G	16	16	+11/-1	5	160	26	0/-16	68	± 300
EPFC20G	20	20	+11/-1	5	260	32	0/-19	80	± 300
EPFC25G	25	25	+13/-2	6	540	40	0/-19	112	± 300
EPFC30G	30	30	+13/-2	6	815	47	0/-19	123	± 300
EPFC40G	40	40	+16/-4	6	1805	62	0/-22	154	± 300
EPFC50G	50	50	+16/-4	6	2820	75	0/-22	192	± 300

Part No.	Nominal Diameter			Major Dimensions & Tolerances – Flange									Load Ratings	
	Size mm	dr mm	Tolerance μm	I mm	Df mm	T mm	Dp mm	X mm	Y mm	Z mm	Eccentricity μm	Squareness μm	Dynamic C N	Static Co N
EPFC08G	8	8	+9/-1	20.5	32	5	24	3.5	6.5	3.1	15	15	421	804
EPFC12G	12	12	+9/-1	27.5	42	6	32	4.5	8	4.1	15	15	813	1,570
EPFC16G	16	16	+11/-1	31	46	6	36	4.5	8	4.1	15	15	921	1,780
EPFC20G	20	20	+11/-1	36	54	8	43	5.5	9.3	5.1	17	17	1,370	2,740
EPFC25G	25	25	+13/-2	52	62	8	51	5.5	9.3	5.1	17	17	1,570	3,140
EPFC30G	30	30	+13/-2	56.5	76	10	62	6.6	11	6.1	17	17	2,500	5,490
EPFC40G	40	40	+16/-4	69	98	13	80	9	14	8.1	20	20	3,430	8,040
EPFC50G	50	50	+16/-4	89.5	112	13	94	9	14	8.1	20	20	6,080	15,900




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Linear Ball Bearings Compact Thin Wall

Ball Bearings – Compact Thin Wall KHP

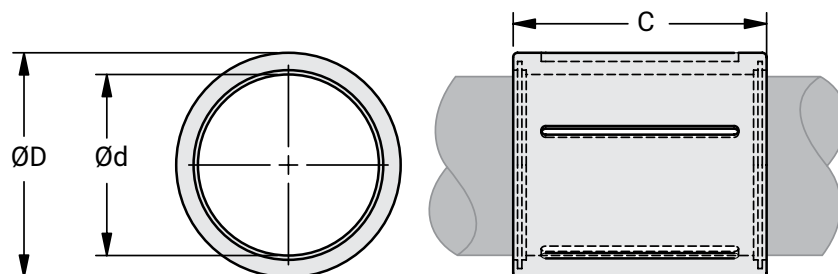

DIMENSIONAL INFORMATION

(Standard Steel Finish)

Part No.	Dimensions							Load Rating	
	Ød	Tolerance	ØD	Tolerance	C	Tolerance	Weight	Dynamic C	Static Co
	mm	µm	mm	µm	mm	µm	G	N	N
KHP06	6	0/+12	12	-11/0	22	-520/0	7	400	239
KHP08	8	0/+15	15	-11/0	24	-520/0	12	435	280
KHP10	10	0/+15	17	-11/0	26	-520/0	14.5	500	370
KHP12	12	0/+18	19	-13/0	28	-520/0	18.5	620	510
KHP14	14	0/+18	21	-13/0	28	-520/0	20.5	620	520
KHP16	16	0/+18	24	-13/0	30	-520/0	27.5	800	620
KHP20	20	0/+21	28	-13/0	30	-520/0	32.5	950	790
KHP25	25	0/+21	35	-16/0	40	-620/0	66	1,990	1,670
KHP30	30	0/+21	40	-16/0	50	-620/0	95	2,880	2,700
KHP40	40	0/+25	52	-19/0	60	-740/0	182	4,400	4,450
KHP50	50	0/+25	62	-19/0	70	-740/0	252	5,500	6,300



Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Roller Pillow Block Bearings




INCH

ISO METRIC

JIS METRIC

Single Roller Pillow Block

MSPB-OPN

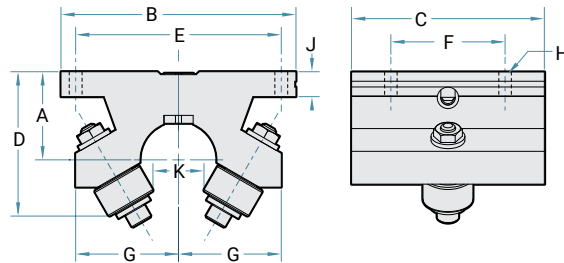


Dimensions and Load Ratings Metric Shafting

Part Number	Shaft Diameter mm	DYN. Load Rating N	Weight g	A ±0.08 mm	B mm	C mm	D mm	E ±0.13 mm	F ±0.13 mm	G mm	H Bolt Hole mm	J mm	K mm
MSPB-16-OPN	16	2224	226	22.2758	63.50	44.450	35.719	53.975	28.575	26.988	#8 4.763	6.858	9.525
MSPB-20-OPN	20	2669	275	24.2824	69.85	47.625	39.688	60.325	31.750	26.988	#8 4.763	7.620	11.113
MSPB-25-OPN	25	4248	453	29.9466	82.55	66.675	50.800	73.025	44.450	34.925	#10 5.558	9.144	17.463
MSPB-30-OPN	30	6228	907	37.2110	101.60	85.725	65.088	88.900	50.800	44.450	#10 5.558	10.770	20.638

Double Roller Pillow Block

MDPB-OPN

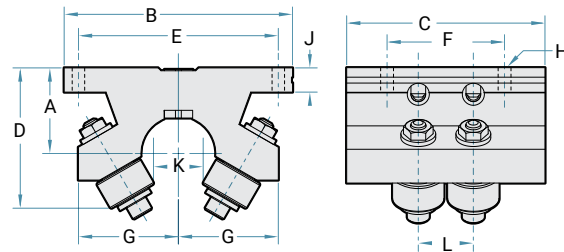


Dimensions and Load Ratings Metric Shafting

Part Number	Shaft Diameter mm	DYN. Load Rating N	Weight g	A ±0.08 mm	B mm	C mm	D mm	E ±0.13 mm	F ±0.13 mm	G mm	H Bolt Hole mm	J mm	K mm	L mm
MDPB-16-OPN	16	4448	317	22.2758	63.50	63.500	35.719	53.975	50.80	26.988	#8 4.763	6.858	9.525	14.2748
MDPB-20-OPN	20	5338	362	24.2824	69.85	66.675	39.688	60.325	31.75	26.988	#8 4.763	7.620	11.113	14.2748
MDPB-25-OPN	25	8496	544	29.9466	82.55	66.675	50.800	73.025	44.45	34.925	#10 5.558	9.144	17.463	18.2880
MDPB-30-OPN	30	12455	360	37.2110	101.60	85.725	65.088	88.900	50.80	44.450	#10 5.558	10.770	20.638	23.7998

Twin Roller Pillow Block

MTWN-OPN

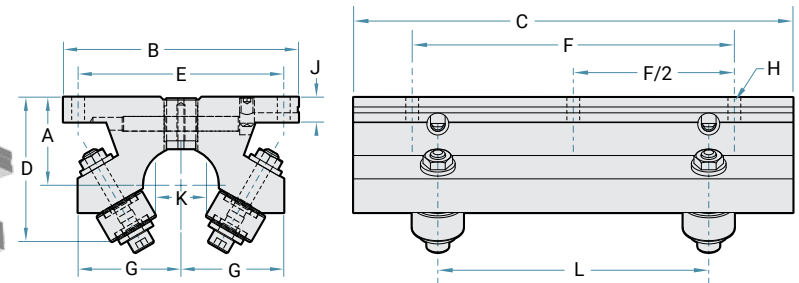

Dimensions and Load Ratings Metric Shafting

Part Number	Shaft Diameter mm	DYN. Load Rating N	Weight. g	A ±0.08 mm	B mm	C mm	D mm	E ±0.13 mm	F ±0.13 mm	G in.	H Bolt Hole mm	J mm	K mm	L mm
MTWN-16-OPN	16	4448	454	22.2758	63.50	101.6	35.719	53.975	76.2	26.988	#8 4.763	6.858	9.53	53.975
MTWN-20-OPN	20	5338	544	24.2824	69.85	114.3	39.688	60.325	88.9	26.988	#8 4.763	7.620	11.11	63.500
MTWN-25-OPN	25	8496	1043	29.9466	82.55	152.4	50.800	73.025	114.3	34.925	#10 5.558	9.144	17.46	95.250
MTWN-30-OPN	30	12455	1995	37.2110	101.60	190.5	65.088	88.900	139.7	44.450	#10 5.558	10.770	20.64	117.475

Simplicity 60 Plus® Shafting

PBC Linear®, formulated a linear shaft designed specifically for optimal bearing performance – 60 Plus Shafting. Advanced process capabilities maintain the ideal surface finish for linear bearings resulting in the longest life and highest performing shaft-to-bearing combination available.

Optimized surface finish

Faster break-in and better Frelon® transfer for plain bearings

Longest life possible, less down time, and maintenance

Straight to within 0.001" to 0.002" per foot cumulative, except on 3/8" diameter and smaller



See Pages 59–60 for machining options.



Metric Shaft Part • Numbering Chart



Configure Online

Special

CM - Custom Machine
SL - Specified Length

Shaft Length

Millimeter - 0000

Shaft Material

No Entry - 1060 CS

SS - 440 SS

SS420 - 420 SS

SS316 - 316 SS*

CP - Chrome plate**

AR - Armoloy**

* 300 Series available in most diameters

**Available as special quotes

Note: Chrome will have a guaranteed thickness of 0.0001" to 0.0005". Chrome thickness will be in addition to the catalog diameter of the shaft.

Code	Class Description
NIM	Metric Shaft (Steel)
NIPDM	Metric Predrill (Steel)
CCM	Feather Metric (Aluminum)
CCMDL	Feather Metric Predrill (Aluminum)
SRM	Metric Support Rail (Aluminum)
SRAM	Metric Support Rail Assembly (Aluminum)
LSRM	Metric Low Support Rail (Steel)
LSGM	Metric Low Support Rail Assembly (Steel)

Code	Diameter Desc.
04	4 mm
05	5 mm
06	6 mm
08	8 mm
10	10 mm
12	12 mm
16	16 mm
20	20 mm
25	25 mm
30	30 mm
40	40 mm
50	50 mm
60	60 mm
80	80 mm

Sample Part Numbers

Stainless Steel (SS) 20 mm diameter and 300 mm long

NIM20SS-0300-SL

Feather metric 12 mm diameter and 150 mm long

CCM12-0150-SL

Round Shafting RC60 Steel & Stainless Steel

Simplicity
60 PLUS
SHAFTING

Simplicity® 60 Plus® Shafting

PBC Linear's® development team, working in close conjunction with engineers from Lee Linear®, have together formulated a linear shaft designed specifically for optimal bearing performance – Simplicity 60 Plus Shafting. Advanced process capabilities maintain the ideal surface finish for linear bearings resulting in the longest life and highest performing shaft-to-bearing combination available.

- Optimized surface finish
- Faster break-in and better Frelon® transfer for plain bearings
- Longest life possible, less down time, and maintenance
- Straight to within 0.001" to 0.002" per foot cumulative, except on 3/8" diameter and smaller



RC60 Steel Solid Shafting NIM

Part No.	Nominal Dia. mm	Dia. Tolerance mm		MAX Length mm	MIN Hardness Depth mm	Weight Kg/M
		MIN	MAX			
NIM04-xxxx	4	3.987	4	6,400	0.69	0.10
NIM05-xxxx	5	4.987	5	6,400	0.69	0.15
NIM06-xxxx	6	5.987	6	6,400	0.69	0.23
NIM08-xxxx	8	7.987	8	6,400	0.69	0.39
NIM10-xxxx	10	9.987	10	6,400	0.69	0.62
NIM12-xxxx	12	11.987	12	3,900	1.02	0.89
NIM16-xxxx	16	15.987	16	3,900	1.02	1.57
NIM20-xxxx	20	19.987	20	3,900	1.52	2.45
NIM25-xxxx	25	24.987	25	4,300	2.03	3.80
NIM30-xxxx	30	29.987	30	3,900	2.03	5.50
NIM40-xxxx	40	39.984	40	3,900	2.03	9.80
NIM50-xxxx	50	49.984	50	3,900	2.54	15.30
NIM60-xxxx	60	59.981	60	3,900	2.54	22.20
NIM80-xxxx	80	79.981	80	3,550	2.54	39.50

- RC 60 Plus case hardened steel shafting
- Optimized for Simplicity® bearings and linear ball bearings
- Available cut-to-length or full lengths
- Length tolerance:
4 mm – 30 mm shaft = +/- 0.8 mm
40 mm – 50 mm shaft = +/- 1.6 mm
60 mm – 80 mm shaft = +/- 3.2 mm
- Joinable for longer lengths
- Available as solid shafting or pre-drilled (See pre-drilled NIPDM on next page)



Notes: (1) Specify length in part number using millimeters.
Example: for 25 mm shafting total length 900 mm = NIM25-0900.
(2) Surface finish bearing recommended 8 Ra.

440 & 420 Stainless Steel Solid Shafting NIMxxSS & NIMxxSS420

Part No.		Nominal Size mm	Dia. Tolerance mm		MAX Length mm	MIN Hardness Depth mm	Weight Kg/M
440 SS	420 SS		MIN	MAX			
NIM04SS-xxxx	NIM04SS420-xxxx	4	3.987	4	6,400	0.69	0.10
NIM05SS-xxxx*	NIM05SS420-xxxx*	5	4.987	5	6,400	0.69	0.15
NIM06SS-xxxx	NIM06SS420-xxxx	6	5.987	6	6,400	0.69	0.23
NIM08SS-xxxx	NIM08SS420-xxxx	8	7.987	8	6,400	0.69	0.39
NIM10SS-xxxx	NIM10SS420-xxxx	10	9.987	10	6,400	0.69	0.62
NIM12SS-xxxx	NIM12SS420-xxxx	12	11.987	12	3,900	1.02	0.89
NIM16SS-xxxx	NIM16SS420-xxxx	16	15.987	16	3,900	1.02	1.57
NIM20SS-xxxx	NIM20SS420-xxxx	20	19.987	20	3,900	1.52	2.45
NIM25SS-xxxx	NIM25SS420-xxxx	25	24.987	25	4,300	2.03	3.80
NIM30SS-xxxx	NIM30SS420-xxxx	30	29.987	30	3,900	2.03	5.50
NIM40SS-xxxx	NIM40SS420-xxxx	40	39.984	40	3,900	2.03	22.20
NIM50SS-xxxx	NIM50SS420-xxxx	50	49.984	50	3,900	2.54	39.50

- 440 & 420 stainless steel RC 50 Plus™ hardness
- Optimized for Simplicity bearings and linear ball bearings
- Available cut-to-length or random lengths
- Length tolerance:
4 mm – 30 mm shaft = +/- 0.8 mm
40 mm – 50 mm shaft = +/- 1.6 mm
60 mm – 80 mm shaft = +/- 3.2 mm
- Available as solid shafting or pre-drilled (See NIPDMxxSS on next page)




Email an Application Engineer

*Limited availability on NIM05SS, please contact factory.

Pre-Drilled & Tapped

Steel **NIPDM** • 440 Stainless Steel **NIPDMxxSS** • 420 Stainless Steel **NIPDMxxSS420**

Part No.			Nominal Dia. mm	Dia. Tolerance mm		Standard Hole Spacing		Thread	Max Length mm	Weight Kg/M
Steel	440 SS	420 SS		MIN	MAX	X	Y			
NIPDM12-xxxx	NIPDM12SS-xxxx	NIPDM12SS420-xxxx	12	11.9888	12	120	60	M4 x 0.7	4,597	0.89
NIPDM16-xxxx	NIPDM16SS-xxxx	NIPDM16SS420-xxxx	16	15.9893	16	150	75	M5 x 0.8	4,597	1.57
NIPDM20-xxxx	NIPDM20SS-xxxx	NIPDM20SS420-xxxx	20	19.9873	20	150	75	M6 x 1.0	4,597	2.45
NIPDM25-xxxx	NIPDM25SS-xxxx	NIPDM25SS420-xxxx	25	24.9885	25	200	100	M8 x 1.25	4,902	3.80
NIPDM30-xxxx	NIPDM30SS-xxxx	NIPDM30SS420-xxxx	30	29.9872	30	200	100	M10 x 1.5	4,597	5.50
NIPDM40-xxxx	NIPDM40SS-xxxx	NIPDM40SS420-xxxx	40	39.9872	40	200	100	M10 x 1.5	4,496	9.80
NIPDM50-xxxx	NIPDM50SS-xxxx	NIPDM50SS420-xxxx	50	49.9846	50	200	100	M12 x 1.75	4,496	15.30



Notes: (1) Specify length in part number using mm.



Example: for 12 mm shafting total length 97 mm = NIPDM12-0097.

(2) Customer specifies 'y' dimension, if different than standard. Hole-to-hole tolerance = ± 0.015 ".

(3) Consult factory for chrome plated, 303, or 316 stainless steel shafting.

Ceramic Coated **CCM**

- Aluminum alloy base material
- RC 70 ceramic coated finish
- Designed to run with Simplicity® FrelonGOLD® lined bearings
- Interchanges with solid and pre-drilled shafting
- Non-magnetic and vibration resistant
- Weld splatter, paints, and contaminants will not stick
- NOT compatible with linear ball bearings
- Length tolerance:
4 mm – 30 mm shaft = ± 0.8 mm
40 mm – 50 mm shaft = ± 1.6 mm
60 mm – 80 mm shaft = ± 3.2 mm

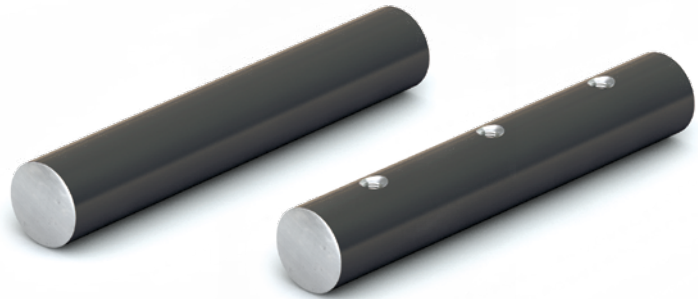

Solid Shafting **CCM**

Part No.	Nominal Dia. mm	Dia. Tolerance mm		MAX Length mm	Weight Kg/M
		MIN	MAX		
CCM06-xxxx	6	5.992	6	3,500	0.04
CCM08-xxxx	8	7.991	8	3,500	0.07
CCM10-xxxx	10	9.991	10	3,500	0.10
CCM12-xxxx	12	11.989	12	3,500	0.15
CCM16-xxxx	16	15.989	16	3,500	0.26
CCM20-xxxx	20	19.987	20	3,500	0.41
CCM25-xxxx	25	24.987	25	3,500	0.63
CCM30-xxxx	30	29.987	30	3,500	0.92
CCM40-xxxx	40	39.984	40	3,500	1.63
CCM50-xxxx	50	49.984	50	3,500	2.55

Notes: (1) Specify length in part number using mm.

Example: for 8 mm shafting total length 97 mm = CCM08-0097.

(2) Ends of cut-to-length shafting are not coated.

(3) Fully coated shafting is available on special request.

Pre-Drilled & Tapped **CCMDL**

Part No.	Nominal Dia. mm	Dia. Tolerance mm		Standard Hole Spacing		Thread	MAX Length mm	Weight Kg/M
		MIN	MAX	X	Y			
CCMDL08-xxxx	8	7.991	8	101.6	50.8	M2 x 0.4	3,500	0.07
CCMDL10-xxxx	10	9.991	10	101.6	50.8	M3 x 0.5	3,500	0.10
CCMDL12-xxxx	12	11.989	12	120	60	M4 x 0.7	3,500	0.15
CCMDL16-xxxx	16	15.989	16	150	75	M5 x 0.8	3,500	0.26
CCMDL20-xxxx	20	19.987	20	150	75	M6 x 1.0	3,500	0.41
CCMDL25-xxxx	25	24.987	25	200	100	M8 x 1.25	3,500	0.63
CCMDL30-xxxx	30	29.987	30	200	100	M10 x 1.5	3,500	0.92

Notes: (1) Specify length in part number using mm.

Example: for 10 mm shafting total length 97 mm = CCMDL08-0097.

(2) Ends of cut-to-length shafting are not coated.

(3) Fully coated shafting is available on special request.

(4) Customer specifies 'y' dimension, if different than standard.

Shafting Rail Assemblies

Simplicity
60 PLUS
SHAFTING

INCH

ISO METRIC

JIS METRIC

Rail Assembly – Aluminum Support Rail SRAM

Two piece assembly RC60 steel shaft and aluminum support rail standard

Other shaft materials – 440 stainless steel, 420 stainless steel, and ceramic coated aluminum

Standard length tolerances are provided on page 51

No coating



Part No.			Nominal Dia. MM	Diameter Tolerance		A +/-0.05	B	C	D	E	F Hole Size	Standard Hole Spacing		Weight Kg/M
Shaft Size	Material**	Length		MIN	MAX							x	y	
SRAM12	_____	-----SL	12	11.9888	12	28.00	43.00	6.60	4.76	29	M4	120	60	1.80
SRAM16	_____	-----SL	16	15.9893	16	28.50	48.00	7.94	6.35	33	M5	150	75	2.59
SRAM20	_____	-----SL	20	19.9873	20	38.00	56.00	9.53	6.35	37	M6	150	75	3.61
SRAM25	_____	-----SL	25	24.9885	25	42.00	60.00	12.70	6.35	42	M8	200	100	5.86
SRAM30	_____	-----SL	30	29.9872	30	53.00	74.00	14.29	7.94	51	M10	200	100	8.80
SRAM40	_____	-----SL	40	39.9872	40	64.00	78.00	17.46	9.53	55	M10	200	100	12.70
SRAM50	_____	-----SL	50	49.9846	50	70.00	82.00	20.30	10.50	62	M12	200	100	21.98

● Part Numbers are complete when **Material** and **Length** are added.
Default material is 1060 steel when no Material is specified.

For other steel options add below code into **Material location:

CC Ceramic Coated Shafting
SS 440 Stainless Steel
SS420 420 Stainless Steel

Note: Specify length in part number using millimeters.

Example: for 20 mm shafting total length 914 mm long = SRAM20-0914-SL.

Customer specifies 'y' dimension, if different than standard.


Contact PBC Linear for other available hole patterns.

* For diameter tolerances on Ceramic Coated Shafting, see tables on page 92.


Example 1: The Complete Part Number for a 1 inch diameter 440 Stainless Steel shaft of 240 mm is SRAM16SS-0240-SL

Support Rail – Aluminum SRM & SRM_PD

Non-Drilled (SRM)

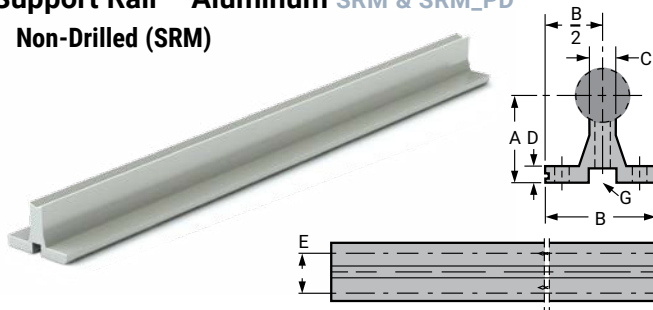

Pre-Drilled (SRMxxPD)

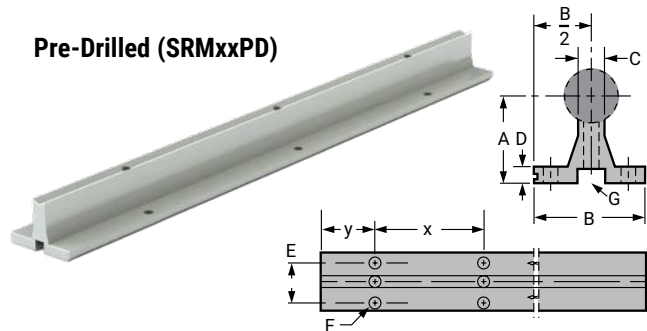

Part No.		Nominal Dia. MM	A +/-0.05	B	C	D	E	H Hole Size	G Mounting Bolt Size		MAX Length +0/-3.2 mm	Standard Hole Spacing		Weight Kg/M
Non-Drilled	Pre-Drilled								Screw	Fastener Length mm		x	y	
SRM12	SRM12PD	12	28.00	43.00	6.60	4.76	29	M4	M4 x 0.70	20	1,200	120	60	0.954
SRM16	SRM16PD	16	28.50	48.00	7.94	6.35	33	M5	M5 x 0.80	20	1,200	150	75	1.151
SRM20	SRM20PD	20	38.00	56.00	9.53	6.35	37	M6	M6 x 1.00	30	1,200	150	75	1.689
SRM25	SRM25PD	25	42.00	60.00	12.70	6.35	42	M8	M8 x 1.25	40	1,200	200	100	1.923
SRM30	SRM30PD	30	53.00	74.00	14.29	7.94	51	M10	M10 x 1.5	40	1,200	200	100	2.986
SRM40	SRM40PD	40	64.00	78.00	17.46	9.53	55	M10	M10 x 1.5	50	1,200	200	100	3.739
SRM50	SRM50PD	50	70.00	82.00	20.30	10.50	62	M12	M12 x 1.75	70	1,200	200	100	3.959

Notes: (1) Specify length in part number. **Example:** for 12 mm shafting support rail to 609 mm length = SRM12-0609 (Aluminum alloy construction, no coating).

(2) Shafts and support rails sold separately. Customer specifies 'y' dimension. Shaft rails and assemblies are available in long lengths, consult factory.

Shafting Low Support Rails


Low Support Rail – Steel LSRM

The AISI C-1018 steel LSRM shaft support is a low support rail with a reduced footprint, and 40% lower profile than other support rails. This is an excellent choice for applications requiring compact low shaft support. The standard length for LSRM type supports is 1200 mm.

No coating

Length tolerance
+0 mm/3 mm.


*LSRM Sizes 20–50 have red areas taken out of rail profile.



Part No.	Assembly Part No.	Shaft Dia. mm	A +/-0.05	B +/-0.05	C +/-0.05	D Hole Size	Standard Hole spacing pre-drilled		Weight per 1219 mm (approximate) Kg	Assembly Weight per 1200 mm (approximate) Kg
							X	Y		
LSRM12	LSRAM-12	12	13.91	9.40	8.66	M4	120	60	0.599	1.79
LSRM12PD										
LSRM16	LSRAM-16	16	17.54	11.43	10.46	M5	150	75	0.884	2.76
LSRM16PD										
LSRM20	LSRAM-20	20	19.58	12.95	10.50	M6	150	75	1.020	3.61
LSRM20PD										
LSRM25	LSRAM-25	25	25.22	17.53	13.88	M8	200	100	1.980	5.86
LSRM25PD										
LSRM30	LSRAM-30	30	29.26	19.81	15.30	M10	200	100	2.480	8.80
LSRM30PD										
LSRM40	LSRAM-40	40	35.96	23.62	17.46	M10	200	100	3.340	12.70
LSRM40PD										
LSRM50	LSRAM-50	50	44.02	29.97	21.00	M12	200	100	5.030	21.98
LSRM50PD										

How to order


- Available as cut to length options up to a max length of 3657 mm.
Example: 1200 mm would be LSRM16-1200-SL
- If standard mounting holes are required, specify low shaft rails with pre-drilled mounting holes by part number.
Example: LSRM12PD. Hole sizes and spacings are shown in the table.
- If other than standard hole spacing is required, please provide drawings with all dimensions, tolerances, and quantity. With or without mounting holes, low shaft rails will be supplied in 1200 mm lengths when ordered by part number.

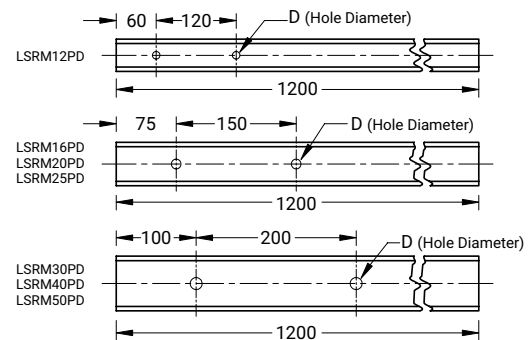

Low Support Rail & Shaft Set LSGM

Precision case hardened and ground shaft, plus an LSR steel support rail, effectively doubles the life of the shaft by allowing it to be turned over for a fresh surface when wear becomes evident. Both sides of the shaft are counterbored so the shaft may be rotated 180°, and rebolted for use on the new side. This guide is sold as a two-piece set; the shaft and support are not assembled. The guide is then bolted down through the top of the shaft to reduce installation time. The shafts are also available in 400 series stainless steel. Drilled through and counterbored shafts may not be suitable for all linear bearings.

No coating

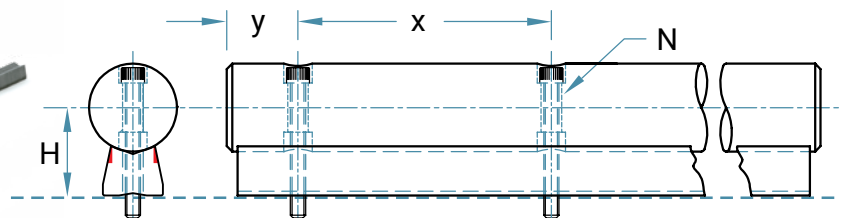

Note: Customer specifies 'y' dimension.

Part No.	Shaft Dia. mm	H mm	B mm	Y mm	X mm	N mm	Weight per in. Kg
LSGM16	16	17.54	11.43	75	150	M5	2.36
LSGM20	20	19.58	12.95	75	150	M6	3.05
LSGM25	25	25.22	17.53	100	200	M8	5.55
LSGM30	30	29.26	19.81	100	200	M10	8.11
LSGM40	40	35.96	23.62	100	200	M10	11.43
LSGM50	50	44.02	29.97	100	200	M12	19.98


End Support Blocks Square & Round

Aluminum End Support Block **MSB**

End support blocks provide stable support at the ends or at intermediate points along a shaft. Made from lightweight yet durable aluminum, they are compatible with all shaft types. These end blocks are best suited for applications where shaft deflection between supports is not a concern.

Available in metric sizes from 8–50 mm

Instant bolt-down installation

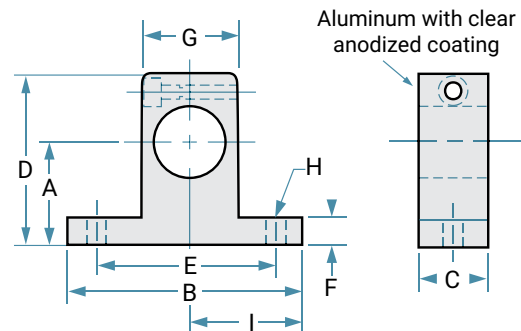


Part No.	Nominal Dia. mm.	A +/- 0.001	B	C	D	E +/- 0.001	F	G	H Bolt	Hole	I +/- 0.001	Weight Kg.
MSB08	8	20.02	42	14	32.80	32	6	18	M5	5.50	21.05	0.024
MSB10	10	20.02	42	14	32.80	32	6	18	M5	5.50	21.05	0.023
MSB12	12	23.02	42	14	38.00	32	6	20	M5	5.50	21.05	0.027
MSB16	16	27.02	48	16	44.00	38	8	25	M5	5.50	24.05	0.044
MSB20	20	31.02	60	20	51.00	45	10	30	M6	6.60	30.05	0.077
MSB25	25	35.02	70	24	60.00	56	12	38	M6	6.60	35.05	0.133
MSB30	30	42.02	84	28	70.00	64	12	44	M8	9.00	42.05	0.205
MSB40	40	60.02	114	36	96.00	90	15	60	M10	11.00	57.05	0.494
MSB50	50	70.02	126	40	120.00	100	18	74	M12	14.00	63.05	0.798

Flanged Mount Shaft Support **RMSB**

Flanged mount shaft supports help position and secure a linear shaft while preventing both rotational and axial movement. Constructed from lightweight, durable aluminum, they are compatible with all shaft types. These support blocks can also provide overhead clearance when end mounted.

Available in inch sizes from 8–50 mm


Instant bolt-down installation

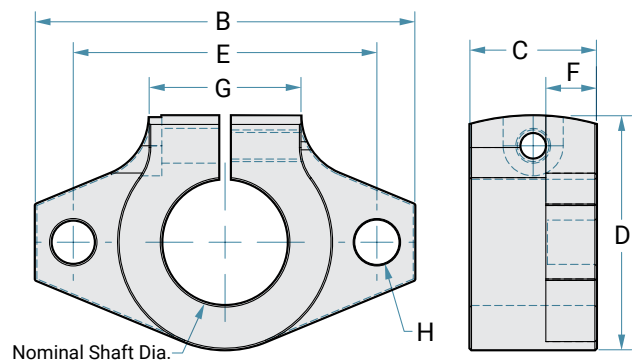

Part No.	Nominal Dia. mm	B	C	D	E +/- 0.001	F	G	H Bolt	Hole	Weight Kg.
RMSB08	8	43	10	24	32	5	15.00	M5	5.50	0.012
RMSB10	10	43	10	24	32	5	15.00	M5	5.50	0.010
RMSB12	12	47	13	28	36	7	15.50	M5	5.50	0.019
RMSB16	16	50	16	31	40	8	19.50	M5	5.50	0.027
RMSB20	20	60	20	37	48	8	24.00	M6	7.00	0.045
RMSB25	25	70	25	42	56	10	26.00	M6	7.00	0.067
RMSB30	30	80	30	50	64	12	29.50	M8	9.00	0.113
RMSB40	40	102	40	67	80	16	39.00	M10	12.00	0.242
RMSB50	50	122	50	83	96	19	41.50	M12	14.00	0.417

Simplicity® Linear Plain Bearings

Linear Plain Bearing FJ & FJN

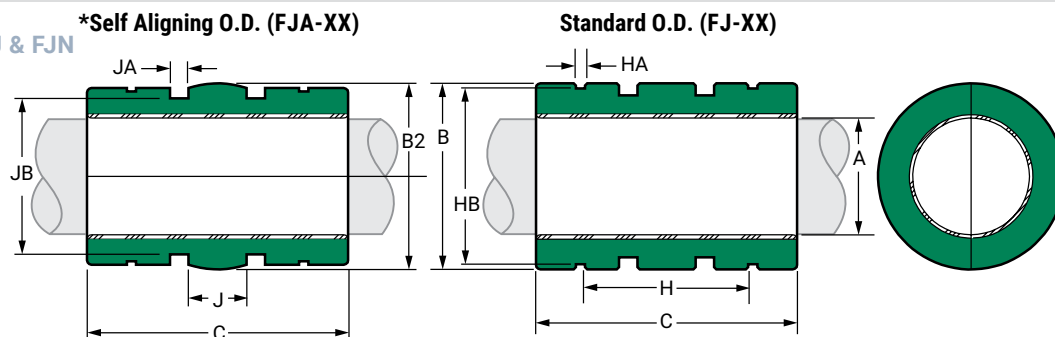

* Except for the O.D., bearings with the self-aligning feature have the same dimensions and tolerances as the standard bearing. There is a spherical crown on the O.D. to create the self-aligning feature. They are for use in a straight bore housing. Add an "A" to the part number for self-aligning bearings.

DIMENSIONAL INFORMATION


Precision I.D. Series Similar to Preloaded Ball Bearing					Compensated I.D. Series Allows Additional Running Clearance				B		B2		C		Concentric	Bearing Weight Kg.
Part No.	Nominal Size	A Bearing I.D.	A		Part No.	Nominal Size	A Bearing I.D.	A		Standard O.D.	Self-Aligning O.D. FJA	C Length		MAX		
Closed	Open	mm	MIN	MAX	Closed	Open	mm	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
FJ06	N/A	6	6.010	6.028	FJC06	FJCN06	6.06	6.078	11.989	12	11.943	11.968	18.619	19	0.0254	0.004
FJH08	FJHN08	8	8.013	8.035	FJCH08	FJCHN08	8.063	8.085	14.989	15	14.943	14.968	16.619	17	0.0254	0.005
FJ08	FJN08	8	8.013	8.035	FJC08	FJCN08	8.063	8.085	14.989	15	14.943	14.968	23.619	24	0.0254	0.008
FJ10	FJN10	10	10.013	10.035	FJC10	FJCN10	10.063	10.086	18.987	19	18.936	18.969	28.619	29	0.0254	0.015
FJ12	FJN12	12	12.016	12.043	FJC12	FJCN12	12.066	12.093	20.987	21	20.942	20.968	29.619	30	0.0254	0.018
FJ13	FJN13	13	13.016	13.043	FJC13	FJCN13	13.066	13.093	22.987	23	22.944	22.969	31.619	32	0.0254	0.024
FJ16	FJN16	16	16.016	16.043	FJC16	FJCN16	16.066	16.093	27.988	28	27.943	27.968	36.619	37	0.0254	0.039
FJ20	FJN20	20	20.020	20.053	FJC20	FJCN20	20.096	20.129	31.984	32	31.941	31.966	41.619	42	0.0254	0.052
FJ25	FJN25	25	25.020	25.053	FJC25	FJCN25	25.096	25.129	39.984	40	39.942	39.967	58.619	59	0.0254	0.119
FJ30	FJN30	30	30.020	30.053	FJC30	FJCN30	30.096	30.129	44.984	45	44.940	44.966	63.619	64	0.0254	0.149
FJ35	FJN35	35	35.020	35.053	FJC35	FJCN35	35.100	35.136	51.981	52	51.940	51.966	69.619	70	0.0254	0.212
FJ38	FJN38	38	38.025	38.064	FJC38	FJCN38	38.127	38.166	56.981	57	56.940	56.966	75.619	76	0.0254	0.284
FJ40	FJN40	40	40.025	40.064	FJC40	FJCN40	40.127	40.166	59.981	60	59.939	59.964	79.619	80	0.0254	0.333
FJ50	FJN50	50	50.025	50.064	FJC50	FJCN50	50.127	50.166	79.981	80	79.939	79.964	99.619	100	0.0254	0.823
FJ60	FJN60	60	60.030	60.076	FJC60	FJCN60	60.182	60.228	89.978	90	89.939	89.964	109.619	110	0.0254	1.024
FJ80	FJN80	80	80.030	80.076	FJC80	FJCN80	80.182	80.228	119.978	120	119.939	119.964	139.619	140	0.0380	2.359
FJ100	FJN100	100	100.030	100.076	FJC100	FJCN100	100.182	100.228	149.975	150	149.936	149.962	174.619	175	0.0510	4.651
FJ120	FJN120	120	120.035	120.089	FJC120	FJCN120	120.190	120.236	179.975	180	179.936	179.962	199.619	200	0.0510	7.706
FJ150	FJN150	150	150.035	150.089	FJC150	FJCN150	150.190	150.236	209.971	210	209.934	209.959	239.619	240	0.0510	11.104

MOUNTING DIMENSIONS

Part No.		Nominal Size	H	HA	HB	Ret. Ring Part No.	J	JA	JB	Metric O'ring Size
Closed	Open	mm	Between RET. Rings	RET. Ring GRV. Width	RET. Ring GRV. Dia.	JIS B 2904	Between O'ring GRVS.	O'ring GRV. Width	O'ring GRV. Dia.	
FJ06	N/A	6	11.3	1.15	11.5	STW - 12	4.293	2.032	9.859	9.7 x 1.3
FJH08	FJHN08	8	9.2	1.15	14.3	STW - 15	2.540	2.362	12.243	12 x 1.7
FJ08	FJN08	8	15.2	1.15	14.3	STW - 15	7.493	2.362	12.243	12 x 1.7
FJ10	FJN10	10	19.3	1.35	18.0	STW - 19	9.500	2.362	15.700	15.5 x 2
FJ12	FJN12	12	20.3	1.35	20.0	STW - 20	10.490	2.362	18.546	18 x 1.5
FJ13	FJN13	13	20.3	1.35	22.0	STW - 23	11.481	2.362	20.544	20 x 1.5
FJ16	FJN16	16	23.2	1.65	26.6	STW - 28	11.100	3.556	23.978	23.5 x 2.5
FJ20	FJN20	20	27.2	1.65	30.3	STW - 32	15.977	3.556	27.864	27.5 x 2.5
FJ25	FJN25	25	37.2	1.85	38.0	STW - 40	19.990	3.556	35.865	35.5 x 2.5
FJ30	FJN30	30	40.7	1.85	42.5	STW - 45	22.479	3.556	40.843	40 x 2.5
FJ35	FJN35	35	44.8	2.20	49.0	STW - 52	25.984	4.115	46.200	46 x 3.5
FJ38	FJN38	38	54.3	2.20	54.5	STW - 58	28.499	4.115	51.200	51 x 3.5
FJ40	FJN40	40	56.1	2.20	57.0	STW - 60	29.997	4.115	54.225	53 x 3.5
FJ50	FJN50	50	68.6	2.70	76.5	STW - 80	39.980	4.750	74.193	73 x 3.5
FJ60	FJN60	60	78.7	3.15	86.5	STW - 90	44.983	7.036	81.738	81 x 5
FJ80	FJN80	80	97.2	4.15	116.0	STW - 120	59.995	7.137	111.727	111 x 5
FJ100	FJN100	100	117.2	4.15	145.0	STW - 150	74.981	7.137	141.199	140 x 5.3
FJ120	FJN120	120	150.3	4.15	175.0	STW - 180	89.992	7.137	171.740	170 x 5
FJ150	FJN150	150	160.3	5.15	204.0	STW - 210	104.978	7.137	201.193	200 x 5.3

Simplicity® Linear Plain Bearings

Linear Plain Bearing FJ & FJN

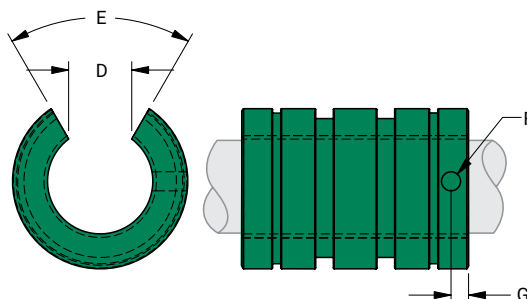

OPEN DIMENSIONAL INFORMATION

Part No.		Nominal Size	D Slot Width MIN.	E Slot Angle	F Ret. Hole Dia.	G Ret. Hole Loc.	Bearing Weight
Precision	Compensated	mm					Kg.
FJHN08	FJHCN08	8	5.1	60	2.200	8.460	0.004
FJN08	FJCN08	8	5.1	60	2.200	11.940	0.006
FJN10	FJCN10	10	7.0	80	3.454	1.941	0.012
FJN12	FJCN12	12	8.0	80	3.454	1.941	0.014
FJN13	FJCN13	13	9.0	80	3.454	2.441	0.018
FJN16	FJCN16	16	11.0	80	3.454	3.019	0.030
FJN20	FJCN20	20	11.0	60	3.454	3.175	0.044
FJN25	FJCN25	25	12.0	50	3.454	3.175	0.102
FJN30	FJCN30	30	15.0	50	5.105	4.763	0.128
FJN35	FJCN35	35	17.0	50	5.105	4.763	0.182
FJN38	FJCN38	38	18.0	50	5.105	4.763	0.245
FJN40	FJCN40	40	20.0	50	5.105	4.763	0.286
FJN50	FJCN50	50	25.0	50	6.731	7.938	0.709
FJN60	FJCN60	60	30.0	50	6.731	7.938	0.882
FJN80	FJCN80	80	40.0	50	6.731	13.181	2.031
FJN100	FJCN100	100	50.0	50	6.731	14.500	4.005
FJN120	FJCN120	120	85.0	80	6.731	16.103	5.994
FJN150	FJCN150	150	105.0	80	6.731	17.350	8.637

LOAD & SPEED DATA

Part No.	Effective Surface Area CM ²	MAX Static Load Kg Frelon®		Effective Surface Area CM ²	MAX Static Load N Frelon	
		GOLD	J & W		GOLD	J & W
FJ06	1.1	528	264	1.14	2,348	1,174
FJH08	1.4	630	315	1.40	2,805	1,402
FJ08	1.9	890	445	1.90	3,962	1,981
FJ10	2.9	1,344	672	2.90	5,982	2,991
FJ12	3.6	1,666	833	3.60	7,413	3,707
FJ13	4.0	1,926	963	4.00	8,570	4,285
FJ16	5.9	2,741	1,371	5.90	12,199	6,099
FJ20	8.4	3,887	1,944	8.40	17,298	8,649
FJ25	15.0	6,827	3,413	15.00	30,379	15,189
FJ30	19.0	8,885	4,442	19.00	39,538	19,769
FJ35	25.0	11,340	5,670	25.00	50,462	25,231
FJ38	29.0	13,363	6,681	29.00	59,464	29,732
FJ40	32.0	14,808	7,404	32.00	65,896	32,948
FJ50	50.0	23,138	11,569	50.00	102,963	51,482
FJ60	66.0	30,542	15,271	66.00	135,911	67,956
FJ80	112.0	51,829	25,914	112.00	230,637	115,319
FJ100	175.0	80,982	40,491	175.00	360,371	180,185
FJ120	240.0	111,061	55,531	240.00	494,222	247,111
FJ150	360.0	166,592	83,296	360.00	741,334	370,667

Note: MAX PV (m/min. * kg/sq. cm)

FrelonGOLD® = 430 PV

Frelon J = 215 PV

MAX Speed Running Dry (m/min.)

FrelonGOLD = 91.4

Frelon J = 42.6

MAX Speed Running

with Lubrication (m/min.)

FrelonGOLD = 251.5

Frelon J = 122

MAX PV (m/s. * N/mm²)

FrelonGOLD = 0.70 PV

Frelon J = 0.35 PV

MAX Speed Running Dry (m/s)

FrelonGOLD = 1.52

Frelon J = 0.71

MAX Speed Running

with Lubrication (m/s)

FrelonGOLD = 4.19

Frelon J = 2.03



Plain Bearing Accessories: Retaining Rings, Seals, O-Rings
page 31




Only certified Simplicity 60 Plus Shafting provides
maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Simplicity® Flange Bearings

Flange Bearings SFPJ

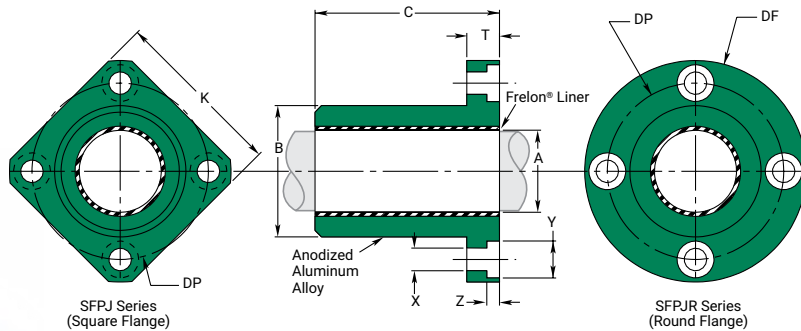

DIMENSIONAL INFORMATION

Precision I.D. Series Similar to Preloaded Ball Bearing					Compensated I.D. Series Similar to Standard Ball Bearing				B Body O.D. H7		C Length H13		Effective Surface Area CM ²	MAX Static Load N	
Part No.		Nominal Size mm	A Bearing I.D. F8		Part No.		A Bearing I.D.		MIN	MAX	MIN	MAX		Frelon®	
Square	Round		MIN	MAX	Square	Round	MIN	MAX						GOLD	J & W
SFPJ06	SFPJR06	6	6.010	6.028	SFPJ06C	SFPJR06C	6.060	6.078	11.982	12	18.8	19	1.194	2,462	1,236
SFPJ08	SFPJR08	8	8.013	8.035	SFPJ08C	SFPJR08C	8.063	8.085	14.982	15	23.8	24	2.011	4,140	2,080
SFPJ10	SFPJR10	10	10.013	10.035	SFPJ10C	SFPJR10C	10.063	10.085	18.979	19	28.8	29	3.037	6,259	3,139
SFPJ12	SFPJR12	12	12.016	12.043	SFPJ12C	SFPJR12C	12.066	12.093	20.979	21	29.8	30	3.770	7,770	3,904
SFPJ13	SFPJR13	13	13.016	13.043	SFPJ13C	SFPJR13C	13.066	13.093	22.979	23	31.8	32	4.356	8,976	4,503
SFPJ16	SFPJR16	16	16.016	16.043	SFPJ16C	SFPJR16C	16.066	16.093	27.979	28	36.8	37	6.199	12,773	6,416
SFPJ20	SFPJR20	20	20.020	20.053	SFPJ20C	SFPJR20C	20.096	20.129	31.975	32	41.8	42	8.796	18,119	9,104
SFPJ25	SFPJR25	25	25.020	25.053	SFPJ25C	SFPJR25C	25.096	25.129	39.975	40	58.7	59	15.446	31,824	15,980
SFPJ30	SFPJR30	30	30.020	30.053	SFPJ30C	SFPJR30C	30.096	30.129	44.975	45	63.7	64	20.106	41,418	20,797
SFPJ35	SFPJR35	35	35.020	35.053	SFPJ35C	SFPJR35C	35.096	35.129	51.970	52	69.7	70	25.656	52,856	26,536
SFPJ40	SFPJR40	40	40.025	40.064	SFPJ40C	SFPJR40C	40.127	40.166	59.970	60	79.7	80	33.510	69,033	34,669
SFPJ50	SFPJR50	50	50.025	50.064	SFPJ50C	SFPJR50C	50.127	50.166	79.965	80	99.7	100	52.360	107,871	54,161
SFPJ60	SFPJR60	60	60.030	60.076	SFPJ60C	SFPJR60C	60.182	60.228	89.965	90	109.6	110	69.115	142,382	71,495
SFPJ80	SFPJR80	80	80.030	80.076	SFPJ80C	SFPJR80C	80.182	80.228	119.965	120	139.6	140	117.286	241,620	121,330


Notes: (1) Formula used for effective surface area is $(\pi * ID * L)/3$.
 (2) MAX static load is effective surface area times MAX load for FrelonGOLD®.
 (3) - 210 kgf/cm² is the rating for FrelonGOLD®; 105.45 kgf/cm² is the rating for Frelon J.

MOUNTING DIMENSIONS

Part No.		K	DF	T	DP	X	Y	Z	Clamping Bolt	Concentricity	Squareness	SFPJ Weight		SFPJR Weight
Square	Round	Square MAX	O.D. MAX	Length MAX	Bolt Circle	Hole	C'Bore Dia.	C'Bore Depth				Kg	Kg	Kg
SFPJ06	SFPJR06	22	28	8	20	3.5	6	3.1	M 3	0.012	0.012	0.011	0.014	
SFPJ08	SFPJR08	25	32	8	24	3.5	6	3.1	M 3	0.012	0.012	0.017	0.021	
SFPJ10	SFPJR10	30	40	9	29	4.5	7.5	4.1	M 4	0.012	0.012	0.029	0.038	
SFPJ12	SFPJR12	32	42	9	32	4.5	7.5	4.1	M 4	0.012	0.012	0.033	0.042	
SFPJ13	SFPJR13	34	43	9	33	4.5	7.5	4.1	M 4	0.012	0.012	0.041	0.048	
SFPJ16	SFPJR16	37	48	9	38	4.5	7.5	4.1	M 4	0.012	0.012	0.058	0.069	
SFPJ20	SFPJR20	42	54	11	43	5.5	9	5.1	M 5	0.015	0.015	0.081	0.097	
SFPJ25	SFPJR25	50	62	11	51	5.5	9	5.1	M 5	0.015	0.015	0.158	0.174	
SFPJ30	SFPJR30	58	74	14	60	6.6	11	6.1	M 6	0.015	0.015	0.216	0.252	
SFPJ35	SFPJR35	64	82	14	67	6.6	11	6.1	M 6	0.017	0.017	0.292	0.338	
SFPJ40	SFPJR40	75	96	18	78	9.0	14	8.1	M 8	0.017	0.017	0.467	0.547	
SFPJ50	SFPJR50	92	116	18	98	9.0	14	8.1	M 8	0.017	0.017	0.999	1.104	
SFPJ60	SFPJR60	106	134	24	112	11.0	17	11.1	M 10	0.020	0.020	1.359	1.550	
SFPJ80	SFPJR80	136	164	24	142	11.0	17	11.1	M 10	0.020	0.020	2.873	3.048	

Simplicity® Flange Bearings

Flange Bearings DFPJ

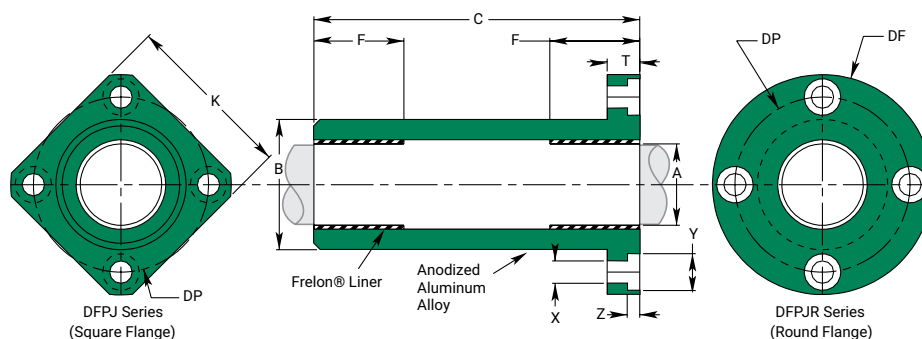

DIMENSIONAL INFORMATION

Precision I.D. Series Similar to Preloaded Ball Bearing					Compensated I.D. Series Similar to Standard Ball Bearing				B Body O.D. H7		C Length		F Length Each End	Effective Surface Area CM ²	MAX Static Load N	
Part No.		Nominal Size mm	A Bearing I.D. F8		Part No.		A Bearing I.D.		MIN	MAX	MIN	MAX			Frelon®	
Square	Round		MIN	MAX	Square	Round	MIN	MAX							GOLD	J & W
DFPJ06	DFPJR06	6	6.010	6.028	DFPJ06C	DFPJR06C	6.060	6.078	11.982	12	34.7	35	12	1.508	3,110	1,560
DFPJ08	DFPJR08	8	8.013	8.035	DFPJ08C	DFPJR08C	8.063	8.085	14.982	15	44.7	45	12	2.011	4,140	2,080
DFPJ10	DFPJR10	10	10.013	10.035	DFPJ10C	DFPJR10C	10.063	10.085	18.979	19	54.7	55	14	2.932	6,043	3,031
DFPJ12	DFPJR12	12	12.016	12.043	DFPJ12C	DFPJR12C	12.066	12.093	20.979	21	56.7	57	15	3.770	7,770	3,904
DFPJ13	DFPJR13	13	13.016	13.043	DFPJ13C	DFPJR13C	13.066	13.093	22.979	23	60.7	61	16	4.356	8,976	4,503
DFPJ16	DFPJR16	16	16.016	16.043	DFPJ16C	DFPJR16C	16.066	16.093	27.979	28	69.7	70	20	6.702	13,803	6,936
DFPJ20	DFPJR20	20	20.020	20.053	DFPJ20C	DFPJR20C	20.096	20.129	31.975	32	79.7	80	22	9.215	18,982	9,535
DFPJ25	DFPJR25	25	25.020	25.053	DFPJ25C	DFPJR25C	25.096	25.129	39.975	40	111.6	112	33	17.279	35,600	17,874
DFPJ30	DFPJR30	30	30.020	30.053	DFPJ30C	DFPJR30C	30.096	30.129	44.975	45	122.6	123	35	21.991	45,303	22,749
DFPJ35	DFPJR35	35	35.020	35.053	DFPJ35C	DFPJR35C	35.096	35.129	51.970	52	134.6	135	40	29.322	60,410	30,333
DFPJ40	DFPJR40	40	40.025	40.064	DFPJ40C	DFPJR40C	40.127	40.166	59.970	60	150.6	151	44	36.861	75,939	38,131
DFPJ50	DFPJR50	50	50.025	50.064	DFPJ50C	DFPJR50C	50.127	50.166	79.965	80	191.6	192	70	73.304	151,015	75,831
DFPJ60	DFPJR60	60	60.030	60.076	DFPJ60C	DFPJR60C	60.182	60.228	89.965	90	208.6	209	73	91.735	188,980	94,892


- Notes:** (1) Formula used for effective surface area is $(\pi * ID * L)/3$.
(2) MAX static load is effective surface area times MAX load for FrelonGOLD®.
(3) - 210 kgf/cm² is the rating for FrelonGOLD®; 105.45 kgf/cm² is the rating for Frelon J.
(4) Frelon pads in each end (F dimension).

MOUNTING DIMENSIONS

Part No.		K Square	DF O.D.	T Length	DP Bolt Circle	X Hole	Y C'Bore Dia.	Z C'Bore Depth	Clamping Bolt	Concentricity	Squareness	DFPJ Weight Kg	DFPJR Weight Kg
Square	Round	MAX	MAX	MAX									
DFPJ06	DFPJR06	22	28	8	20	3.5	6	3.1	M 3	0.015	0.015	0.015	0.018
DFPJ08	DFPJR08	25	32	8	24	3.5	6	3.1	M 3	0.015	0.015	0.024	0.028
DFPJ10	DFPJR10	30	40	9	29	4.5	7.5	4.1	M 4	0.015	0.015	0.044	0.053
DFPJ12	DFPJR12	32	42	9	32	4.5	7.5	4.1	M 4	0.015	0.015	0.051	0.060
DFPJ13	DFPJR13	34	43	9	33	4.5	7.5	4.1	M 4	0.015	0.015	0.063	0.071
DFPJ16	DFPJR16	37	48	9	38	4.5	7.5	4.1	M 4	0.015	0.015	0.096	0.107
DFPJ20	DFPJR20	42	54	11	43	5.5	9	5.1	M 5	0.017	0.017	0.133	0.149
DFPJ25	DFPJR25	50	62	11	51	5.5	9	5.1	M 5	0.017	0.017	0.270	0.286
DFPJ30	DFPJR30	58	74	14	60	6.6	11	6.1	M 6	0.017	0.017	0.360	0.397
DFPJ35	DFPJR35	64	82	14	67	6.6	11	6.1	M 6	0.020	0.020	0.501	0.547
DFPJ40	DFPJR40	75	96	18	78	9.0	14	8.1	M 8	0.020	0.020	0.776	0.856
DFPJ50	DFPJR50	92	116	18	98	9.0	14	8.1	M 8	0.020	0.020	1.780	1.885
DFPJ60	DFPJR60	106	134	24	112	11.0	17	11.1	M 10	0.025	0.025	2.329	2.519

Simplicity® Flange Bearings

Flange Bearings CFPJ

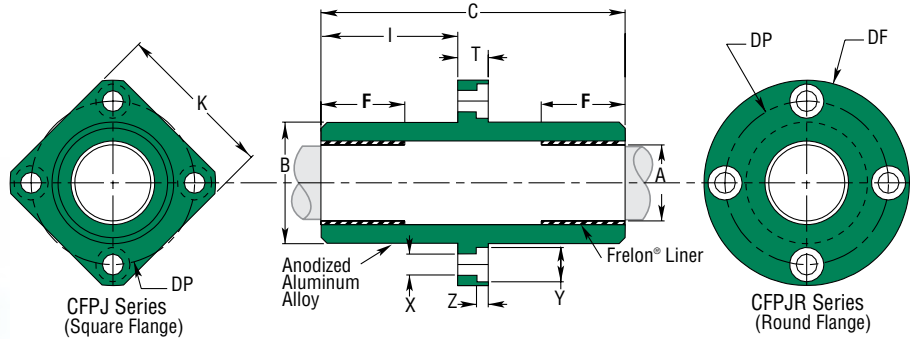

DIMENSIONAL INFORMATION

Precision I.D. Series Similar to Preloaded Ball Bearing					Compensated I.D. Series Similar to Standard Ball Bearing					B Body O.D. H7		C Length		I Length To FLNG.	F Length Each End	Effective Surface Area CM ²	MAX Static Load N	
Part No.		Nominal Size	A Bearing I.D. F8		Part No.		A Bearing I.D.		Frelon®									
Square	Round	mm	MIN	MAX	Square	Round	MIN	MAX	MIN	MAX	MIN	MAX	FLNG.				GOLD	J & W
CFPJ06	CFPJR06	6	6.010	6.028	CFPJ06C	CFPJR06C	6.060	6.078	11.982	12	34.7	35.3	13.5	12	1.508	3,110	1,560	
CFPJ08	CFPJR08	8	8.013	8.035	CFPJ08C	CFPJR08C	8.063	8.085	14.982	15	44.7	45.3	18.5	12	2.011	4,140	2,080	
CFPJ10	CFPJR10	10	10.013	10.035	CFPJ10C	CFPJR10C	10.063	10.085	18.979	19	54.7	55.3	23.0	14	2.932	6,043	3,031	
CFPJ12	CFPJR12	12	12.016	12.043	CFPJ12C	CFPJR12C	12.066	12.093	20.979	21	56.7	57.3	24.0	15	3.770	7,770	3,904	
CFPJ13	CFPJR13	13	13.016	13.043	CFPJ13C	CFPJR13C	13.066	13.093	22.979	23	60.7	61.3	26.0	16	4.356	8,976	4,503	
CFPJ16	CFPJR16	16	16.016	16.043	CFPJ16C	CFPJR16C	16.066	16.093	27.979	28	69.7	70.3	30.5	20	6.702	13,803	6,936	
CFPJ20	CFPJR20	20	20.020	20.053	CFPJ20C	CFPJR20C	20.096	20.129	31.975	32	79.7	80.3	34.5	22	9.215	18,982	9,535	
CFPJ25	CFPJR25	25	25.020	25.053	CFPJ25C	CFPJR25C	25.096	25.129	39.975	40	111.7	112.3	50.5	33	17.279	35,600	17,874	
CFPJ30	CFPJR30	30	30.020	30.053	CFPJ30C	CFPJR30C	30.096	30.129	44.975	45	122.7	123.3	54.5	35	21.991	45,303	22,749	
CFPJ35	CFPJR35	35	35.020	35.053	CFPJ35C	CFPJR35C	35.096	35.129	51.970	52	134.7	135.3	60.5	40	29.322	60,410	30,333	
CFPJ40	CFPJR40	40	40.025	40.064	CFPJ40C	CFPJR40C	40.127	40.166	59.970	60	150.7	151.3	66.5	44	36.861	75,939	38,131	
CFPJ50	CFPJR50	50	50.025	50.064	CFPJ50C	CFPJR50C	50.127	50.166	79.965	80	191.7	192.3	87.0	70	73.304	151,015	75,831	
CFPJ60	CFPJR60	60	60.030	60.076	CFPJ60C	CFPJR60C	60.182	60.228	89.965	90	208.7	209.3	92.5	73	91.735	188,980	94,892	

- Notes:** (1) Formula used for effective surface area is $(\pi * ID * L)/3$.
 (2) MAX static load is effective surface area times MAX load for FrelonGOLD®.
 (3) - 210 kgf/cm² is the rating for FrelonGOLD®; 105.45 kgf/cm² is the rating for Frelon J.
 (4) Frelon pads in each end (F dimension).



Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.


Inch Series—page 52 Metric Series—page 94

MOUNTING DIMENSIONS

Part No.		K Square	DF O.D.	T Length	Dp Bolt Circle	X Hole	Y C'Bore Dia.	Z C'Bore Depth	Clamping Bolt	Concentricity	Squareness	CFPJ Weight Kg.	CFPJR Weight Kg.
Square	Round	MAX	MAX	MAX									
CFPJ06	CFPJR06	22	28	8	20	3.5	6	3.1	M 3	0.015	0.015	0.015	0.018
CFPJ08	CFPJR08	25	32	8	24	3.5	6	3.1	M 3	0.015	0.015	0.024	0.028
CFPJ10	CFPJR10	30	40	9	29	4.5	7.5	4.1	M 4	0.015	0.015	0.044	0.053
CFPJ12	CFPJR12	32	42	9	32	4.5	7.5	4.1	M 4	0.015	0.015	0.051	0.060
CFPJ13	CFPJR13	34	43	9	33	4.5	7.5	4.1	M 4	0.015	0.015	0.063	0.071
CFPJ16	CFPJR16	37	48	9	38	4.5	7.5	4.1	M 4	0.015	0.015	0.096	0.107
CFPJ20	CFPJR20	42	54	11	43	5.5	9	5.1	M 5	0.017	0.017	0.133	0.149
CFPJ25	CFPJR25	50	62	11	51	5.5	9	5.1	M 5	0.017	0.017	0.270	0.286
CFPJ30	CFPJR30	58	74	14	60	6.6	11	6.1	M 6	0.017	0.017	0.360	0.397
CFPJ35	CFPJR35	64	82	14	67	6.6	11	6.1	M 6	0.020	0.020	0.501	0.547
CFPJ40	CFPJR40	75	96	18	78	9.0	14	8.1	M 8	0.020	0.020	0.776	0.856
CFPJ50	CFPJR50	92	116	18	98	9.0	14	8.1	M 8	0.020	0.020	1.780	1.885
CFPJ60	CFPJR60	106	134	24	112	11.0	17	11.1	M 10	0.025	0.025	2.329	2.519

Linear Ball Bearings Precision

Ball Bearings JP

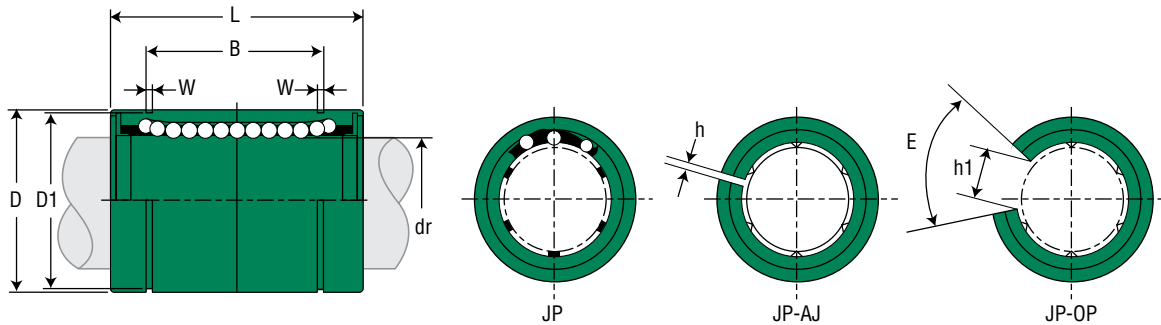

JP – Standard Closed

JPxx-AJ – Adjustable

JPxx-OP – Standard Open



DIMENSIONAL INFORMATION


(Standard Steel Finish)

Part No.			Nominal Shaft Diameter			Ball Circuit	Weight G	Major Dimensions & Tolerances					
Standard Closed	Adjustable	Standard Open	Size mm	dr mm	Tolerance mm			D mm	Tolerance mm	L mm	Tolerance mm	B mm	Tolerance mm
JP08G	-	-	8	8	0/-0.009	4	16	15	0/-0.011	24	0/-0.2	17.5	0/-0.2
JP10G	-	-	10	10	0/-0.009	4	30	19	0/-0.013	29	0/-0.2	22	0/-0.2
JP12G	JP12G-AJ	JP12G-OP	12	12	0/-0.009	4	31.5	21	0/-0.013	30	0/-0.2	23	0/-0.2
JP13G	JP13G-AJ	JP13G-OP	13	13	0/-0.009	4	43	23	0/-0.013	32	0/-0.2	23	0/-0.2
JP16G	JP16G-AJ	JP16G-OP	16	16	0/-0.009	5	69	28	0/-0.013	37	0/-0.2	26.5	0/-0.2
JP20G	JP20G-AJ	JP20G-OP	20	20	0/-0.010	5	87	32	0/-0.016	42	0/-0.2	30.5	0/-0.2
JP25G	JP25G-AJ	JP25G-OP	25	25	0/-0.010	6	220	40	0/-0.016	59	0/-0.3	41	0/-0.3
JP30G	JP30G-AJ	JP30G-OP	30	30	0/-0.010	6	250	45	0/-0.016	64	0/-0.3	44.5	0/-0.3
JP35G	JP35G-AJ	JP35G-OP	35	35	0/-0.012	6	390	52	0/-0.019	70	0/-0.3	49.5	0/-0.3
JP40G	JP40G-AJ	JP40G-OP	40	40	+0/-0.012	6	585	60	0/-0.019	80	0/-0.3	60.5	0/-0.3
JP50G	JP50G-AJ	JP50G-OP	50	50	+0/-0.015	6	1580	80	0/-0.022	100	0/-0.3	74	0/-0.3

Part No.			Nominal Shaft Diameter			Major Dimensions & Tolerances							Load Ratings	
Standard Closed	Adjustable	Standard Open	Size mm	dr mm	Tolerance mm	W mm	D1 mm	H mm	H1 mm	E Slot Angle	MAX Eccentricity μm	MAX Radial Clearance μm	Dynamic C N	Static Co N
JP08G	-	-	8	8	0/-0.009	1.1	14.3	1	-	-	12	-5	260	400
JP10G	-	-	10	10	0/-0.009	1.3	18	1	-	-	12	-5	370	540
JP12G	JP12G-AJ	JP12G-OP	12	12	0/-0.009	1.3	20	1.5	8	80°	12	-5	410	590
JP13G	JP13G-AJ	JP13G-OP	13	13	0/-0.009	1.3	22	1.5	9	80°	12	-5	500	770
JP16G	JP16G-AJ	JP16G-OP	16	16	0/-0.009	1.6	27	1.5	11	80°	12	-7	770	1,170
JP20G	JP20G-AJ	JP20G-OP	20	20	0/-0.010	1.6	30.5	1.5	11	60°	15	-7	860	1,370
JP25G	JP25G-AJ	JP25G-OP	25	25	0/-0.010	1.85	38	2	12	50°	15	-9	980	1,560
JP30G	JP30G-AJ	JP30G-OP	30	30	0/-0.010	1.85	43	2.5	15	50°	15	-9	1,560	2,740
JP35G	JP35G-AJ	JP35G-OP	35	35	0/-0.012	2.1	49	2.5	17	50°	20	-9	1,660	3,130
JP40G	JP40G-AJ	JP40G-OP	40	40	+0/-0.012	2.1	57	3	20	50°	20	-13	2,150	4,010
JP50G	JP50G-AJ	JP50G-OP	50	50	+0/-0.015	2.6	76.5	3	25	50°	20	-13	3,820	7,930

Linear Ball Bearings Double Wide

Double Wide Ball Bearings JP-W

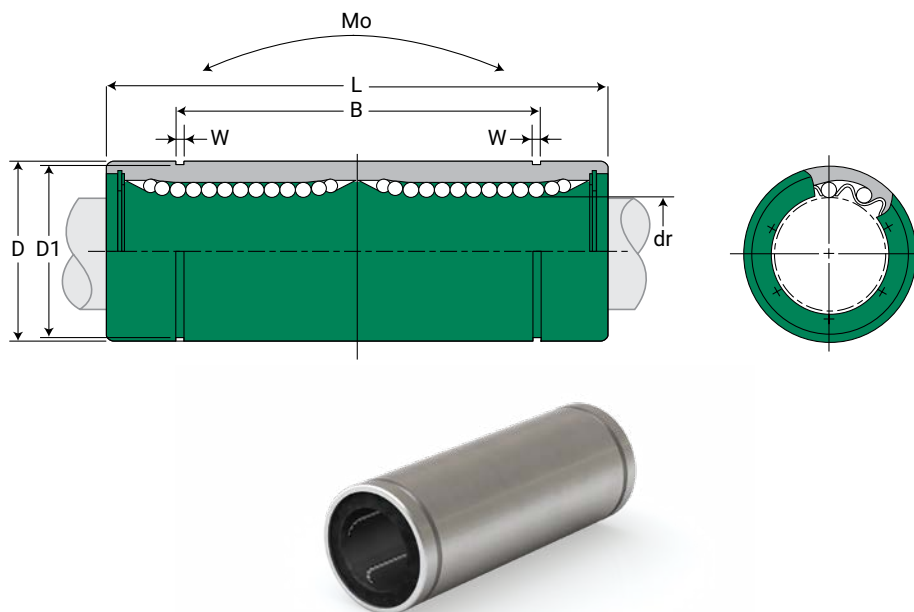

DIMENSIONAL INFORMATION

(Standard Steel Finish)

Part No.	Nominal Shaft Diameter			Major Dimensions & Tolerances							
Standard Polymer Cage	Size mm	dr mm	Tolerance mm	Ball Circuit	Weight G	D mm	Tolerance mm	L mm	Tolerance mm	B mm	Tolerance mm
JP08GW	8	8	0/-0.010	4	31	15	0/-0.013	45	0/-0.3	35	0/-0.3
JP12GW	12	12	0/-0.010	4	80	21	0/-0.016	57	0/-0.3	46	0/-0.3
JP16GW	16	16	0/-0.010	5	145	28	0/-0.016	70	0/-0.3	53	0/-0.3
JP20GW	20	20	0/-0.012	5	180	32	0/-0.019	80	0/-0.3	61	0/-0.3
JP25GW	25	25	0/-0.012	6	440	40	0/-0.019	112	0/-0.4	82	0/-0.4
JP30GW	30	30	0/-0.012	6	580	45	0/-0.019	123	0/-0.4	89	0/-0.4
JP40GW	40	40	0/-0.015	6	1170	60	0/-0.022	151	0/-0.4	121	0/-0.4
JP50GW	50	50	0/-0.015	6	3100	80	0/-0.022	192	0/-0.4	148	0/-0.4

Part No.	Nominal Shaft Diameter			Major Dimensions & Tolerances			Load Ratings	
Standard Polymer Cage	Size mm	dr mm	Tolerance mm	W mm	D1 mm	MAX Eccentricity μ m	Dynamic C N	Static Co N
JP08GW	8	8	0/-0.010	1.1	14.3	15	431	784
JP12GW	12	12	0/-0.010	1.3	20	15	657	1,200
JP16GW	16	16	0/-0.010	1.6	27	15	1,230	2,350
JP20GW	20	20	0/-0.012	1.6	30.5	20	1,400	2,750
JP25GW	25	25	0/-0.012	1.85	38	20	1,560	3,140
JP30GW	30	30	0/-0.012	1.85	43	20	2,490	5,490
JP40GW	40	40	0/-0.015	2.1	57	25	3,430	8,040
JP50GW	50	50	0/-0.015	2.6	76.5	25	6,080	15,900




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Linear Ball Bearings Square Flange Mount

Ball Bearings – Square Flange Mount JPK

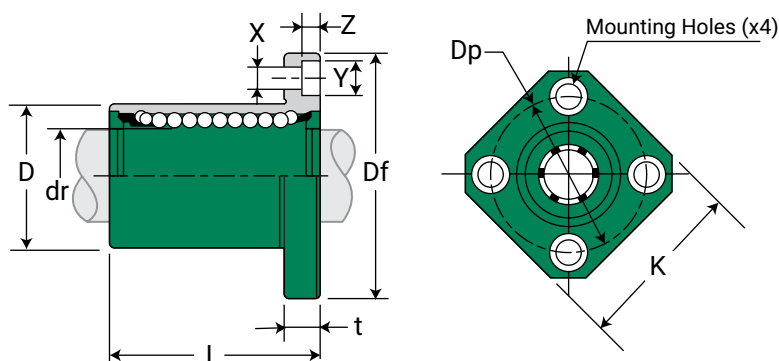

DIMENSIONAL INFORMATION

(Standard Steel Finish)

Part No.	Nominal Shaft Diameter			Ball Circuit	Weight G	Major Dimensions & Tolerances			
	Size mm	dr mm	Tolerance mm			D mm	Tolerance mm	L mm	Tolerance mm
JPK08G	8	8	0/-0.009	4	37	15	0/-0.013	24	±0.3
JPK12G	12	12	0/-0.009	4	76	21	0/-0.016	30	±0.3
JPK16G	16	16	0/-0.009	5	120	28	0/-0.016	37	±0.3
JPK20G	20	20	0/-0.010	5	180	32	0/-0.019	42	±0.3
JPK25G	25	25	0/-0.010	6	340	40	0/-0.019	59	±0.3
JPK30G	30	30	0/-0.010	6	470	45	0/-0.019	64	±0.3
JPK40G	40	40	0/-0.012	6	1,060	60	0/-0.022	80	±0.3
JPK50G	50	50	0/-0.012	6	2,200	80	0/-0.022	100	±0.3

Part No.	Nominal Shaft Diameter			Major Dimensions & Tolerances – Flange									Load Ratings	
	Size mm	dr mm	Tolerance mm	Df mm	K mm	T mm	Dp mm	X mm	Y mm	Z mm	Eccentricity μm	Squareness μm	Dynamic C N	Static Co N
JPK08G	8	8	0/-0.009	32	25	5	24	3.5	6.5	3.1	12	12	274	392
JPK12G	12	12	0/-0.009	42	32	6	32	4.5	8	4.1	12	12	510	784
JPK16G	16	16	0/-0.009	48	37	6	38	4.5	8	4.1	12	12	774	1,180
JPK20G	20	20	0/-0.010	54	42	8	43	5.5	9.3	5.1	15	15	882	1,370
JPK25G	25	25	0/-0.010	62	50	8	51	5.5	9.3	5.1	15	15	980	1,570
JPK30G	30	30	0/-0.010	74	58	10	60	6.6	11	6.1	15	15	1,570	2,740
JPK40G	40	40	0/-0.012	96	75	13	78	9	14	8.1	20	20	2,160	4,020
JPK50G	50	50	0/-0.012	116	92	13	98	9	14	8.1	20	20	3,820	7,940




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series–page 52 Metric Series–page 94

Linear Ball Bearings Round Flange Mount

Ball Bearings – Round Flange Mount JPF

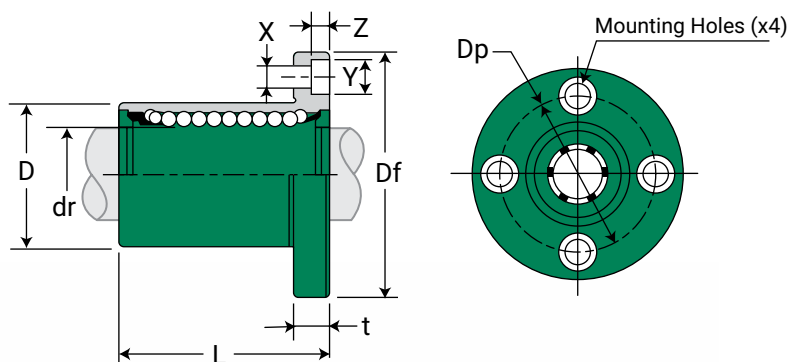

DIMENSIONAL INFORMATION

(Standard Steel Finish)

Part No.	Nominal Shaft Diameter			Ball Circuit	Weight G	Major Dimensions & Tolerances			
	Size mm	dr mm	Tolerance mm			D mm	Tolerance mm	L mm	Tolerance mm
JPF08G	8	8	0/-0.009	4	37	15	0/-0.013	24	±0.3
JPF12G	12	12	0/-0.009	4	76	21	0/-0.016	30	±0.3
JPF16G	16	16	0/-0.009	5	120	28	0/-0.016	37	±0.3
JPF20G	20	20	0/-0.010	5	180	32	0/-0.019	42	±0.3
JPF25G	25	25	0/-0.010	6	340	40	0/-0.019	59	±0.3
JPF30G	30	30	0/-0.010	6	470	45	0/-0.019	64	±0.3
JPF40G	40	40	0/-0.012	6	1,060	60	0/-0.022	80	±0.3
JPF50G	50	50	0/-0.012	6	2,200	80	0/-0.022	100	±0.3

Part No.	Nominal Shaft Diameter			Major Dimensions & Tolerances – Flange								Load Ratings	
	Size mm	dr mm	Tolerance mm	Df mm	T mm	Dp mm	X mm	Y mm	Z mm	Eccentricity μm	Squareness μm	Dynamic C N	Static Co N
JPF08G	8	8	0/-0.009	32	5	24	3.5	6.5	3.1	12	12	274	392
JPF12G	12	12	0/-0.009	42	6	32	4.5	8	4.1	12	12	510	784
JPF16G	16	16	0/-0.009	48	6	38	4.5	8	4.1	12	12	774	1,180
JPF20G	20	20	0/-0.010	54	8	43	5.5	9.3	5.1	15	15	882	1,370
JPF25G	25	25	0/-0.010	62	8	51	5.5	9.3	5.1	15	15	980	1,570
JPF30G	30	30	0/-0.010	74	10	60	6.6	11	6.1	15	15	1,570	2,740
JPF40G	40	40	0/-0.012	96	13	78	9	14	8.1	20	20	2,160	4,020
JPF50G	50	50	0/-0.012	116	13	98	9	14	8.1	20	20	3,820	7,940




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Linear Ball Bearings Double Wide

Double Wide Ball Bearings – Square Flange Mount JPK-W

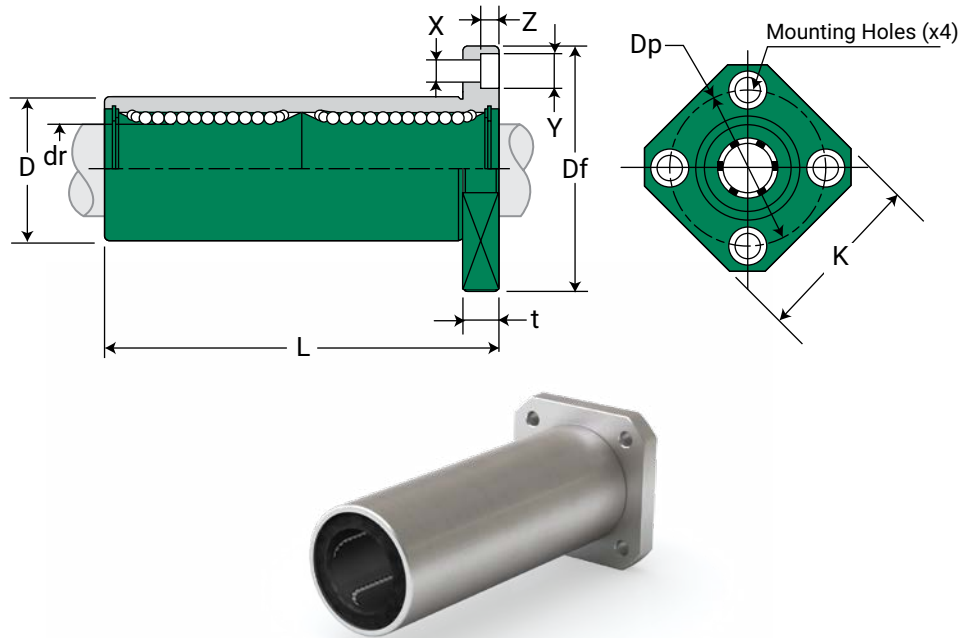

DIMENSIONAL INFORMATION

(Standard Steel Finish)

Part No.	Nominal Shaft Diameter			Ball Circuit	Weight G	Major Dimensions & Tolerances			
	Size mm	dr mm	Tolerance mm			D mm	Tolerance mm	L mm	Tolerance mm
JPK08GW	8	8	0/-0.010	4	43	15	0/-0.013	45	±0.3
JPK12GW	12	12	0/-0.010	4	90	21	0/-0.016	57	±0.3
JPK16GW	16	16	0/-0.010	5	165	28	0/-0.016	70	±0.3
JPK20GW	20	20	0/-0.010	5	225	32	0/-0.019	80	±0.3
JPK25GW	25	25	0/-0.012	6	500	40	0/-0.019	112	±0.3
JPK30GW	30	30	0/-0.012	6	590	45	0/-0.019	123	±0.3
JPK40GW	40	40	0/-0.015	6	1,380	60	0/-0.022	154	±0.3
JPK50GW	50	50	0/-0.015	6	3,400	80	0/-0.025	192	±0.3

Part No.	Nominal Shaft Diameter			Major Dimensions & Tolerances – Flange									Load Ratings	
	Size mm	dr mm	Tolerance mm	Df mm	K mm	T mm	Dp mm	X mm	Y mm	Z mm	Eccentricity μm	Squareness μm	Dynamic C N	Static Co N
JPK08GW	8	8	0/-0.010	32	25	5	24	3.5	6.5	3.1	15	15	431	784
JPK12GW	12	12	0/-0.010	42	32	6	32	4.5	8	4.1	15	15	813	1,570
JPK16GW	16	16	0/-0.010	48	37	6	38	4.5	8	4.1	15	15	1,230	2,350
JPK20GW	20	20	0/-0.010	54	42	8	43	5.5	9.3	5.1	20	20	1,400	2,740
JPK25GW	25	25	0/-0.012	62	50	8	51	5.5	9.3	5.1	20	20	1,560	3,140
JPK30GW	30	30	0/-0.012	74	58	10	60	6.6	11	6.1	20	20	2,490	5,490
JPK40GW	40	40	0/-0.015	96	75	13	78	9	14	8.1	25	25	3,430	8,040
JPK50GW	50	50	0/-0.015	116	92	13	98	9	14	8.1	25	25	6,080	15,900




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series–page 52 Metric Series–page 94

Linear Ball Bearings Double Wide

Double Wide Ball Bearings – Round Flange Mount JPF-W

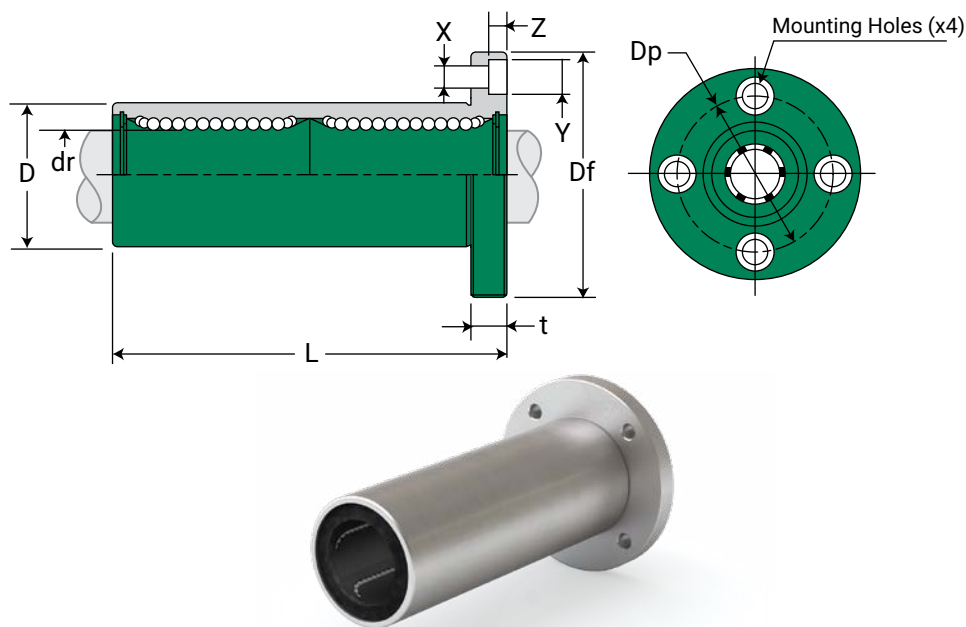

DIMENSIONAL INFORMATION

(Standard Steel Finish)

Part No.	Nominal Shaft Diameter			Ball Circuit	Weight G	Major Dimensions & Tolerances			
	Size mm	dr mm	Tolerance mm			D mm	Tolerance mm	L mm	Tolerance mm
JPF08GW	8	8	0/-0.010	4	51	15	0/-0.013	45	±0.3
JPF12GW	12	12	0/-0.010	4	110	21	0/-0.016	57	±0.3
JPF16GW	16	16	0/-0.010	5	190	28	0/-0.016	70	±0.3
JPF20GW	20	20	0/-0.010	5	260	32	0/-0.019	80	±0.3
JPF25GW	25	25	0/-0.012	6	540	40	0/-0.019	112	±0.3
JPF30GW	30	30	0/-0.012	6	680	45	0/-0.019	123	±0.3
JPF40GW	40	40	0/-0.015	6	1,570	60	0/-0.022	154	±0.3
JPF50GW	50	50	0/-0.020	6	3,600	80	0/-0.025	192	±0.3

Part No.	Nominal Shaft Diameter			Major Dimensions & Tolerances – Flange								Load Ratings	
	Size mm	dr mm	Tolerance mm	Df mm	T mm	Dp mm	X mm	Y mm	Z mm	Eccentricity μm	Squareness μm	Dynamic C N	Static Co N
JPF08GW	8	8	0/-0.010	32	5	24	3.5	6.5	3.1	15	15	431	784
JPF12GW	12	12	0/-0.010	42	6	32	4.5	8	4.1	15	15	813	1,570
JPF16GW	16	16	0/-0.010	48	6	38	4.5	8	4.1	15	15	1,230	2,350
JPF20GW	20	20	0/-0.010	54	8	43	5.5	9.3	5.1	20	20	1,400	2,740
JPF25GW	25	25	0/-0.012	62	8	51	5.5	9.3	5.1	20	20	1,560	3,140
JPF30GW	30	30	0/-0.012	74	10	60	6.6	11	6.1	20	20	2,490	5,490
JPF40GW	40	40	0/-0.015	96	13	78	9	14	8.1	25	25	3,430	8,040
JPF50GW	50	50	0/-0.020	116	13	98	9	14	8.1	25	25	6,080	15,900




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series–page 52 Metric Series–page 94

Linear Ball Bearings Square Flange Center Mount

Ball Bearings – Square Flange Center Mount JPKC

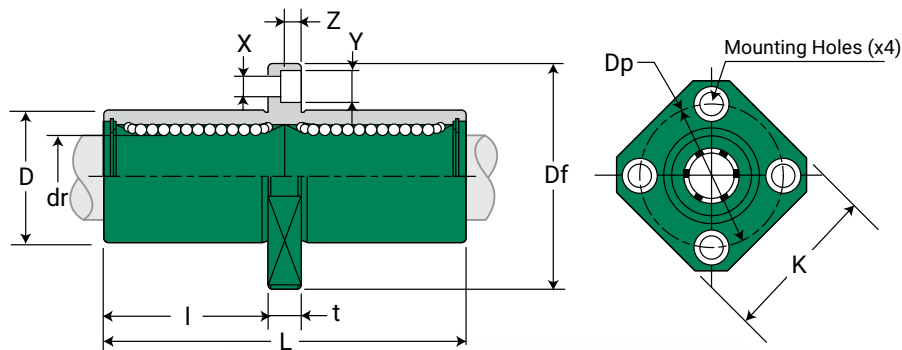

DIMENSIONAL INFORMATION

(Standard Steel Finish)

Part No.	Nominal Shaft Diameter			Ball Circuit	Weight G	Major Dimensions & Tolerances			
	Size mm	dr mm	Tolerance μm			D mm	Tolerance μm	L mm	Tolerance μm
JPKC08G	8	8	0/-10	4	43	15	0/-13	45	± 300
JPKC12G	12	12	0/-10	4	90	21	0/-16	57	± 300
JPKC16G	16	16	0/-10	5	165	28	0/-16	70	± 300
JPKC20G	20	20	0/-12	5	225	32	0/-19	80	± 300
JPKC25G	25	25	0/-12	6	500	40	0/-19	112	± 300
JPKC30G	30	30	0/-12	6	590	45	0/-19	123	± 300
JPKC40G	40	40	0/-15	6	1,380	60	0/-22	154	± 300
JPKC50G	50	50	0/-15	6	3,400	80	0/-22	192	± 300

Part No.	Nominal Shaft Diameter			Major Dimensions & Tolerances – Flange										Load Ratings	
	Size mm	dr mm	Tolerance μm	I mm	Df mm	K mm	T mm	Dp mm	X mm	Y mm	Z mm	Eccentricity μm	Squareness μm	Dynamic C N	Static Co N
JPKC08G	8	8	0/-10	20	32	25	5	24	3.5	6.5	3.1	15	15	431	784
JPKC12G	12	12	0/-10	25.5	42	32	6	32	4.5	8	4.1	15	15	813	1,570
JPKC16G	16	16	0/-10	32	48	37	6	38	4.5	8	4.1	15	15	1,230	2,350
JPKC20G	20	20	0/-12	36	54	42	8	43	5.5	9.3	5.1	20	20	1,400	2,740
JPKC25G	25	25	0/-12	52	62	50	8	51	5.5	9.3	5.1	20	20	1,560	3,140
JPKC30G	30	30	0/-12	56.5	74	58	10	60	6.6	11	6.1	20	20	2,490	5,490
JPKC40G	40	40	0/-15	69	96	75	13	78	9	14	8.1	25	25	3,430	8,040
JPKC50G	50	50	0/-15	89.5	116	92	13	98	9	14	8.1	25	25	6,080	15,900




Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

Linear Ball Bearings Round Flange Center Mount

Ball Bearings – Round Flange Center Mount JPFC

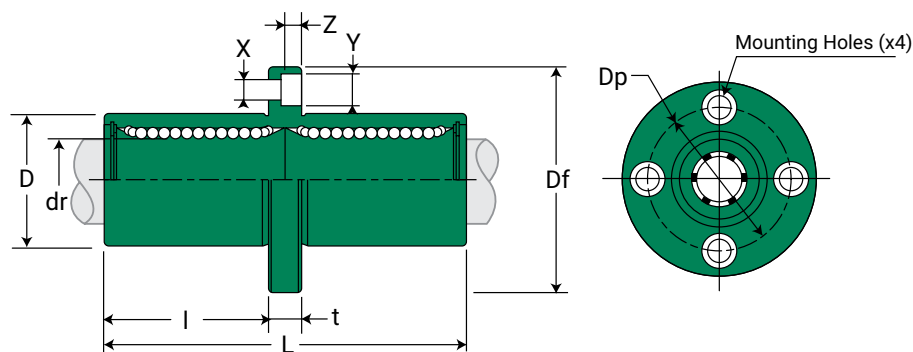

DIMENSIONAL INFORMATION

(Standard Steel Finish)


Part No. Standard Polymer Cage	Nominal Shaft Diameter			Ball Circuit	Weight G	Major Dimensions & Tolerances			
	Size mm	dr mm	Tolerance μm			D mm	Tolerance μm	L mm	Tolerance μm
JPFC08G	8	8	0/-10	4	51	15	0/-13	45	±300
JPFC12G	12	12	0/-10	4	110	21	0/-16	57	±300
JPFC16G	16	16	0/-10	5	190	28	0/-16	70	±300
JPFC20G	20	20	0/-12	5	260	32	0/-19	80	±300
JPFC25G	25	25	0/-12	6	540	40	0/-19	112	±300
JPFC30G	30	30	0/-12	6	680	45	0/-19	123	±300
JPFC40G	40	40	0/-15	6	1,570	60	0/-22	154	±300
JPFC50G	50	50	0/-15	6	3,600	80	0/-22	192	±300

Part No. Standard Polymer Cage	Nominal Shaft Diameter			Major Dimensions & Tolerances – Flange									Load Ratings	
	Size mm	dr mm	Tolerance μm	l mm	Df mm	T mm	Dp mm	X mm	Y mm	Z mm	Eccentricity μm	Squareness μm	Dynamic C N	Static Co N
JPFC08G	8	8	0/-10	20.0	32	5	24	3.5	6.5	3.1	15	15	431	784
JPFC12G	12	12	0/-10	25.5	42	6	32	4.5	8	4.1	15	15	813	1,570
JPFC16G	16	16	0/-10	32.0	48	6	38	4.5	8	4.1	15	15	1,230	2,350
JPFC20G	20	20	0/-12	36.0	54	8	43	5.5	9.3	5.1	20	20	1,400	2,740
JPFC25G	25	25	0/-12	52.0	62	8	51	5.5	9.3	5.1	20	20	1,560	3,140
JPFC30G	30	30	0/-12	56.5	74	10	60	6.6	11	6.1	20	20	2,490	5,490
JPFC40G	40	40	0/-15	69.0	96	13	78	9	14	8.1	25	25	3,430	8,040
JPFC50G	50	50	0/-15	89.5	116	13	98	9	14	8.1	25	25	6,080	15,900



Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series—page 52 Metric Series—page 94

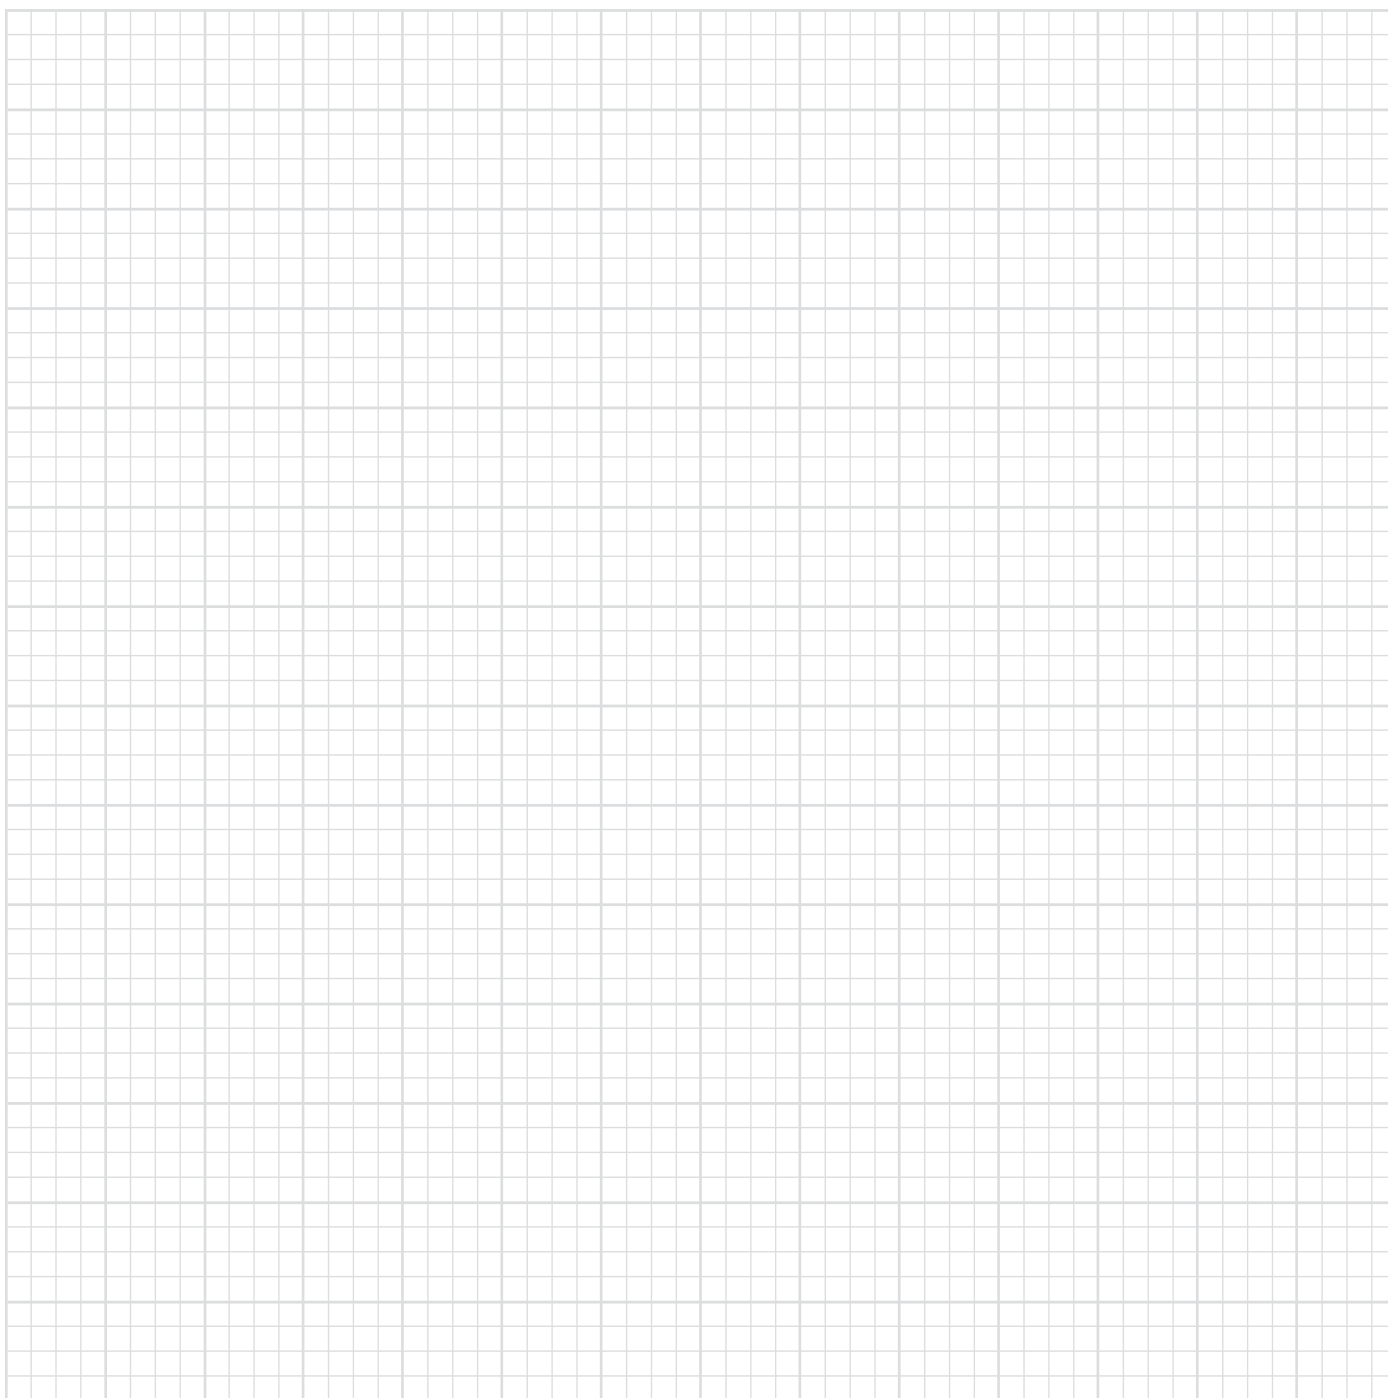

Our Robust Collection of Simplicity Linear Slides

Built tough for heavy loads
and harsh environments

Contact an application engineer
to evaluate your application needs and
receive a quote on your ideal slide solution.



Email an Application Engineer



Configure
Online

Simplicity® Linear Slides Overview

INCH

ISO METRIC

JIS METRIC

Product Overview

Available with plain or ball bearings, Simplicity slides provide solutions in the toughest environments:

Standard components include:

- Mounting plate
- Four pillow block assemblies
- Two steel shafts
- Two aluminum support rails
- Stainless Steel Shaft option


Custom Solutions Available!
Call +1.800.962.8979

Common Applications include:

- Fiberglass manufacturing and processing plants
- Stone cutters and other quarry applications
- Auto manufacturing facilities
- Welding and assembly lines
- Foundries
- Machine tools

Plain Bearing

Ball Bearing

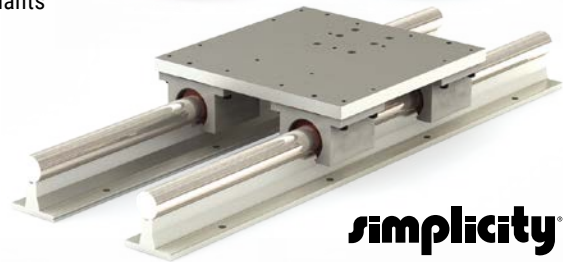


simplicity

Modular Components


- **SRB** – pre-assembled shaft, rail and bearing
- **SRB2** – support rail, guide bar, and two standard Simplicity pillow blocks
- **SRBT** – support rail, guide bar, and one standard Simplicity pillow block



SRB




RS




RPS

High Profile


- **RS** – comes with standard components
- **RPS** – comes with standard components and includes bottom support plate with precision alignment
- **1RPS** – same as RPS with ball screw and one end supported with end plate
- **2RPS** – same as RPS with ball screw and both ends supported with end plates




1RPS



2RPS



LRPS



2LRPS

Low Profile


- **LRPS** – low profile support rail version of a standard RPS
- **2LRPS** – low profile support rail version of a standard 2RPS

Accessories:

- Hand crank with ball screw lock rotational lock
- Handwheel (foldaway)
- Direct drive NEMA 23 & 34 motor bracket kit
- N42, 56, and 143 bracket options available

4 Lifting Points:

- On all bottom support plates for sizes 20, 24, and 32
- On bottom support plate for sizes 12 and 16 with lengths over 60 inches
- Requires 4 eyebolts of 1/2-13, not included

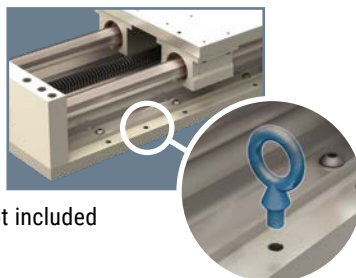


SC2RPS



2HCR & 2HWL



2N42, 2N56,
2N143



2N23 & 2N34

Only certified Simplicity 60 Plus Shafting provides maximum linear bearing performance.

Inch Series - Metric Series

Simplicity® Linear Slides Assembly

Preassembled Shaft, Rail & Bearing SRB

Ordering Example:

To order an assembly with a 0.750" diameter linear shaft, support rail, and one twin double sealed Simplicity bearing with FrelonGOLD®, with a rail length of 96.00", specify part number SRBTD-1200-096.000.

To order an assembly with a 0.625" diameter shaft, support rail, and two single Simplicity bearings without seals, with a rail length of 73.25", specify part number SRB2-1000-073.250.

Note: For lengths over 48", guide bars will be continuous, but rail supports will have a minimum of one break every 48".



Part Number

Series	Size	L
SRBXY X XXX - 08 XX - XXX.XXX		
SRBXY X XXX - 10 XX - XXX.XXX		
SRBXY X XXX - 12 XX - XXX.XXX		
SRBXY X XXX - 16 XX - XXX.XXX		
SRBXY X XXX - 20 XX - XXX.XXX		
SRBXY X XXX - 24 XX - XXX.XXX		
SRBXY X XXX - 32 XX - XXX.XXX		



Custom Solutions Available!
Call 800-962-8979

Enter rail length in inches XXX.XXX (EX: 96" = 096.000)	
Shafting material:	00 = Alloy Steel (Standard) S3 = 316 Stainless Steel S4 = 420 Stainless Steel CC = Ceramic Coated SS = 440 Stainless Steel Note: Ball bearings not suitable with ceramic coated shafting.
Shaft diameter dimension in 1/16" increments	
Internal Lubrication:	No Entry = None (Standard) JKM = Thru hole and internal felt wick
Seals:	No Entry = None Note: "D" double seals are included with standard ball bearings. S = Single Seals D = Double Seals
Pillow Block Style:	2 = Two single PN bearings 3 = Three single PN bearings C = Compensated T = One Twin PWN bearing T2 = Two Twin PWN bearings S1 = One SST PN bearing S2 = Two SST PN bearings
Bearing Type:	No Entry = Simplicity FrelonGOLD E = Simplicity Frelon® J B = Ball Bearing

Standard Length Table

Size	Available Rail Lengths – L* (in inches)																							
08	008	012	016		020	024	028		032	036	040		044	048	052		056	060	064		068	072	076	080
10	008	012	016		020	024	028		032	036	040		044	048	052		056	060	064		068	072	076	080
12		012		018		024		030		036		042		048		054		060		066		072		078
16		012		018		024		030		036		042		048		054		060		066		072		078
20		012		018		024		030		036		042		048		054		060		066		072		078
24			016			024			032		040			048			056		064			072		080
32						024			032		040			048			056		064			072		080

*Contact factory for longer or non-standard lengths – see non-standard lengths ordering example.

Assembly Simplicity® Linear Slides

INCH




ISO METRIC

JIS METRIC

DIMENSIONAL INFORMATION

Series	Size	Linear Shaft Dia.	A	B	C	D	E _T	F _T	E ₂	F ₂	G	H	J	K	M	N	P	R	S
SRBXY	08	0.500	1.125	2.00	1.688	1.50	2.50	3.50	1.000	1.687	0.250	1.812	4.00	2.00	1.125	0.156	0.169	1.000	0.188
SRBXY	10	0.625	1.125	2.50	2.125	1.62	3.00	4.00	1.125	1.937	0.281	2.000	4.00	2.00	1.437	0.188	0.193	1.125	0.250
SRBXY	12	0.750	1.500	2.75	2.375	1.75	3.50	4.50	1.250	2.062	0.312	2.438	6.00	3.00	1.562	0.188	0.221	1.250	0.250
SRBXY	16	1.000	1.750	3.25	2.875	2.12	4.50	6.00	1.750	2.812	0.375	2.938	6.00	3.00	1.937	0.219	0.281	1.500	0.250
SRBXY	20	1.250	2.125	4.00	3.500	2.50	5.50	7.50	2.000	3.625	0.437	3.625	6.00	3.00	2.500	0.219	0.343	1.875	0.312
SRBXY	24	1.500	2.500	4.75	4.125	3.00	6.50	9.00	2.500	4.000	0.500	4.250	8.00	4.00	2.875	0.281	0.343	2.250	0.375
SRBXY	32	2.000	3.250	6.00	5.250	3.75	8.25	10.00	3.250	5.000	0.625	5.375	8.00	4.00	3.625	0.406	0.406	2.750	0.500

Dimensions in inches

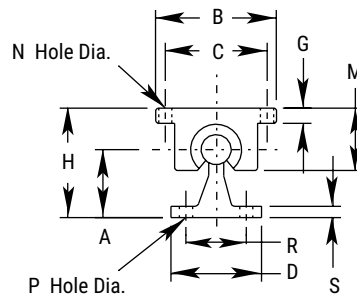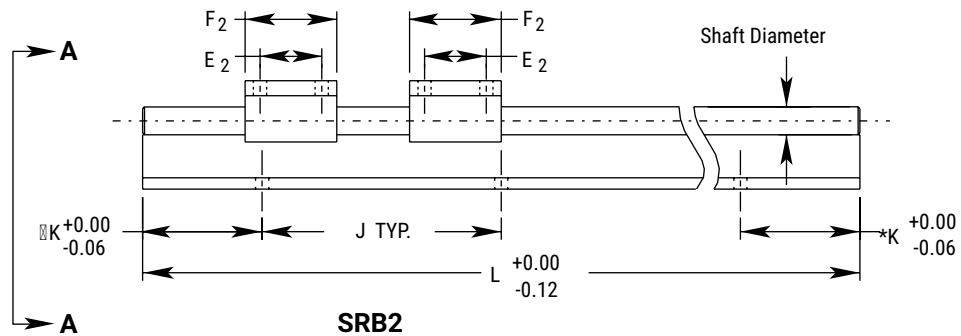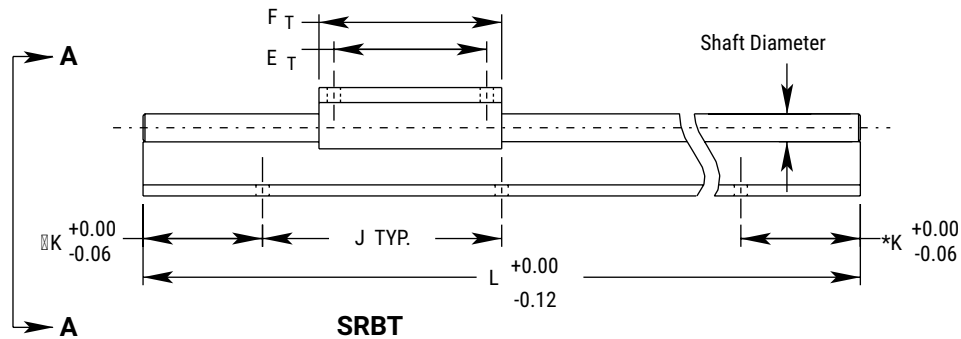

VIEW A - A

* For standard length dimensions consult chart for "K" dimension.

* For non-standard length dimensions "K" can be calculated with the following formula (in all cases equal on both ends).

$K (\text{non-std}) = (K (\text{from chart}) - (\Delta L / 2))$. Where $\Delta L = \text{next longer standard length} - \text{desired length}$.


Simplicity® Linear Slides Rail Mounted

Rail Mounted Slide Assembly RS

Ordering Example:

To order a slide with a 0.625" diameter alloy steel linear shaft, Simplicity bearings with FrelonGOLD® and 28" rail length, specify part number RS-1000-028.000

Note: For lengths over 48", guide bars will be continuous, but rail supports will have a minimum of one break every 48". Lengths and mounting provisions to your specifications are available – consult factory.

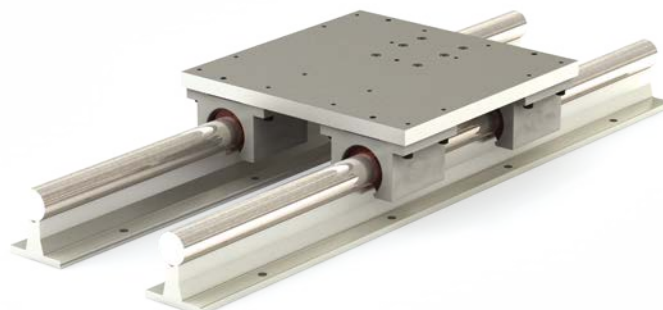

Part Number

Series	Size					L
RS	X	XXX	-	08	XX	XXX.XXX
RS	X	XXX	-	10	XX	XXX.XXX
RS	X	XXX	-	12	XX	XXX.XXX
RS	X	XXX	-	16	XX	XXX.XXX
RS	X	XXX	-	20	XX	XXX.XXX
RS	X	XXX	-	24	XX	XXX.XXX
RS	X	XXX	-	32	XX	XXX.XXX



Custom Solutions Available!
Call 800-962-8979

Enter rail length in inches XXX.XXX (EX: 28" = 028.000)

Shafting material:

00 = Alloy Steel (Standard)

S3 = 316 Stainless Steel

S4 = 420 Stainless Steel

Note: Ball bearings not suitable with ceramic coated shafting.

CC = Ceramic Coated

SS = 440 Stainless Steel

Shaft diameter dimension in 1/16" increments

Internal Lubrication: **No Entry** = None (Standard)

JKM = Thru hole and internal felt wick

Bearing Type:

No Entry = Simplicity FrelonGOLD

E = Simplicity Frelon® J

B = Ball Bearing

Standard Length Table

Size	Available Rail Lengths – L* (in inches)																													
08	008	012	016		020	024	028		032	036	040		044	048	052		056	060	064		068	072	076		080	084	088		092	096
10	008	012	016		020	024	028		032	036	040		044	048	052		056	060	064		068	072	076		080	084	088		092	096
12		012		018		024		030		036		042		048		054		060		066		072		078		084		090		096
16		012		018		024		030		036		042		048		054		060		066		072		078		084		090		096
20		012		018		024		030		036		042		048		054		060		066		072		078		084		090		096
24			016			024			032		040			048			056		064			072			080		088			096
32						024			032		040			048			056		064			072			080		088			096




*Contact factory for longer or non-standard lengths.

Simplicity® Linear Slides Rail Mounted

DIMENSIONAL INFORMATION

Series	Size	Linear Shaft Dia.	W	H	A	B	C	D	E	G	J	R	Tap	Hole Dia.
RS	08	0.500	6.00	2.188	1.125	2.00	3.50	1.500	0.375	5.500	4.00	1.000	10-24	0.17
RS	10	0.625	7.00	2.375	1.125	2.50	4.00	1.625	0.375	6.312	4.00	1.125	1/4-20	0.19
RS	12	0.750	8.00	2.938	1.500	2.75	4.50	1.750	0.500	7.125	6.00	1.250	1/4-20	0.22
RS	16	1.000	9.00	3.438	1.750	3.25	5.50	2.125	0.500	8.312	6.00	1.500	1/4-20	0.28
RS	20	1.250	11.00	4.375	2.125	4.00	6.50	2.500	0.750	10.000	6.00	1.875	5/16-18	0.34
RS	24	1.500	13.00	5.000	2.500	4.75	8.00	3.000	0.750	12.000	8.00	2.250	5/16-18	0.34
RS	32	2.000	18.00	6.375	3.250	6.00	10.00	3.750	1.000	15.880	8.00	2.750	3/8-16	0.41

Dimensions in inches

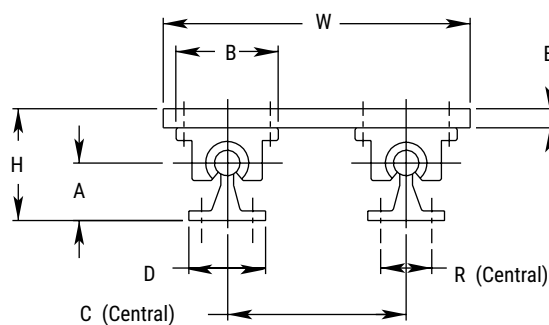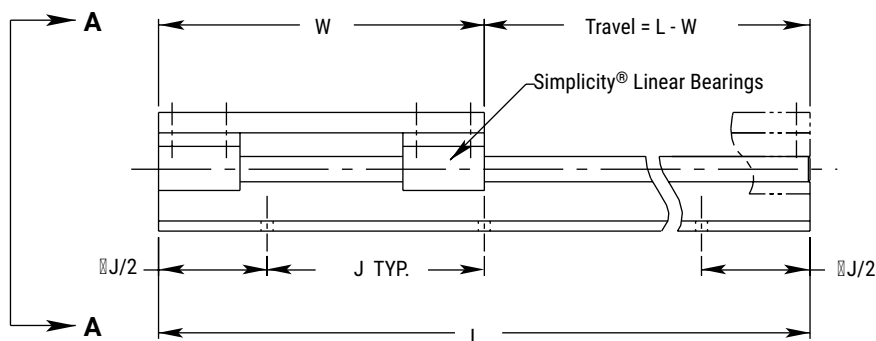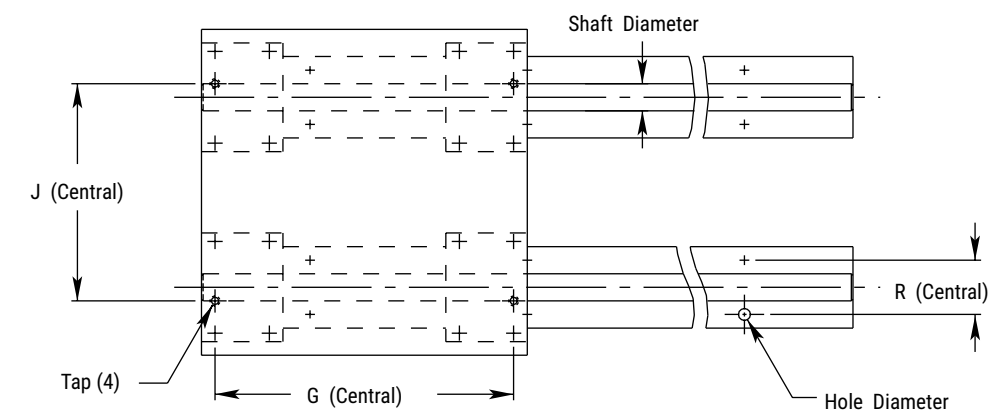

VIEW A - A

*Hole distance to each end is equal unless specified at time of order.

Simplicity® Linear Slides Assembly

Rail Mounted & Plate Supported Slide Assembly RPS

Ordering Example:

To order a slide with a 0.625" diameter alloy steel linear shaft and 28" rail length, specify part number RPS-1000-028.000

Note: For lengths over 48", guide bars will be continuous, but rail supports will have a minimum of one break every 48". Lengths and mounting provisions to your specifications are available – consult factory.



Part Number

Series	Size					L
RPS	X	XXX	-	08	XX	- XXX.XXX
RPS	X	XXX	-	10	XX	- XXX.XXX
RPS	X	XXX	-	12	XX	- XXX.XXX
RPS	X	XXX	-	16	XX	- XXX.XXX
RPS	X	XXX	-	20	XX	- XXX.XXX
RPS	X	XXX	-	24	XX	- XXX.XXX
RPS	X	XXX	-	32	XX	- XXX.XXX



Custom Solutions Available!
Call 800-962-8979

Enter rail length in inches XXX.XXX (EX: 28" = 028.000)

Shafting material: **00** = Alloy Steel (Standard)
S3 = 316 Stainless Steel
S4 = 420 Stainless Steel
Note: Ball bearings not suitable with ceramic coated shafting.

Shaft diameter dimension in 1/16" increments

Internal Lubrication: **No Entry** = None (Standard)

Bearing Type: **No Entry** = Simplicity FrelonGOLD®

CC = Ceramic Coated
SS = 440 Stainless Steel

JKM = Thru hole and internal felt wick

E = Simplicity Frelon® J **B** = Ball Bearing

Standard Length Table

Size	Available Rail Lengths – L* (in inches)																													
08	008	012	016		020	024	028		032	036	040		044	048	052		056	060	064		068	072	076		080	084	088		092	096
10	008	012	016		020	024	028		032	036	040		044	048	052		056	060	064		068	072	076		080	084	088		092	096
12		012		018		024		030		036		042		048		054		060		066		072		078		084		090		096
16		012		018		024		030		036		042		048		054		060		066		072		078		084		090		096
20		012		018		024		030		036		042		048		054		060		066		072		078		084		090		096
24			016			024			032		040			048			056		064			072			080		088			096
32						024			032		040			048			056		064			072			080		088			096




*Contact factory for longer or non-standard lengths.

Simplicity® Linear Slides Assembly

DIMENSIONAL INFORMATION

Series	Size	Linear Shaft Dia.	W	H	A	B	C	D	E	F	G	J	Tap	Hole Dia.
RPS	08	0.500	6.00	2.562	1.125	2.00	3.50	1.500	0.375	1.00	5.500	4.00	10-24	0.22
RPS	10	0.625	7.00	2.750	1.125	2.50	4.00	1.625	0.375	1.00	6.312	4.00	1/4-20	0.28
RPS	12	0.750	8.00	3.438	1.500	2.75	4.50	1.750	0.500	1.25	7.125	6.00	1/4-20	0.28
RPS	16	1.000	9.00	3.938	1.750	3.25	5.50	2.125	0.500	1.25	8.312	6.00	1/4-20	0.28
RPS	20	1.250	11.00	5.125	2.125	4.00	6.50	2.500	0.750	1.50	10.000	6.00	5/16-18	0.34
RPS	24	1.500	13.00	5.750	2.500	4.75	8.00	3.000	0.750	1.50	12.000	8.00	5/16-18	0.34
RPS	32	2.000	18.00	7.375	3.250	6.00	10.00	3.750	1.000	1.75	15.875	8.00	3/8-16	0.41

Dimensions in inches

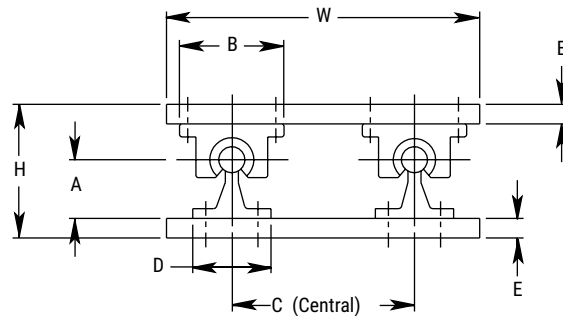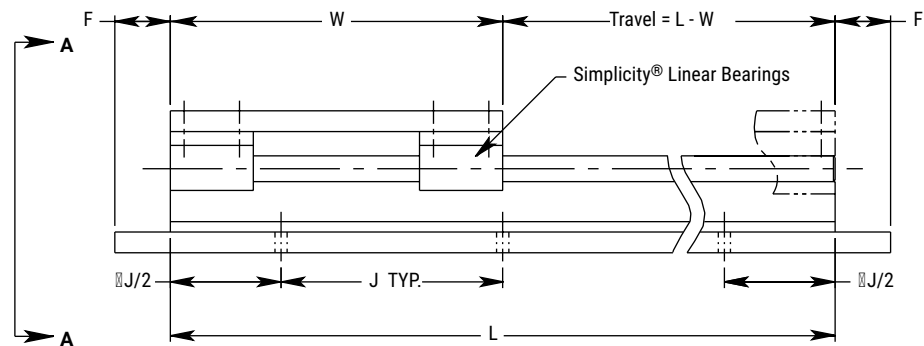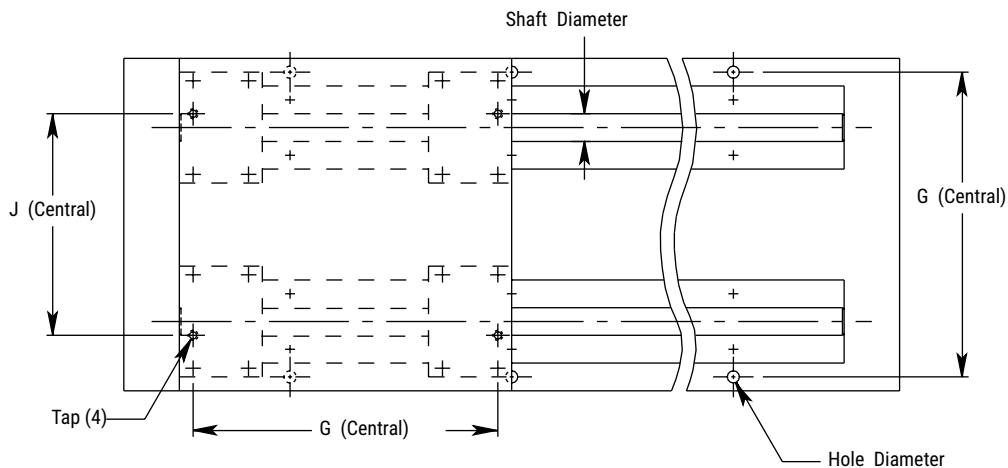

VIEW A - A

*Hole distance to each end is equal unless specified at time of order.


Simplicity® Linear Slides One End Support

Rail Mounted & Plate Supported – Ball Screw Driven 1RPS

SUPPORTED ON ONE END

Ordering Example:

To order a slide with a 0.625" diameter 440 stainless steel linear shaft, 28" rail length, 0.200" right hand select ball screw, specify part number 1RPS-10SS-028.000-AA7R.

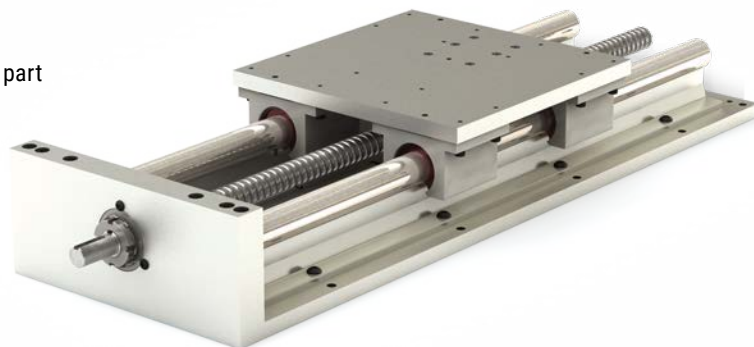

Part Number

Series	Size	L	Lead
1RPS	X XXX - 08 XX - XXX.XXX - YYYY		
1RPS	X XXX - 10 XX - XXX.XXX - YYYY		
1RPS	X XXX - 12 XX - XXX.XXX - YYYY		
1RPS	X XXX - 16 XX - XXX.XXX - YYYY		
1RPS	X XXX - 20 XX - XXX.XXX - YYYY		
1RPS	X XXX - 24 XX - XXX.XXX - YYYY		
1RPS	X XXX - 32 XX - XXX.XXX - YYYY		

Substitute standard or select lead code from table for "YYYY"

Enter rail length in inches XXX.XXX (EX: 28" = 028.000)

Shafting material:

00 = Alloy Steel (Standard)

S3 = 316 Stainless Steel

S4 = 420 Stainless Steel

CC = Ceramic Coated

SS = 440 Stainless Steel

Note: Ball bearings not suitable with ceramic coated shafting.

Shaft diameter dimension in 1/16" increments

Internal Lubrication: **No Entry** = None (Standard)

JKM = Thru hole and internal felt wick

Bearing Type:

No Entry = Simplicity FrelonGOLD®

E = Simplicity Frelon® J

B = Ball Bearing

Standard Lead Table

Accurate to less than 0.007" per foot accumulative

Size	Available Lead Codes					
08	AAXR	AAXL				
10	AAXR	AAXL				
12	AAXR	AAXL				
16			ABXR	ABXL	ACXR	ADXR
20			ABXR	ABXL	ACXR	ADXR
24			ABXR	ABXL	ACXR	ADXR
32			ABXR	ABXL	ACXR	ADXR

AAXR = 0.20 Right Hand
AAXL = 0.20 Left Hand
ABXR = 0.25 Right Hand
ABXL = 0.25 Left Hand
ACXR = 0.50 Right Hand
ADXR = 1.00 Right Hand
ADXL = 1.00 Left Hand

Note: Additional leads available upon request.

Select Lead Table

Accurate to less than 0.003" per foot accumulative

Size	Available Lead Codes					
08	AA7R	AA7L				
10	AA7R	AA7L				
12	AA7R	AA7L				
16			AB7R	AB7L	AC7R	AD7R
20			AB7R	AB7L	AC7R	AD7R
24			AB7R	AB7L	AC7R	AD7R
32			AB7R	AB7L	AC7R	AD7R

AA7R = 0.20 Right Hand
AA7L = 0.20 Left Hand
AB7R = 0.25 Right Hand
AB7L = 0.25 Left Hand
AC7R = 0.50 Right Hand
AD7R = 1.00 Right Hand
AD7L = 1.00 Left Hand

Note: Additional leads available upon request.

Standard Length Table

Size	Available Rail Lengths – L* (in inches)									
08	008	012	016		020	024	028		032	
10	008	012	016		020	024	028		032	
12		012		018		024		030		036
16		012		018		024		030		036
20		012		018		024		030		036
24			016			024			032	040
32						024			032	040

*Contact factory for longer or non-standard lengths.



Custom Solutions Available!
Call 800-962-8979

One End Support **Simplicity®** Linear Slides

INCH


ISO METRIC

JIS METRIC

DIMENSIONAL INFORMATION

Series	Size	Linear Shaft Dia.	W	H	A	B	C	D	E	F	G	J	K	M	N	O	Tap	Hole Dia.	Key
1RPS	08	0.500	6.00	2.562	1.125	2.00	3.50	1.500	0.375	1.00	5.500	4.00	1.375	0.375	1.45	0.63	10-24	0.22	3/32 sq x 5/8 lg
1RPS	10	0.625	7.00	2.750	1.125	2.50	4.00	1.625	0.375	1.00	6.312	4.00	1.375	0.375	1.45	0.63	1/4-20	0.28	3/32 sq x 5/8 lg
1RPS	12	0.750	8.00	3.438	1.500	2.75	4.50	1.750	0.500	1.25	7.125	6.00	1.500	0.375	1.45	0.63	1/4-20	0.28	3/32 sq x 5/8 lg
1RPS	16	1.000	9.00	3.938	1.750	3.25	5.50	2.125	0.500	1.25	8.312	6.00	2.125	0.625	1.76	1.00	1/4-20	0.28	3/16 sq x 1" lg
1RPS	20	1.250	11.00	5.125	2.125	4.00	6.50	2.500	0.750	1.50	10.000	6.00	2.375	0.625	1.76	1.00	5/16-18	0.34	3/16 sq x 1" lg
1RPS	24	1.500	13.00	5.750	2.500	4.75	8.00	3.000	0.750	1.50	12.000	8.00	2.875	0.875	2.31	1.50	5/16-18	0.34	1/4 sq x 1.62 lg
1RPS	32	2.000	18.00	7.375	3.250	6.00	10.00	3.750	1.000	1.75	15.875	8.00	3.875	0.875	2.31	1.50	3/8-16	0.41	1/4 sq x 1.62 lg

Dimensions in inches

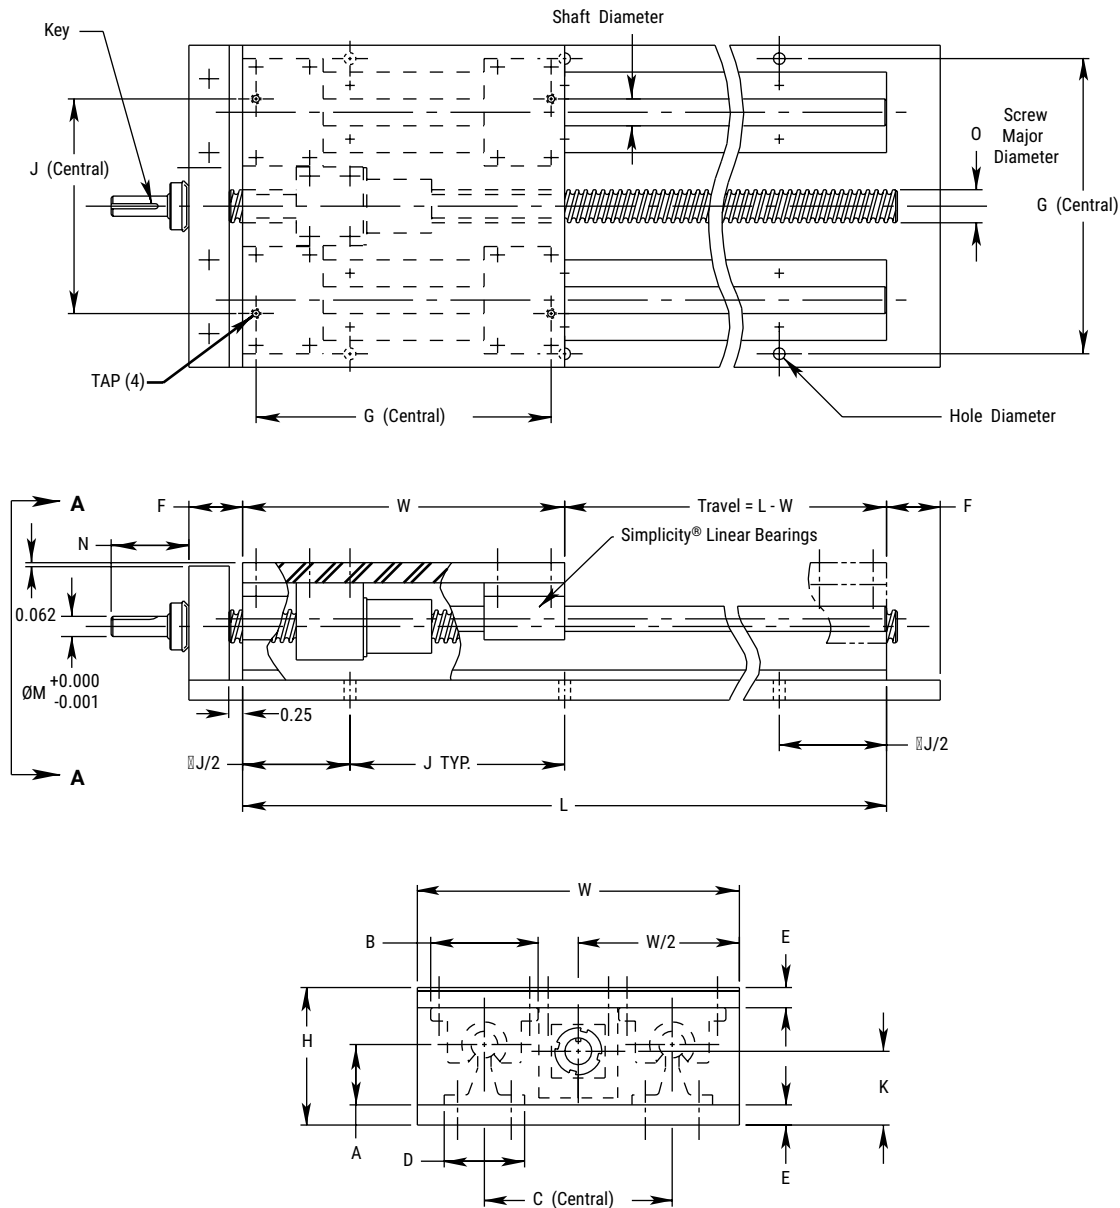

VIEW A - A

*Hole distance to each end is equal unless specified at time of order.

Simplicity® Linear Slides Both Ends Supported

Rail Mounted & Plate Supported – Ball Screw Driven 2RPS

SUPPORTED ON BOTH ENDS


Ordering Example:

To order a slide with a 0.625" diameter alloy steel linear shaft, 28" rail length, 0.200" right hand select ball screw, specify part number 2RPS-1000-028.000-AA7R.



Part Number

Series	Size			L			Lead
2RPS	X	XXX	- 08	XX	- XXX.XXX	-	YYYY
2RPS	X	XXX	- 10	XX	- XXX.XXX	-	YYYY
2RPS	X	XXX	- 12	XX	- XXX.XXX	-	YYYY
2RPS	X	XXX	- 16	XX	- XXX.XXX	-	YYYY
2RPS	X	XXX	- 20	XX	- XXX.XXX	-	YYYY
2RPS	X	XXX	- 24	XX	- XXX.XXX	-	YYYY
2RPS	X	XXX	- 32	XX	- XXX.XXX	-	YYYY

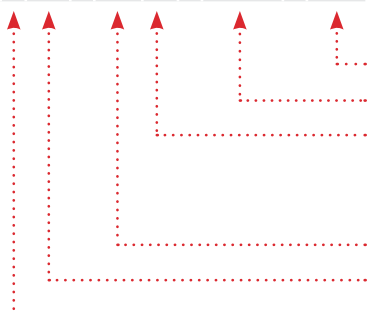

Substitute standard or select lead code from table for "YYYY"

Enter rail length in inches XXX.XXX (EX: 28" = 028.000)

Shafting material:

00 = Alloy Steel (Standard)

S3 = 316 Stainless Steel

S4 = 420 Stainless Steel

Note: Ball bearings not suitable with ceramic coated shafting.

CC = Ceramic Coated

SS = 440 Stainless Steel

Shaft diameter dimension in 1/16" increments

Internal Lubrication: **No Entry** = None (Standard)

JKM = Thru hole and internal felt wick

Bearing Type: **No Entry** = Simplicity FrelonGOLD®

E = Simplicity Frelon® J

B = Ball Bearing

Standard Lead Table

Accurate to less than 0.007" per foot accumulative

Size	Available Lead Codes					
08	AAXR	AAXL				
10	AAXR	AAXL				
12	AAXR	AAXL				
16			ABXR	ABXL	ACXR	ADXR
20			ABXR	ABXL	ACXR	ADXR
24			ABXR	ABXL	ACXR	ADXR
32			ABXR	ABXL	ACXR	ADXR

AAXR = 0.20 Right Hand
AAXL = 0.20 Left Hand
ABXR = 0.25 Right Hand
ABXL = 0.25 Left Hand
ACXR = 0.50 Right Hand
ADXR = 1.00 Right Hand
ADXL = 1.00 Left Hand

Note: Additional leads available upon request.

Select Lead Table

Accurate to less than 0.003" per foot accumulative

Size	Available Lead Codes					
08	AA7R	AA7L				
10	AA7R	AA7L				
12	AA7R	AA7L				
16			AB7R	AB7L	AC7R	AD7R
20			AB7R	AB7L	AC7R	AD7R
24			AB7R	AB7L	AC7R	AD7R
32			AB7R	AB7L	AC7R	AD7R

AA7R = 0.20 Right Hand
AA7L = 0.20 Left Hand
AB7R = 0.25 Right Hand
AB7L = 0.25 Left Hand
AC7R = 0.50 Right Hand
AD7R = 1.00 Right Hand
AD7L = 1.00 Left Hand

Note: Additional leads available upon request.

Standard Length Table

Size	Available Rail Lengths - L * (in inches)																							
08	008	012	016		020	024	028		032	036	040		044	048	052		056	060	064		068	072	076	
10	008	012	016		020	024	028		032	036	040		044	048	052		056	060	064		068	072	076	
12		012		018		024		030		036		042		048		054		060		066		072		078
16		012		018		024		030		036		042		048		054		060		066		072		078
20		012		018		024		030		036		042		048		054		060		066		072		078
24			016			024			032		040			048			056		064			072		080
32						024			032		040			048			056		064			072		080




*Contact factory for longer or non-standard lengths.

Simplicity® Linear Slides Both Ends Supported

DIMENSIONAL INFORMATION

Series	Size	Linear Shaft Dia.	W	H	A	B	C	D	E	F	G	J	K	M	N	O	Tap	Hole Dia.	Key
2RPS	08	0.500	6.00	2.562	1.125	2.00	3.50	1.500	0.375	1.00	5.500	4.00	1.375	0.375	1.45	0.63	10-24	0.22	3/32 sq x 5/8 lg
2RPS	10	0.625	7.00	2.750	1.125	2.50	4.00	1.625	0.375	1.00	6.312	4.00	1.375	0.375	1.45	0.63	1/4-20	0.28	3/32 sq x 5/8 lg
2RPS	12	0.750	8.00	3.438	1.500	2.75	4.50	1.750	0.500	1.25	7.125	6.00	1.500	0.375	1.45	0.63	1/4-20	0.28	3/32 sq x 5/8 lg
2RPS	16	1.000	9.00	3.938	1.750	3.25	5.50	2.125	0.500	1.25	8.312	6.00	2.125	0.625	1.76	1.00	1/4-20	0.28	3/16 sq x 1" lg
2RPS	20	1.250	11.00	5.125	2.125	4.00	6.50	2.500	0.750	1.50	10.000	6.00	2.375	0.625	1.76	1.00	5/16-18	0.34	3/16 sq x 1" lg
2RPS	24	1.500	13.00	5.750	2.500	4.75	8.00	3.000	0.750	1.50	12.000	8.00	2.875	0.875	2.31	1.50	5/16-18	0.34	1/4 sq x 1.62 lg
2RPS	32	2.000	18.00	7.375	3.250	6.00	10.00	3.750	1.000	1.75	15.875	8.00	3.875	0.875	2.31	1.50	3/8-16	0.41	1/4 sq x 1.62 lg

Dimensions in inches

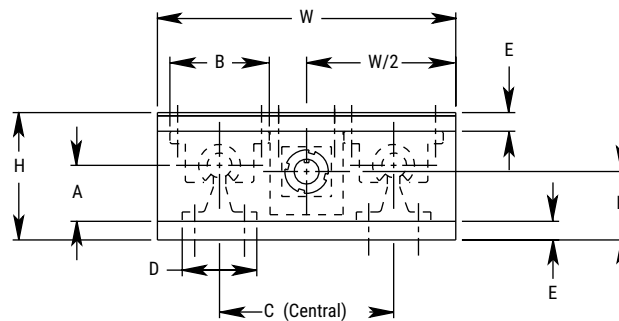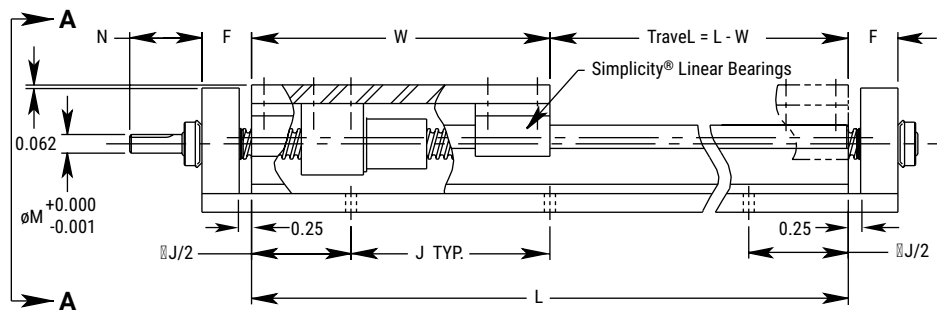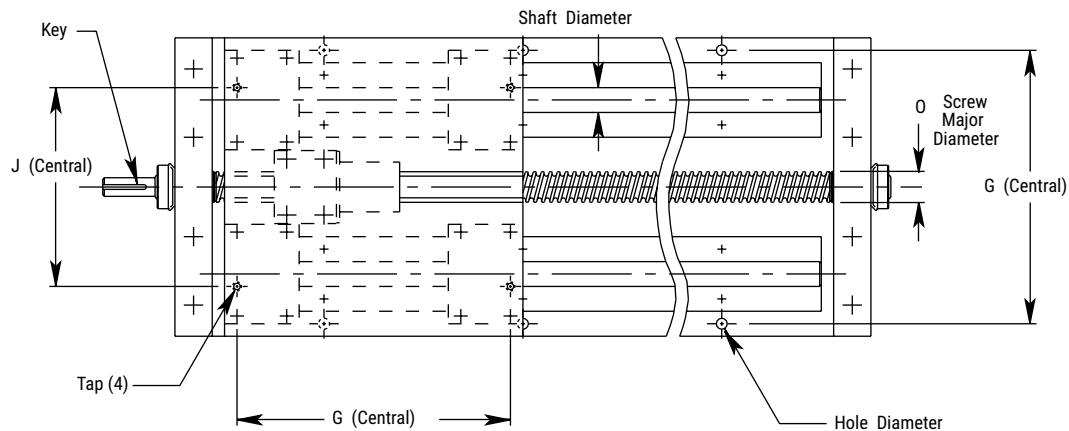

VIEW A - A

*Hole distance to each end is equal unless specified at time of order.


Simplicity® Linear Slides Low Profile

Rail Mounted & Plate Supported Slide Assembly LRPS

LOW PROFILE

Ordering Example:

To order a slide with a 0.625" diameter alloy steel linear shaft and 28" rail length, specify part number LRPS-1000-028.000.

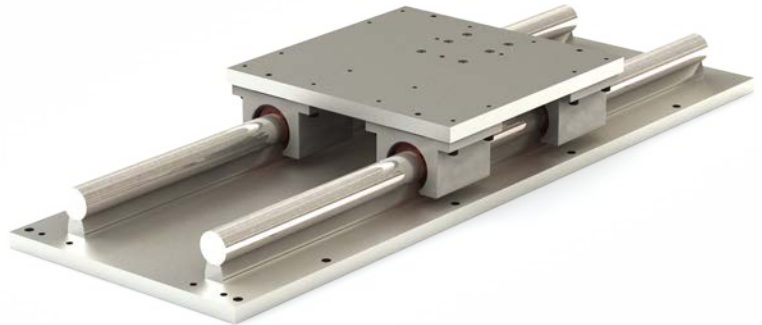

Part Number

Series	Size					L
LRPS	X	XXX	-	08	XX	XXX.XXX
LRPS	X	XXX	-	10	XX	XXX.XXX
LRPS	X	XXX	-	12	XX	XXX.XXX
LRPS	X	XXX	-	16	XX	XXX.XXX
LRPS	X	XXX	-	20	XX	XXX.XXX
LRPS	X	XXX	-	24	XX	XXX.XXX
LRPS	X	XXX	-	32	XX	XXX.XXX



Custom Solutions Available!
Call 800-962-8979

Enter rail length in inches XXX.XXX (EX: 28" = 028.000)

Shafting material: **00** = Alloy Steel (Standard) **CC** = Ceramic Coated
S3 = 316 Stainless Steel **SS** = 440 Stainless Steel
S4 = 420 Stainless Steel
Note: Ball bearings not suitable with ceramic coated shafting.

Shaft diameter dimension in 1/16" increments

Internal Lubrication: **No Entry** = None (Standard) **JKM** = Thru hole and internal felt wick

Bearing Type: **No Entry** = Simplicity FrelonGOLD® **E** = Simplicity Frelon® J **B** = Ball Bearing

Standard Length Table

Size	Available Rail Lengths – L* (in inches)																													
08	008	012	016		020	024	028		032	036	040		044	048	052		056	060	064		068	072	076		080	084	088		092	096
10	008	012	016		020	024	028		032	036	040		044	048	052		056	060	064		068	072	076		080	084	088		092	096
12		012		018		024		030		036		042		048		054		060		066		072		078		084		090		096
16		012		018		024		030		036		042		048		054		060		066		072		078		084		090		096
20		012		018		024		030		036		042		048		054		060		066		072		078		084		090		096
24			016			024			032		040			048			056		064			072			080		088			096
32						024			032		040			048			056		064			072			080		088			096




*Contact factory for longer or non-standard lengths.

Simplicity® Linear Slides Low Profile

DIMENSIONAL INFORMATION

Series	Size	Linear Shaft Dia.	W	H	A	B	C	D	E	F	G	J	Tap	Hole Dia.
LRPS	08	0.500	6.00	2.000	0.563	2.00	3.50	0.37	0.375	1.00	5.500	4.00	10-24	0.22
LRPS	10	0.625	7.00	2.313	0.688	2.50	4.00	0.45	0.375	1.00	6.312	4.00	1/4-20	0.28
LRPS	12	0.750	8.00	2.688	0.750	2.75	4.50	0.51	0.500	1.25	7.125	6.00	1/4-20	0.28
LRPS	16	1.000	9.00	3.188	1.000	3.25	5.50	0.69	0.500	1.25	8.312	6.00	1/4-20	0.28
LRPS	20	1.250	11.00	4.188	1.188	4.00	6.50	0.78	0.750	1.50	10.000	6.00	5/16-18	0.34
LRPS	24	1.500	13.00	4.625	1.375	4.75	8.00	0.93	0.750	1.50	12.000	8.00	5/16-18	0.34
LRPS	32	2.000	18.00	5.875	1.750	6.00	10.00	1.18	1.000	1.75	15.875	8.00	3/8-16	0.41

Dimensions in inches

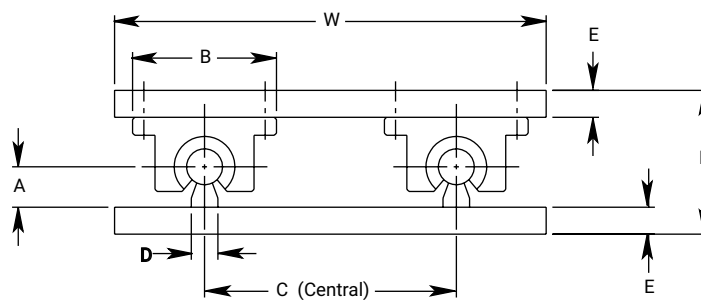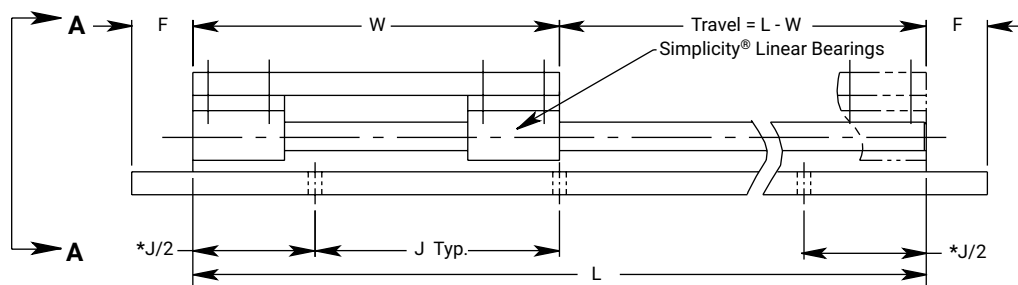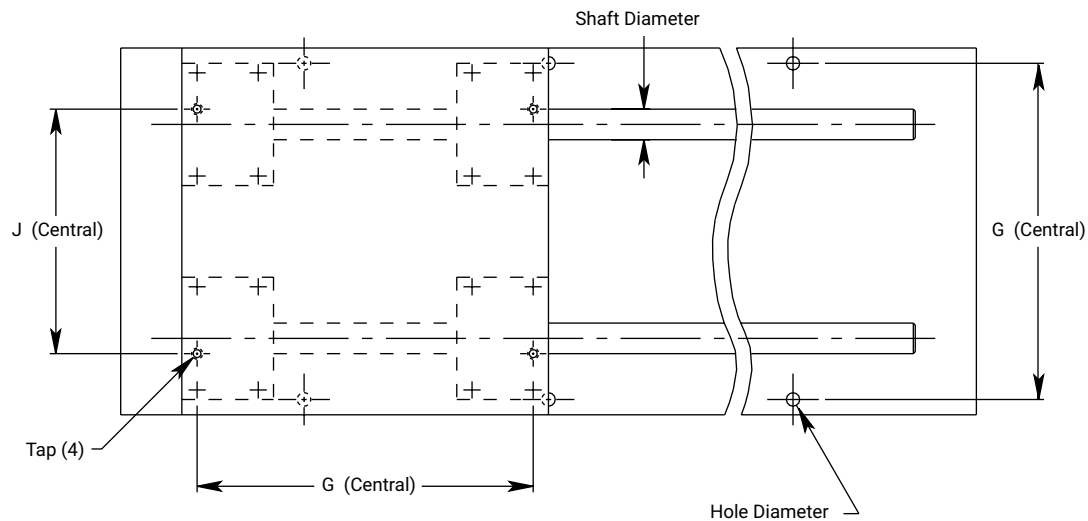

View A - A

*Hole distance to each end is equal unless specified at time of order.


Simplicity® Linear Slides Low Profile Ball Screw

Rail Mounted & Plate Ball Screw Driven 2LRPS

LOW PROFILE – SUPPORTED ON BOTH ENDS


Ordering Example:

To order a slide with a 0.625" diameter alloy steel linear shaft, 28" rail length, 0.200" right hand select ball screw – specify part number, 2LRPS-1000-028.000-AA7R.

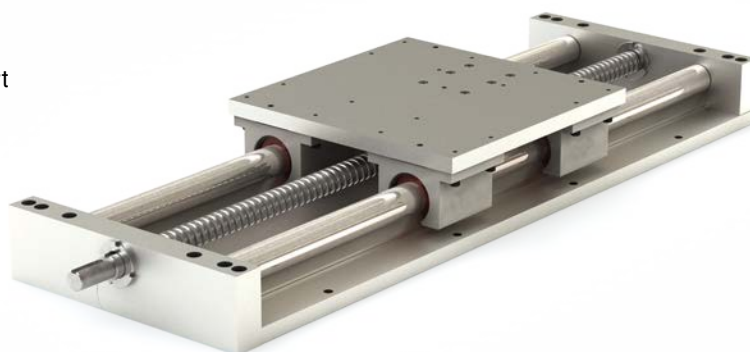

Part Number

Series	Size	L	Lead
2LRPS X XXX - 08 XX - XXX.XXX - YYYY			
2LRPS X XXX - 10 XX - XXX.XXX - YYYY			
2LRPS X XXX - 12 XX - XXX.XXX - YYYY			
2LRPS X XXX - 16 XX - XXX.XXX - YYYY			
2LRPS X XXX - 20 XX - XXX.XXX - YYYY			
2LRPS X XXX - 24 XX - XXX.XXX - YYYY			
2LRPS X XXX - 32 XX - XXX.XXX - YYYY			

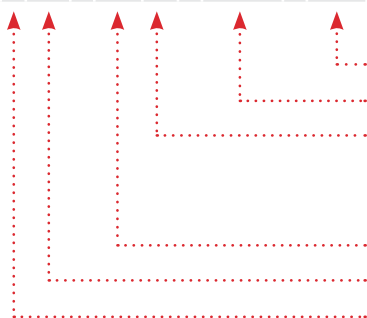

Substitute standard or select lead code from table for "YYYY"

Enter rail length in inches XXX.XXX (EX: 28" = 028.000)

Shafting material:

00 = Alloy Steel (Standard)

S3 = 316 Stainless Steel

S4 = 420 Stainless Steel

Note: Ball bearings not suitable with ceramic coated shafting.

CC = Ceramic Coated

SS = 440 Stainless Steel

Shaft diameter dimension in 1/16" increments

Internal Lubrication: **No Entry** = None (Standard)

JKM = Thru hole and internal felt wick

Bearing Type:

No Entry = Simplicity FrelonGOLD®

B = Ball Bearing

E = Simplicity Frelon®J

Standard Lead Table

Accurate to less than 0.007" per foot accumulative

Size	Available Lead Codes					
08	AAXR	AAXL				
10	AAXR	AAXL				
12	AAXR	AAXL				
16			ABXR	ABXL	ACXR	ADXR
20			ABXR	ABXL	ACXR	ADXR
24			ABXR	ABXL	ACXR	ADXR
32			ABXR	ABXL	ACXR	ADXR

AAXR = 0.20 Right Hand
AAXL = 0.20 Left Hand
ABXR = 0.25 Right Hand
ABXL = 0.25 Left Hand
ACXR = 0.50 Right Hand
ADXR = 1.00 Right Hand
ADXL = 1.00 Left Hand

Note: Additional leads available upon request.

Select Lead Table

Accurate to less than 0.003" per foot accumulative

Size	Available Lead Codes					
08	AA7R	AA7L				
10	AA7R	AA7L				
12	AA7R	AA7L				
16			AB7R	AB7L	AC7R	AD7R
20			AB7R	AB7L	AC7R	AD7R
24			AB7R	AB7L	AC7R	AD7R
32			AB7R	AB7L	AC7R	AD7R

AA7R = 0.20 Right Hand
AA7L = 0.20 Left Hand
AB7R = 0.25 Right Hand
AB7L = 0.25 Left Hand
AC7R = 0.50 Right Hand
AD7R = 1.00 Right Hand
AD7L = 1.00 Left Hand

Note: Additional leads available upon request.

Standard Length Table

Size	Available Rail Lengths – L* (in inches)																							
08	008	012	016		020	024	028		032	036	040		044	048	052		056	060	064		068	072	076	
10	008	012	016		020	024	028		032	036	040		044	048	052		056	060	064		068	072	076	
12		012		018		024		030		036		042		048		054		060		066		072		078
16		012		018		024		030		036		042		048		054		060		066		072		078
20		012		018		024		030		036		042		048		054		060		066		072		078
24			016			024		032		040			048			056		064			072			080
32						024		032		040			048			056		064			072			080




*Contact factory for longer or non-standard lengths.

Simplicity® Linear Slides Low Profile Ball Screw

DIMENSIONAL INFORMATION

Series	Size	Linear Shaft Dia.	W	H	A	B	C	D	E	F	G	J	K	M	N	O	Tap	Hole Dia.	Key
2LRPS	08	0.500	6.00	2.000	0.563	2.00	3.50	0.37	0.375	1.00	5.500	4.00	1.000	0.375	1.45	0.63	10-24	0.22	3/32 sq x 5/8 lg
2LRPS	10	0.625	7.00	2.313	0.688	2.50	4.00	0.45	0.375	1.00	6.312	4.00	1.156	0.375	1.45	0.63	1/4-20	0.28	3/32 sq x 5/8 lg
2LRPS	12	0.750	8.00	2.688	0.750	2.75	4.50	0.51	0.500	1.25	7.125	6.00	1.344	0.375	1.45	0.63	1/4-20	0.28	3/32 sq x 5/8 lg
2LRPS	16	1.000	9.00	3.188	1.000	3.25	5.50	0.69	0.500	1.25	8.312	6.00	1.594	0.625	1.76	1.00	1/4-20	0.28	3/16 sq x 1" lg
2LRPS	20	1.250	11.00	4.188	1.188	4.00	6.50	0.78	0.750	1.50	10.000	6.00	2.094	0.625	1.76	1.00	5/16-18	0.34	3/16 sq x 1" lg
2LRPS	24	1.500	13.00	4.625	1.375	4.75	8.00	0.93	0.750	1.50	12.000	8.00	2.312	0.875	2.31	1.50	5/16-18	0.34	1/4 sq x 1.62 lg
2LRPS	32	2.000	18.00	5.875	1.750	6.00	10.00	1.18	1.000	1.75	15.875	8.00	2.937	0.875	2.31	1.50	3/8-16	0.41	1/4 sq x 1.62 lg

Dimensions in inches

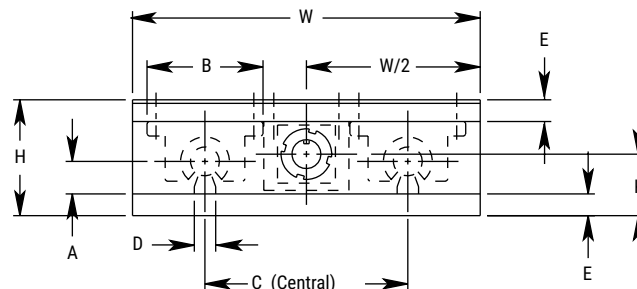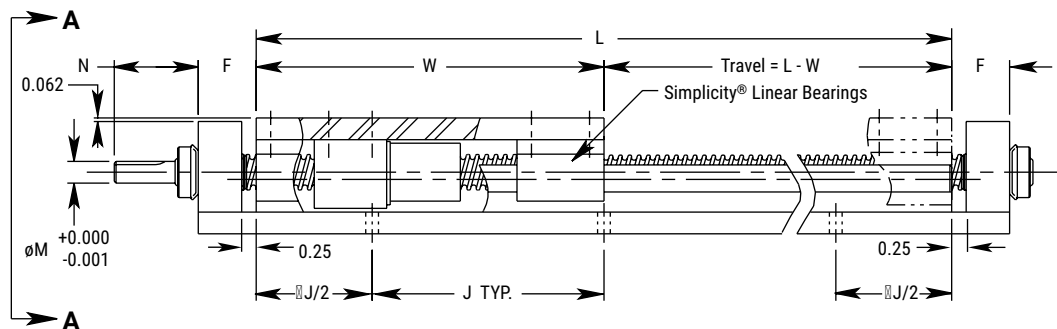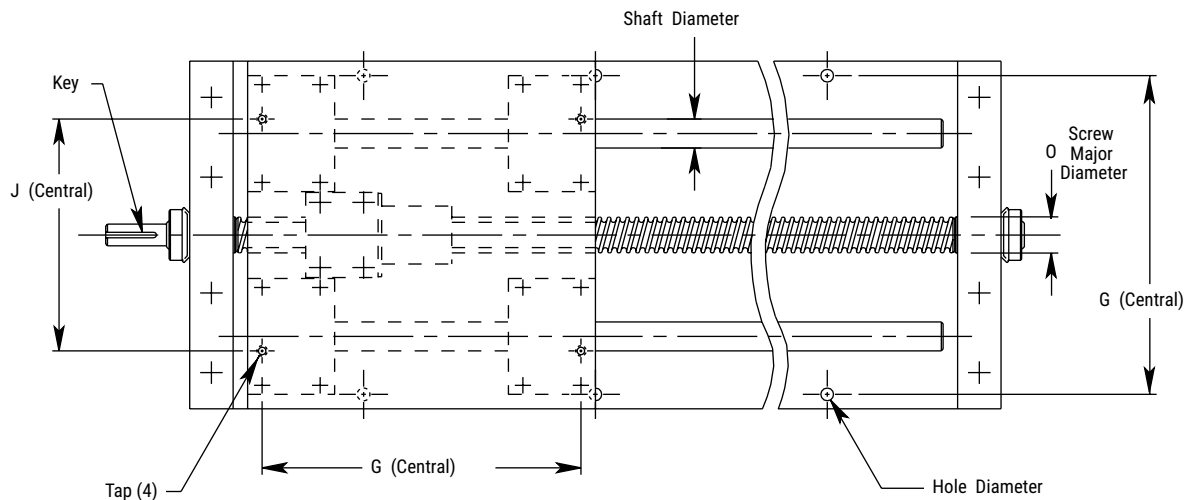

VIEW A - A


*Hole distance to each end is equal unless specified at time of order.

Simplicity® Linear Slides Self Centering

Self-Centering Slide Assembly SC2RPS


Ordering Example:

To order a slide with a 0.625" diameter alloy steel linear shaft, 56" rail length, 0.200" right hand select lead screw – specify part number, SC2RPS-1000-056.000-AA7LR.

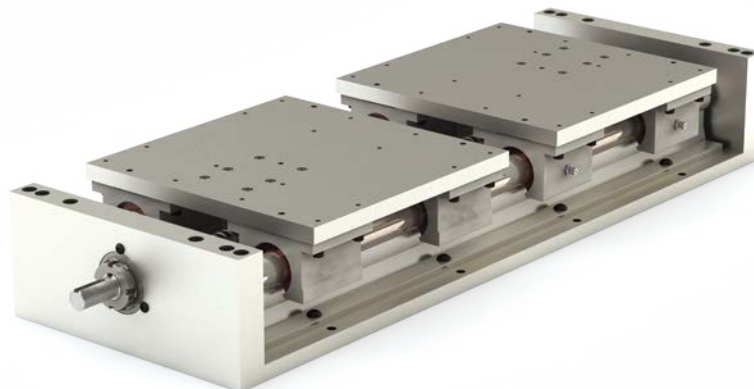

Part Number

Series	Size	L	Lead
SC2RPS X XXX - 08 XX - XXX.XXX - YYYY			
SC2RPS X XXX - 10 XX - XXX.XXX - YYYY			
SC2RPS X XXX - 12 XX - XXX.XXX - YYYY			
SC2RPS X XXX - 16 XX - XXX.XXX - YYYY			
SC2RPS X XXX - 20 XX - XXX.XXX - YYYY			
SC2RPS X XXX - 24 XX - XXX.XXX - YYYY			
SC2RPS X XXX - 32 XX - XXX.XXX - YYYY			

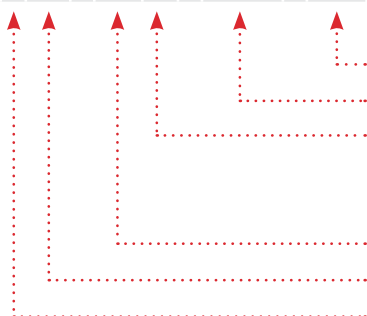

Substitute standard or select lead code from table for "YYYY"

Enter rail length in inches XXX.XXX (EX: 28" = 028.000)

Shafting material:

00 = Alloy Steel (Standard)

S3 = 316 Stainless Steel

S4 = 420 Stainless Steel

Note: Ball bearings not suitable with ceramic coated shafting.

CC = Ceramic Coated

SS = 440 Stainless Steel

Shaft diameter dimension in 1/16" increments

Internal Lubrication: **No Entry** = None (Standard)

JKM = Thru hole and internal felt wick

Bearing Type:

No Entry = Simplicity FrelonGOLD®

B = Ball Bearing

E = Simplicity Frelon® J

Standard Lead Table

Accurate to less than 0.007" per foot accumulative

Size	Available Lead Codes
08	AAXLR
10	AAXLR
12	AAXLR
16	ABXLR
20	ABXLR
24	ABXLR
32	ABXLR

AAXLR = 0.20 Leads
ABXLR = 0.25 Leads
ADXLR = 1.00 Leads
One left and one right hand lead ballscrew on each self-centering slide assembly.

Note: Additional leads available upon request.

Select Lead Table

Accurate to less than 0.003" per foot accumulative

Size	Available Lead Codes
08	AA7LR
10	AA7LR
12	AA7LR
16	AB7LR
20	AB7LR
24	AB7LR
32	AB7LR

AA7LR = 0.20 Leads
AB7LR = 0.25 Leads
AD7LR = 1.00 Leads
One left and one right hand lead ballscrew on each self-centering slide assembly.

Note: Additional leads available upon request.

Standard Length Table

Size	Available Rail Lengths – L* (in inches)																											
08	016		020	024	028		032	036	040		044	048	052		056	060	064		068	072	076		080	084	088		092	096
10	016		020	024	028		032	036	040		044	048	052		056	060	064		068	072	076		080	084	088		092	096
12		018		024		030		036		042		048		054		060		066		072		078		084		090		096
16				024		030		036		042		048		054		060		066		072		078		084		090		096
20				024		030		036		042		048		054		060		066		072		078		084		090		096
24							032		040			048			056		064			072			080		088			096
32									040			048			056		064			072			080		088			096




*Contact factory for longer or non-standard lengths.

Simplicity® Linear Slides Self Centering


DIMENSIONAL INFORMATION

Series	Size	Linear Shaft Dia.	W	H	A	B	C	D	E	F	G	J	K	M	N	O	Tap	Hole Dia.	Key
SC2RPS	08	0.500	6.00	2.562	1.125	2.00	3.50	1.500	0.375	1.00	5.500	4.00	1.375	0.375	1.45	0.63	10-24	0.22	3/32 sq x 5/8 lg
SC2RPS	10	0.625	7.00	2.750	1.125	2.50	4.00	1.625	0.375	1.00	6.312	4.00	1.375	0.375	1.45	0.63	1/4-20	0.28	3/32 sq x 5/8 lg
SC2RPS	12	0.750	8.00	3.438	1.500	2.75	4.50	1.750	0.500	1.25	7.125	6.00	1.500	0.375	1.45	0.63	1/4-20	0.28	3/32 sq x 5/8 lg
SC2RPS	16	1.000	9.00	3.938	1.750	3.25	5.50	2.125	0.500	1.25	8.312	6.00	2.125	0.625	1.76	1.00	1/4-20	0.28	3/16 sq x 1" lg
SC2RPS	20	1.250	11.00	5.125	2.125	4.00	6.50	2.500	0.750	1.50	10.000	6.00	2.375	0.625	1.76	1.00	5/16-18	0.34	3/16 sq x 1" lg
SC2RPS	24	1.500	13.00	5.750	2.500	4.75	8.00	3.000	0.750	1.50	12.000	8.00	2.875	0.875	2.31	1.50	5/16-18	0.34	1/4 sq x 1.62 lg
SC2RPS	32	2.000	18.00	7.375	3.250	6.00	10.00	3.750	1.000	1.75	15.875	8.00	3.875	0.875	2.31	1.50	3/8-16	0.41	1/4 sq x 1.62 lg

Dimensions in inches

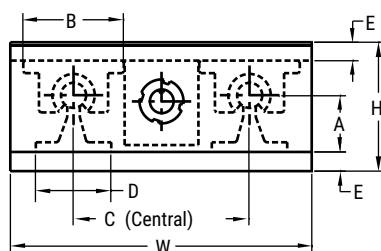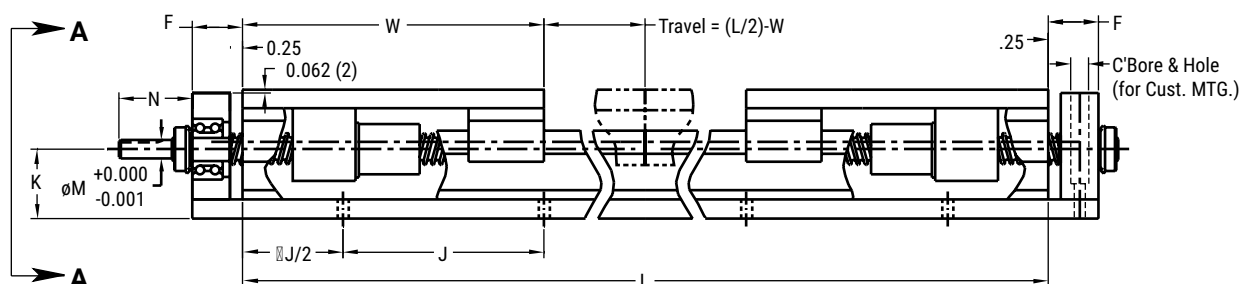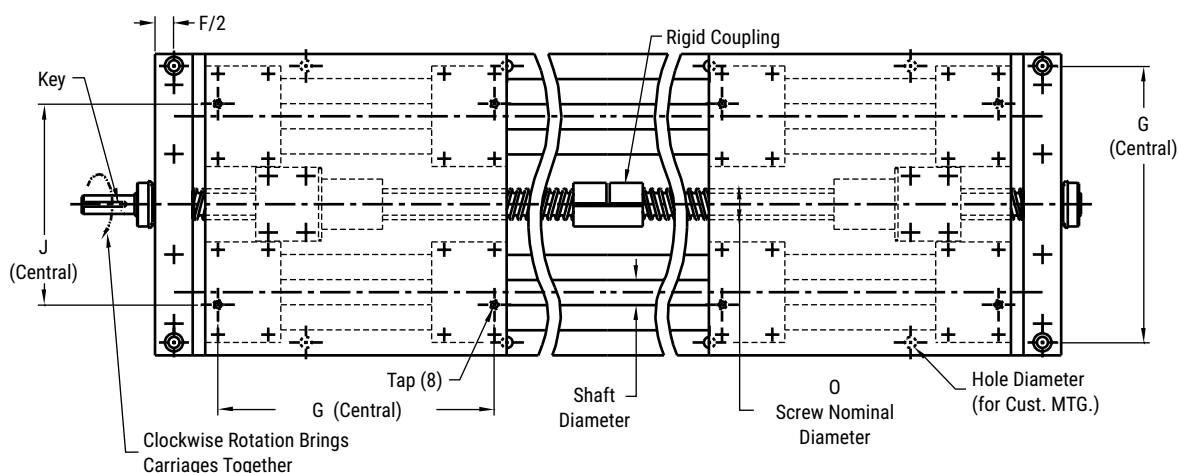

VIEW A - A

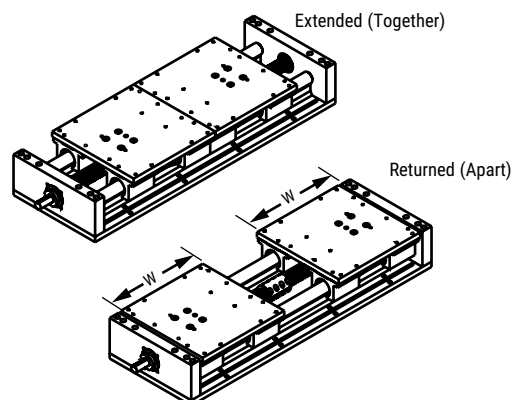


*Hole distance to each end is equal unless specified at time of order.

Simplicity® Linear Slides Handcrank & Wheel

Slide Assembly with Hand Crank & Ball Screw Rotational Lock 2HCR & 2HWL

Ordering Example:

To order a slide with a 0.625" diameter alloy steel linear shaft, 28" rail length, 0.200" right hand select ball screw and a hand wheel – specify part number, 2HWL-1000-028.000-AA7R.

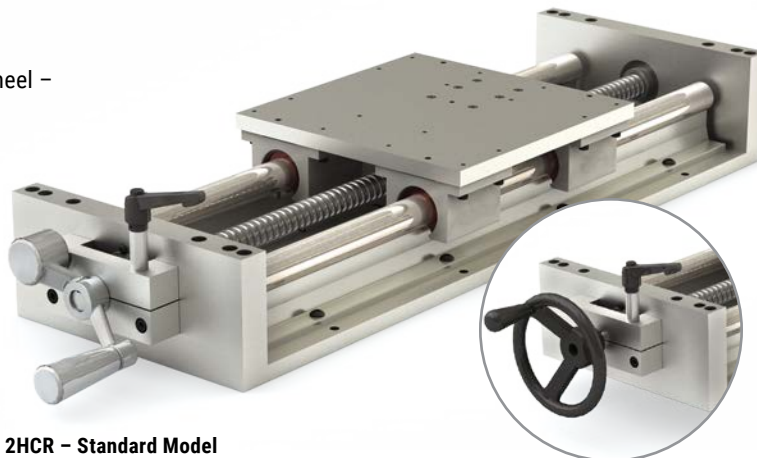

Part Number

Series	Size	L	Lead
2HXX X XXX - 08 XX - XXX.XXX - YYYY			
2HXX X XXX - 10 XX - XXX.XXX - YYYY			
2HXX X XXX - 12 XX - XXX.XXX - YYYY			
2HXX X XXX - 16 XX - XXX.XXX - YYYY			
2HXX X XXX - 20 XX - XXX.XXX - YYYY			
2HXX X XXX - 24 XX - XXX.XXX - YYYY			
2HXX X XXX - 32 XX - XXX.XXX - YYYY			

Substitute standard or select lead code from table for "YYYY"

Enter rail length in inches XXX.XXX (EX: 28" = 028.000)

Shafting material:

00 = Alloy Steel (Standard)

S3 = 316 Stainless Steel

S4 = 420 Stainless Steel

Note: Ball bearings not suitable with ceramic coated shafting.

CC = Ceramic Coated

SS = 440 Stainless Steel

Shaft diameter dimension in 1/16" increments

Internal Lubrication: **No Entry** = None (Standard)

JKM = Thru hole and internal felt wick

Bearing Type:

No Entry = Simplicity FrelonGOLD®

B = Ball Bearing

E = Simplicity Frelon® J

Handle Type:
(See table below)

CR = Standard Model

WL = Deluxe Model

Standard Lead Table

Accurate to less than 0.007" per foot accumulative

Size	Available Lead Codes					
08	AAXR	AAXL				
10	AAXR	AAXL				
12	AAXR	AAXL				
16			ABXR	ABXL	ACXR	ADXR
20			ABXR	ABXL	ACXR	ADXR
24			ABXR	ABXL	ACXR	ADXR
32			ABXR	ABXL	ACXR	ADXR

AAXR = 0.20 Right Hand

AAXL = 0.20 Left Hand

ABXR = 0.25 Right Hand

ABXL = 0.25 Left Hand

ACXR = 0.50 Right Hand

ADXR = 1.00 Right Hand

ADXL = 1.00 Left Hand

Note: Additional leads available upon request.

Select Lead Table

Accurate to less than 0.003" per foot accumulative

Size	Available Lead Codes					
08	AA7R	AA7L				
10	AA7R	AA7L				
12	AA7R	AA7L				
16			AB7R	AB7L	AC7R	AD7R
20			AB7R	AB7L	AC7R	AD7R
24			AB7R	AB7L	AC7R	AD7R
32			AB7R	AB7L	AC7R	AD7R

AA7R = 0.20 Right Hand

AA7L = 0.20 Left Hand

AB7R = 0.25 Right Hand

AB7L = 0.25 Left Hand

AC7R = 0.50 Right Hand

AD7R = 1.00 Right Hand

AD7L = 1.00 Left Hand

Note: Additional leads available upon request.

Standard Length Table

Size	Available Rail Lengths – L* (in inches)																			
08	008	012	016		020	024	028		032	036	040		044	048	052		056	060	064	
10	008	012	016		020	024	028		032	036	040		044	048	052		056	060	064	
12		012		018		024		030		036		042		048		054		060		066
16		012		018		024		030		036		042		048		054		060		066
20		012		018		024		030		036		042		048		054		060		066
24			016			024			032		040			048			056		064	
32						024			032		040			048			056		064	

*Contact factory for longer or non-standard lengths.

Simplicity® Linear Slides Handcrank & Wheel

INCH




ISO METRIC

JIS METRIC

DIMENSIONAL INFORMATION

Series	Size	Linear Shaft Dia.	W	H	A	B	C	D	E	F	G	J	K	O	P	Q	R	S	T	U	V	X	Y	Z	Tap	Hole Dia.
2HXX	08	0.500	6	2.562	1.125	2.00	3.5	1.500	0.375	0.75	5.500	4.00	1.375	0.631	2.56	3.85	3.00	0.875	1.312	4.00	4	4	2.655	4.855	10-24	0.22
2HXX	10	0.625	7	2.750	1.125	2.50	4.0	1.625	0.375	0.75	6.312	4.00	1.375	0.631	2.56	3.85	3.00	0.875	1.312	4.00	4	4	2.655	4.855	1/4-20	0.28
2HXX	12	0.750	8	3.438	1.500	2.75	4.5	1.750	0.500	1.00	7.125	6.00	1.500	0.631	2.56	3.85	3.00	0.875	1.312	4.00	4	4	2.655	4.855	1/4-20	0.28
2HXX	16	1.000	9	3.938	1.750	3.25	5.5	2.125	0.500	1.00	8.312	6.00	2.125	1.000	2.56	3.69	4.25	1.125	2.000	4.25	5	6	3.185	5.745	1/4-20	0.28
2HXX	20	1.250	11	5.125	2.125	4.00	6.5	2.500	0.750	1.25	10.000	6.00	2.375	1.000	2.56	3.69	4.25	1.125	2.000	4.25	5	6	3.185	5.745	5/16-18	0.34
2HXX	24	1.500	13	5.750	2.500	4.75	8.0	3.000	0.750	1.25	12.000	8.00	2.875	1.500	3.15	5.81	6.50	1.500	3.000	6.90	8	8	4.310	7.460	5/16-18	0.34
2HXX	32	2.000	18	7.375	3.250	6.00	10.0	3.750	1.000	1.50	15.875	8.00	3.875	1.500	3.15	5.81	6.50	1.500	3.000	6.90	8	8	4.310	7.460	3/8-16	0.41

Dimensions in inches

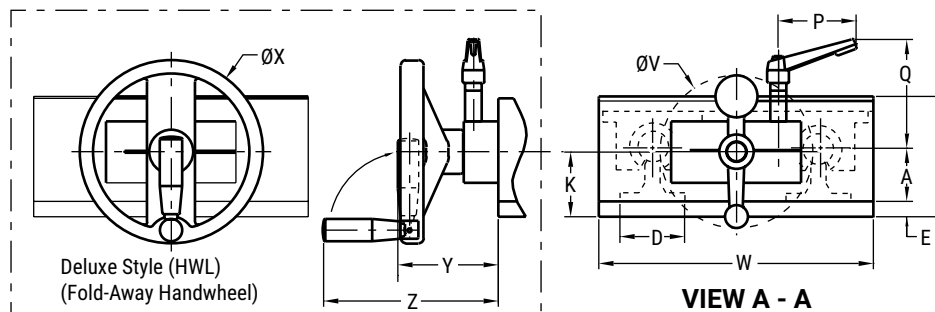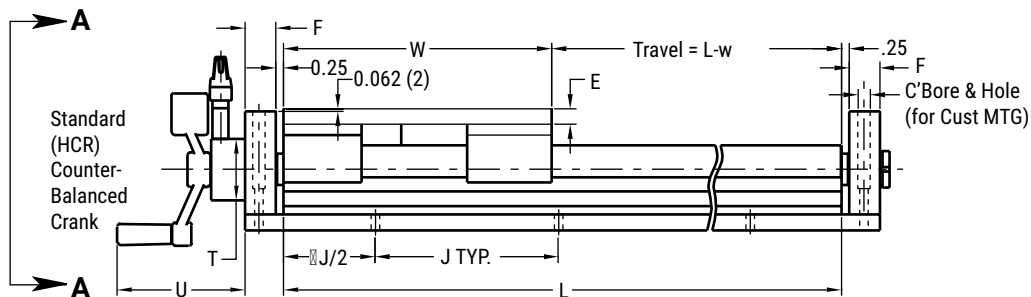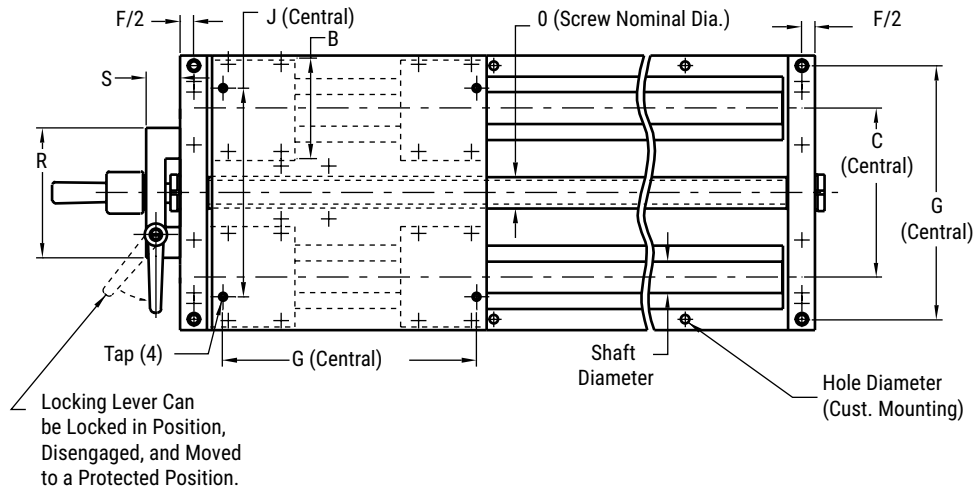

VIEW A - A


*Hole distance to each end is equal unless specified at time of order.

Simplicity® Linear Slides Nema Drive Kit

Slide Assembly & Nema Drive Kit 2N42, 56, 143


Ordering Example:

To order a slide with a 1" diameter alloy steel linear shaft, 28" rail length, 0.250" right hand select ball screw, and a NEMA 56 motor with a 0.625" shaft – specify part number, 2N56-1600-028.000-AB7R.

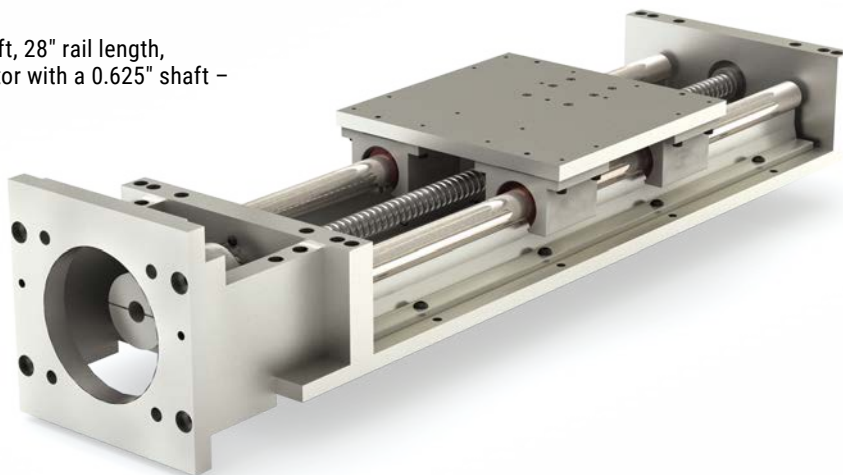

Part Number

Series	Size	L	Lead
2NXX	X XXX - 16 XX	XXX.XXX	YYYY
2NXX	X XXX - 20 XX	XXX.XXX	YYYY
2NXX	X XXX - 24 XX	XXX.XXX	YYYY
2NXX	X XXX - 32 XX	XXX.XXX	YYYY

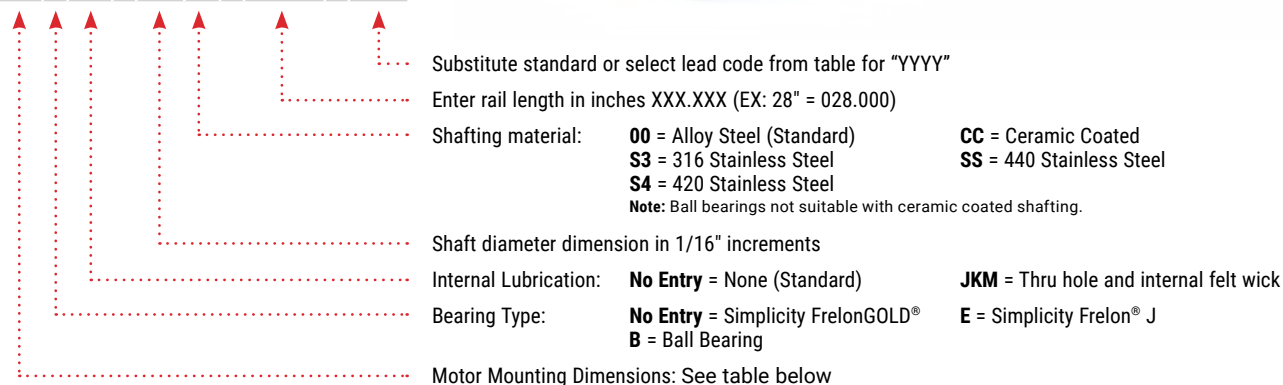

Standard Lead Table

Accurate to less than 0.007" per foot accumulative

Size	Available Lead Codes				
16	ABXR	ABXL	ACXR	ADXR	
20	ABXR	ABXL	ACXR	ADXR	
24	ABXR	ABXL	ACXR	ADXR	ADXL
32	ABXR	ABXL	ACXR	ADXR	ADXL

ABXR = 0.25 Right Hand
 ABXL = 0.25 Left Hand
 ACXR = 0.50 Right Hand
 ADXR = 1.00 Right Hand
 ADXL = 1.00 Left Hand

Note: Additional leads available upon request.

Select Lead Table

Accurate to less than 0.003" per foot accumulative

Size	Available Lead Codes				
16	AB7R	AB7L	AC7R	AD7R	
20	AB7R	AB7L	AC7R	AD7R	
24	AB7R	AB7L	AC7R	AD7R	AD7L
32	AB7R	AB7L	AC7R	AD7R	AD7L

AB7R = 0.25 Right Hand
 AB7L = 0.25 Left Hand
 AC7R = 0.50 Right Hand
 AD7R = 1.00 Right Hand
 AD7L = 1.00 Left Hand

Note: Additional leads available upon request.

Motor Mounting Dimensions

Coupling MAX* Torque Dynamic Capacity = 200 in.-lb.

Size	Drive	R	S	V	X	Y	Z
42A	NEMA 42	3.000	0.375	5.000	0.28	3.750	2.652
42B	NEMA 42	2.188	0.625	5.000	5/16-18	4.950	3.500
56	NEMA 56	4.500	0.625	7.000	0.41	5.875	4.154
143	NEMA 143/145	4.500	0.875	7.000	0.41	5.875	4.154

Note: Contact factory for international drives and low profile slide assembly availability.

*Due to ball screw and nut life/torque capacities for 16 and 20 size slides, do not exceed 100 in.-lb. of input torque without consulting factory.

Standard Length Table

Size	Available Rail Lengths – L** (in inches)										
16	012	018	024	030	036	042	048	054	060	066	072
20	012	018	024	030	036	042	048	054	060	066	072
24	016	024	032	040	048	056	064	072	080	088	096
32		024	032	040	048	056	064	072	080	088	096





**Contact factory for longer or non-standard lengths.

Simplicity® Linear Slides Nema Drive Kit

DIMENSIONAL INFORMATION

Series	Size	Linear Shaft Dia.	W	H	A	B	C	D	E	F	G	J	K	M	N	O	Q	Tap	Hole Dia.
2NXX	16	1.00	9.00	3.938	1.750	3.25	5.50	2.12	0.50	1.00	8.312	6.00	2.125	0.625	1.76	1.00	3.00	1/4-20	0.28
2NXX	20	1.25	11.00	5.125	2.125	4.00	6.50	2.50	0.75	1.25	10.000	6.00	2.375	0.625	1.76	1.00	3.00	5/16-18	0.34
2NXX	24	1.50	13.00	5.750	2.500	4.75	8.00	3.00	0.75	1.25	12.000	8.00	2.875	0.875	2.31	1.50	2.62	5/16-18	0.34
2NXX	32	2.00	18.00	7.375	3.250	6.00	10.00	3.75	1.00	1.75	15.875	8.00	3.875	0.875	2.31	1.50	2.62	3/8-16	0.41

Dimensions in inches

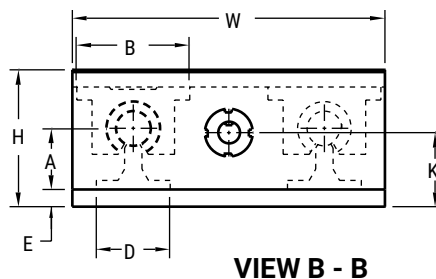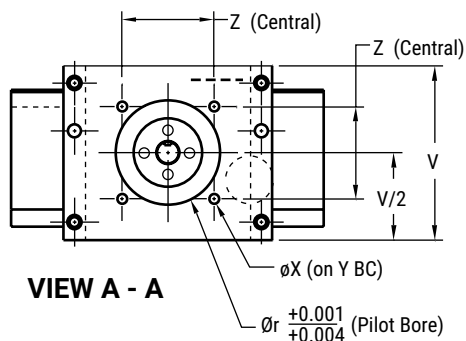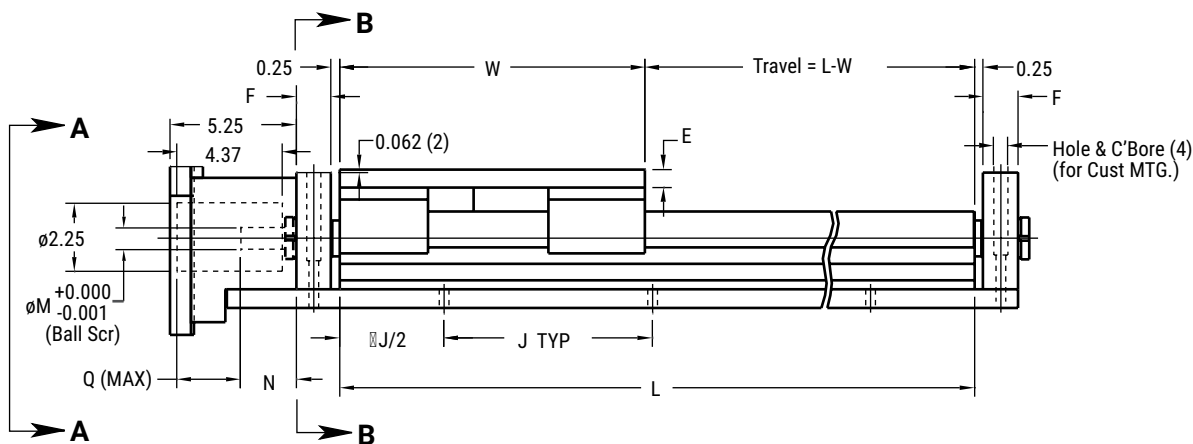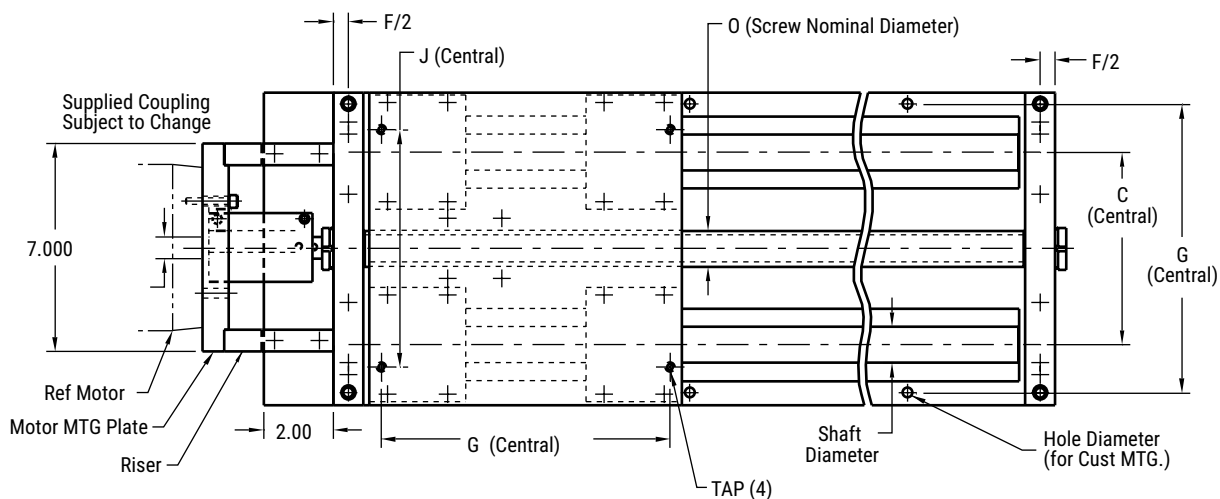


*Hole distance to each end is equal unless specified at time of order.

Simplicity® Linear Slides Nema Drive Kit

Slide Assembly & NEMA Drive Kit 2N23 & 2N34

Ordering Example:

To order a slide with a 0.625" diameter alloy steel linear shaft, 28" rail length, 0.200" right hand select ball screw, and a NEMA 23 motor with a 0.250" shaft – specify part number, 2N23A-1000-028.000-AA7R.

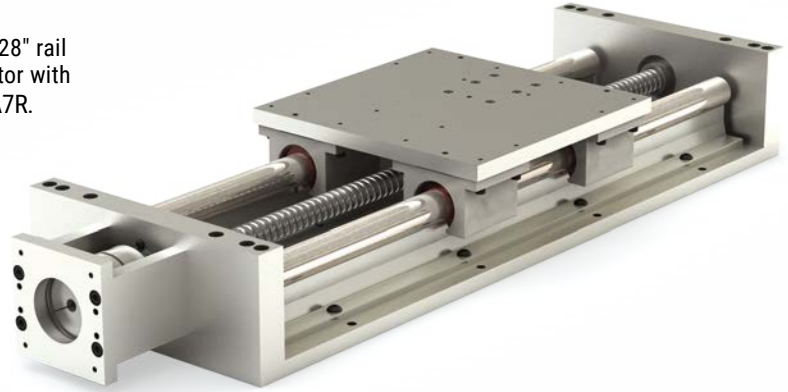

Part Number

Series	Size	L	Lead
2NXX	X XXX - 08 XX - XXX.XXX - YYYY		
2NXX	X XXX - 10 XX - XXX.XXX - YYYY		
2NXX	X XXX - 12 XX - XXX.XXX - YYYY		
2NXX	X XXX - 16 XX - XXX.XXX - YYYY		
2NXX	X XXX - 20 XX - XXX.XXX - YYYY		

Substitute standard or select lead code from table for "YYYY"

Enter rail length in inches XXX.XXX (EX: 28" = 028.000)

Shafting material: **00** = Alloy Steel (Standard) **CC** = Ceramic Coated
S3 = 316 Stainless Steel **SS** = 440 Stainless Steel
S4 = 420 Stainless Steel
Note: Ball bearings not suitable with ceramic coated shafting.

Shaft diameter dimension in 1/16" increments

Internal Lubrication: **No Entry** = None (Standard) **JKM** = Thru hole and internal felt wick

Bearing Type: **No Entry** = Simplicity FrelonGOLD® **E** = Simplicity Frelon® J
B = Ball Bearing

Motor Mounting Dimensions: See table below

Standard Lead Table

Accurate to less than 0.007" per foot accumulative

Size	Available Lead Codes					
08	AAXR	AAXL				
10	AAXR	AAXL				
12	AAXR	AAXL				
16			ABXR	ABXL	ACXR	ADXR
20			ABXR	ABXL	ACXR	ADXR

AAXR = 0.20 Right Hand
AAXL = 0.20 Left Hand
ABXR = 0.25 Right Hand
ABXL = 0.25 Left Hand
ACXR = 0.50 Right Hand
ADXR = 1.00 Right Hand

Note: Additional leads available upon request.

Select Lead Table

Accurate to less than 0.003" per foot accumulative

Size	Available Lead Codes					
08	AA7R	AA7L				
10	AA7R	AA7L				
12	AA7R	AA7L				
16			AB7R	AB7L	AC7R	AD7R
20			AB7R	AB7L	AC7R	AD7R

AA7R = 0.20 Right Hand
AA7L = 0.20 Left Hand
AB7R = 0.25 Right Hand
AB7L = 0.25 Left Hand
AC7R = 0.50 Right Hand
AD7R = 1.00 Right Hand

Note: Additional leads available upon request.

Motor Mounting Dimensions

Coupling MAX* Torque Dynamic Capacity = 50 in.-lb.

Size	Drive	R	S	V	X	Y	Z
23A	NEMA 23	1.502	0.250	2.500	10-32	2.625	1.856
23B	NEMA 23	1.502	0.375	2.500	10-32	2.625	1.856
34A	NEMA 34	2.875	0.375	3.500	10-32	3.875	2.740
34B	NEMA 34	2.875	0.500	3.500	10-32	3.875	2.740

Note: Contact factory for international drives and low profile slide assembly availability.

*Due to ball screw and nut life/torque capacities for 08, 10, or 12 size slides, do not exceed 30 in.-lb. of input torque without consulting factory.

Standard Length Table

Size	Available Rail Lengths – L** (in inches)																													
08	008	012	016		020	024	028		032	036	040		044	048	052		056	060	064		068	072	076		080	084	088		092	096
10	008	012	016		020	024	028		032	036	040		044	048	052		056	060	064		068	072	076		080	084	088		092	096
12		012		018		024		030		036		042		048		054		060		066		072		078		084		090		096
16		012		018		024		030		036		042		048		054		060		066		072		078		084		090		096
20		012		018		024		030		036		042		048		054		060		066		072		078		084		090		096





**Contact factory for longer or non-standard lengths.

Simplicity® Linear Slides Nema Drive Kit

DIMENSIONAL INFORMATION

Series	Size	Linear Shaft Dia.	W	H	A	B	C	D	E	F	G	J	K	M	N	O	Q	Tap	Hole Dia.
2NXX	08	0.500	6.00	2.562	1.125	2.00	3.50	1.500	0.375	0.75	5.500	4.00	1.375	0.375	1.45	0.631	1.31	10-24	0.22
2NXX	10	0.625	7.00	2.750	1.125	2.50	4.00	1.625	0.375	0.75	6.312	4.00	1.375	0.375	1.45	0.631	1.31	1/4-20	0.28
2NXX	12	0.750	8.00	3.438	1.500	2.75	4.50	1.750	0.500	1.00	7.125	6.00	1.500	0.375	1.45	0.631	1.31	1/4-20	0.28
2NXX	16	1.000	9.00	3.938	1.750	3.25	5.50	2.125	0.500	1.00	8.312	6.00	2.125	0.625	1.76	1.000	1.19	1/4-20	0.28
2NXX	20	1.250	11.00	5.125	2.125	4.00	6.50	2.500	0.750	1.25	10.000	6.00	2.375	0.625	1.76	1.000	1.19	5/16-18	0.34

Dimensions in inches

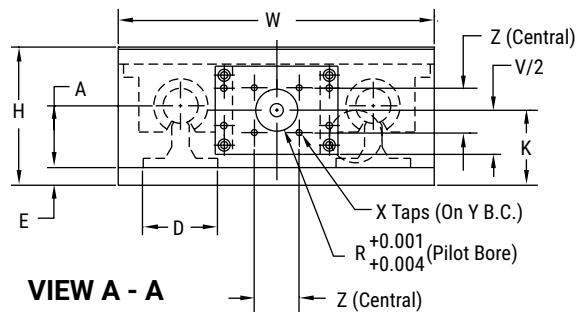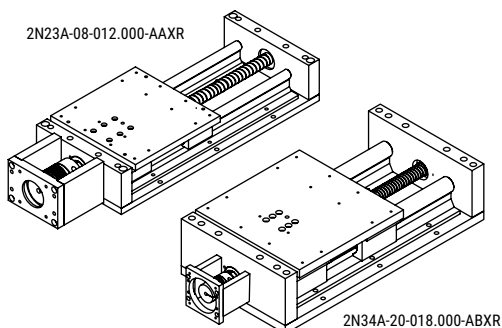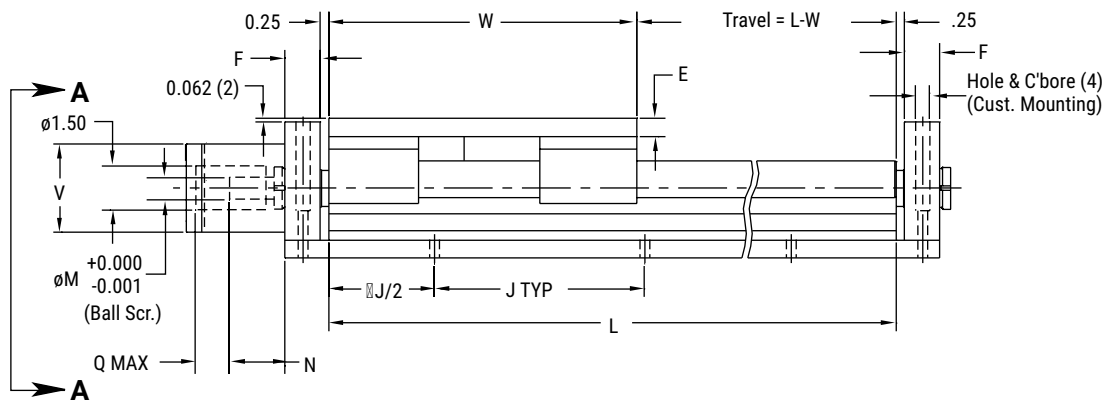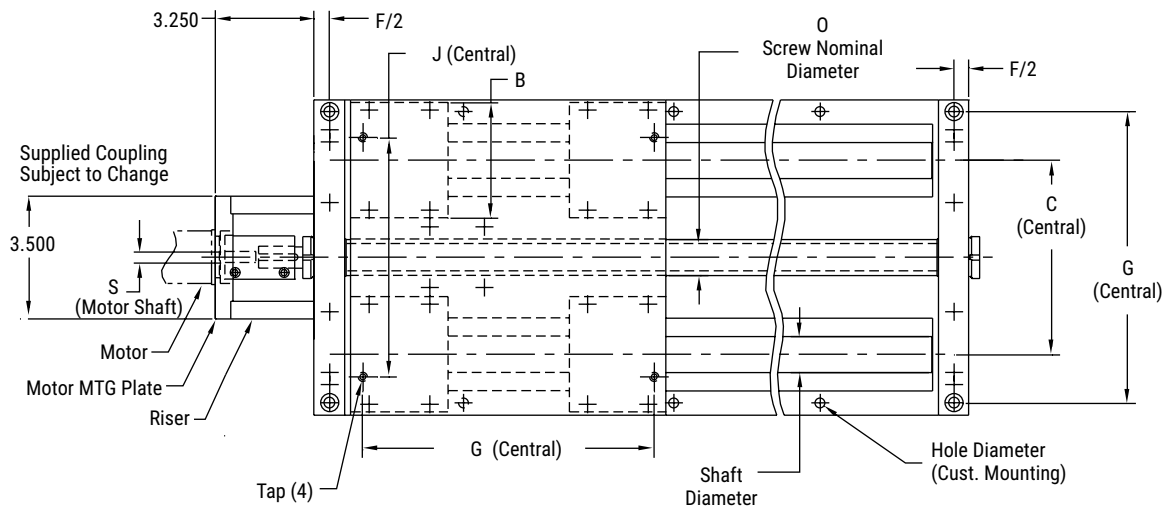

*Hole distance to each end is equal unless specified at time of order.

Simplicity[®] Linear Slides

Slide Selection Information


1. Determine the size and stroke of slide
2. Is a lube system required?
3. Please furnish the following to the factory:
 - a. Model designation
 - b. Lube system requirements
 - c. Mounting orientation, saddle position if mounted at an angle
 - d. Load to be carried and approximate center of gravity from saddle center
 - e. Location and magnitude of any force which resists the motion of the slide
 - f. Acceleration rate and maximum velocity of the saddle
 - g. Deceleration rate
 - h. Service life requirements
 - i. Type of environment the slide will operate in

Model Number

Series Code Size Code Length Code Ball Screw Lead Code

Mounting Orientation


Please indicate the parameters of your application in the boxes below:

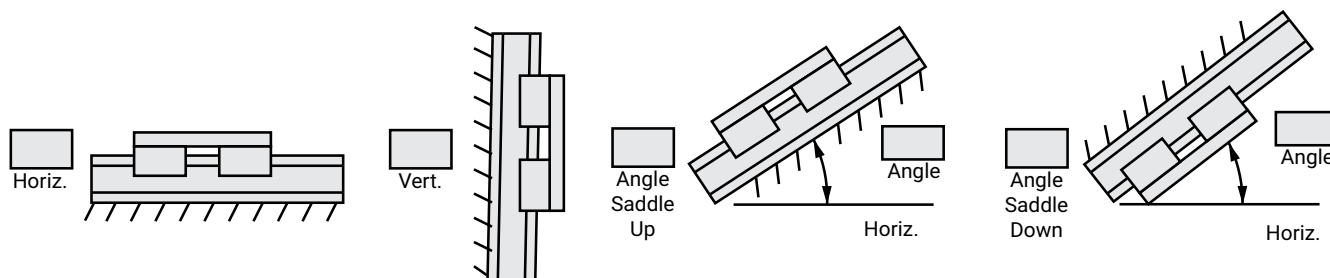

Cycle Rate:		Per Hour:		Per Minute:	
MAX Saddle Velocity:		Inch/Second:			
Acceleration Rate:		Inches/Second ² :			
Deceleration Rate:		Inches/Second ² :			
Load:		lbs.			

Location of Center of Gravity from Saddle Center

Please indicate the parameters of your application in the boxes below:

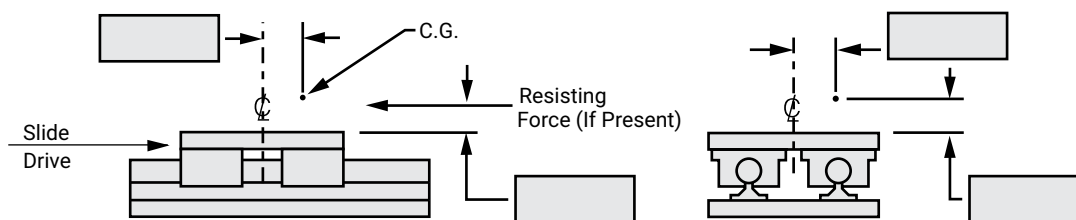


Note: Example of "Resisting Force" would be tool thrust for a drill head mounted on slide.

Resisting Force:		lbs.
Life Requirement:		Strokes: Hours

Simplicity® Linear Slides Load Capacities


The safe loading recommendations shown apply to plain bearing, non-lubricated slide applications. All slides are to be fully supported and rigidly mounted. **Load capacities shown reflect the use of Simplicity linear plain bearings.** Contact PBC Linear for load capacities for linear slides with ball bearings.

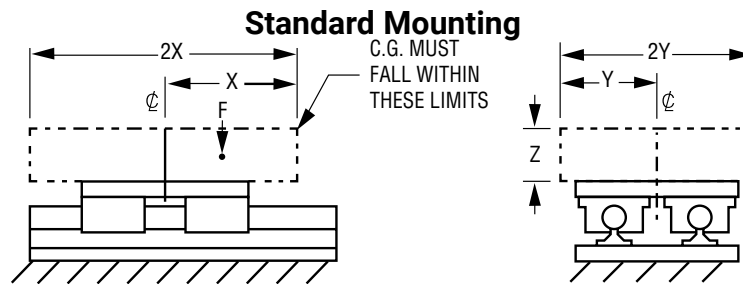

RECOMMENDED SAFE LOADING

Size	F MAX lb.	F MAX N	X in.	Y in.	Z in.
08	1450	6450	4.00	2.37	3.00
10	2200	9786	4.75	2.76	3.50
12	2850	12677	5.00	2.85	4.00
16	5275	23464	5.50	3.37	4.50
20	7750	34473	6.75	4.05	5.50
24	10600	47151	7.86	4.90	6.50
32	18750	83400	10.75	6.00	9.00

Note: Load ratings apply to Simplicity plain bearings only.

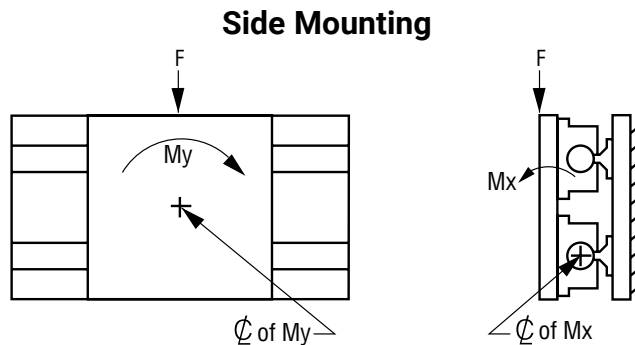

RECOMMENDED SAFE LOADING

Size	F MAX lb.	My in.-lb.	Mx in.-lb.	F Max N	My nm	Mx nm
08	540	910	1500	2402	103	169
10	760	1680	2750	3381	190	311
12	840	1710	2875	3737	193	325
16	1050	3300	4430	4671	373	501
20	1750	6175	8750	7784	698	989
24	2100	9600	12600	9341	1085	1424
32	3300	19000	28050	14679	2147	3169

Note: Load ratings apply to Simplicity plain bearings only.


Simplicity® Linear Slides Load Capacities

INCH

ISO METRIC

JIS METRIC

Inverted Mounting

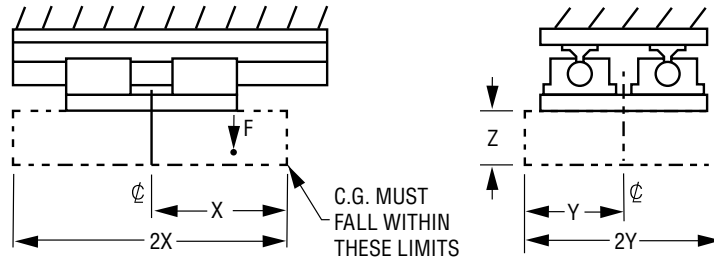


RECOMMENDED SAFE LOADING

Size	F MAX lb.	F MAX N	X in.	Y in.	Z in.
08	195	867	4.85	2.91	3.00
10	285	1268	5.69	3.33	3.50
12	315	1401	6.52	3.75	4.00
16	450	2002	7.31	4.58	4.50
20	712	3167	8.84	5.42	5.50
24	900	4003	10.50	6.67	6.50
32	1425	6339	14.67	8.33	9.00

Note: Load ratings apply to Simplicity plain bearings only.

Vertical Mounting

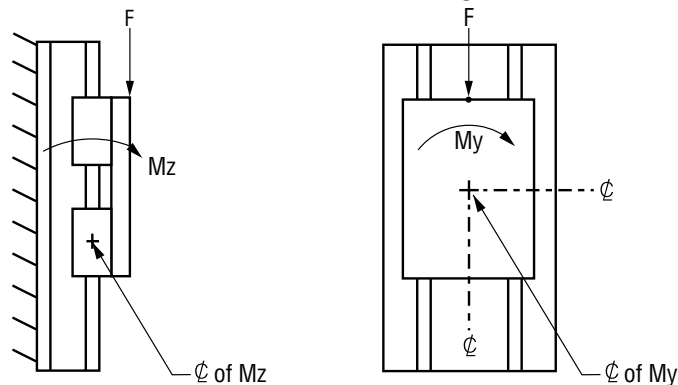

RECOMMENDED SAFE LOADING

Size	F MAX ^{1,2} lb.	My in.-lb.	Mz in.-lb.	F MAX N	My nm	Mz nm
08	260	1445	1500	1157	163	169
10	300	2750	2750	1334	311	311
12	300	2875	2875	1334	325	325
16	600	5000	4430	2669	565	501
20	675	9500	8750	3003	1073	989
24	710	14400	12600	3158	1627	1424
32	900	32300	28050	4003	3649	3169

Note: Load ratings apply to Simplicity plain bearings only. ¹ Applies only when using 2RPS and 2LRPS slides. ² If "F" is exceeded consult factory. For RPS, FMAX is dependent upon customer's method of moving the slide.

Simplicity® Linear Slides Column Load Chart

INCH

ISO METRIC

JIS METRIC

Compression (Column) Load

Compression-column load is a load that tends to buckle or compress the screw shaft.

How To Use Chart:

1. Determine maximum compression load (lb.)
2. Determine slide length. ("L" dimension)
3. Determine end fixity and slide designation (2RPS and 2LRPS)
4. Find the point at which load and length intersect
5. Select a slide above or to the right of the intersecting point

Note: Applies primarily to vertical applications.

Column Load Formulas:

$$P_C = C_C \cdot 14.03 \times 10^6 \cdot \left(\frac{D^4}{L^2} \right)$$

P_C = Critical column load (lb.)

D = Root diameter of screw (in.) (See chart)

L = Slide length (in.)




C_C = End fixity factor

C_C = .25 for 1RPS

C_C = 2.0 for 2RPS and 2LRPS

Note: Chart figures at 80% of actual load. Do not exceed these figures.

Curve #	Slide Series		Lead	D (in.)
1	1 & 2RPS-08	2LRPS-08	AAxx	.500
	1 & 2RPS-10	2LRPS-10		
	1 & 2RPS-12	2LRPS-12		
2	1 & 2RPS-16	2LRPS-16	ABxx	.840
	1 & 2RPS-20	2LRPS-20		
	1 & 2RPS-16	2LRPS-16	ADxx	
	1 & 2RPS-20	2LRPS-20		
	1 & 2RPS-16	2LRPS-16	ACxx	.870
	1 & 2RPS-20	2LRPS-20		
3	1 & 2RPS-24	2LRPS-24	ADxx	1.140
	1 & 2RPS-32-	2LRPS-32		
4	1 & 2RPS-24	2LRPS-24	ACxx	1.260
	1 & 2RPS-32	2LRPS-32		
5	1 & 2RPS-24	2LRPS-24	ABxx	1.375
	1 & 2RPS-32	2LRPS-32		

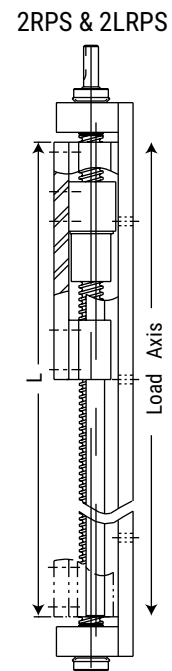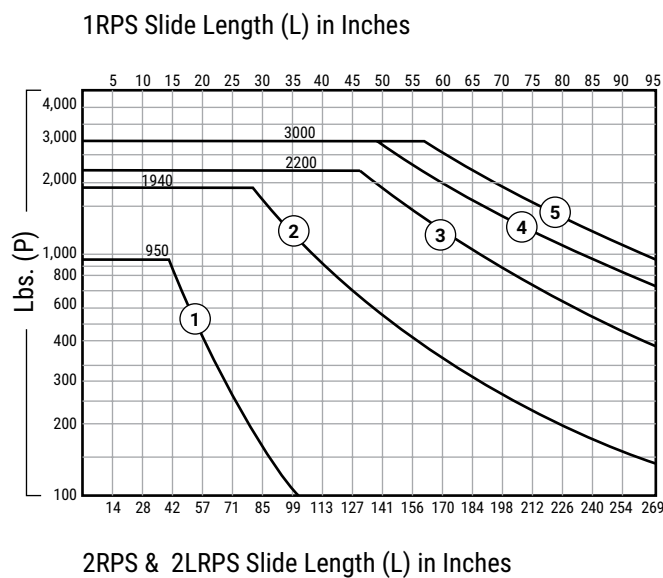

Simplicity® Linear Slides Critical Speed Chart

Critical Speed

The maximum speed at which a ball screw or ball nut can rotate without producing destructive resonant vibrations. The critical speed is a function of the ball screw diameter, the unsupported length of the screw, rigidity of the bearing supports, and RPM.

How To Use Chart:

1. Determine end fixity. How many ends are fixed? (Slide designation, 2RPS and 2LRPS)
2. Determine slide length. ("L" dimension)
3. Find the length – fixity vertical line, read up to find the intersecting, at the required travel rate
4. Select a slide above or to the right of the intersection point
5. Higher speeds and/or longer lengths are available as cost effective specials, having a larger ball screw and bearings

Critical Speed Formulas:

$$N = C_s \cdot 7.93 \times 10^4 \cdot \left(\frac{DH}{L^2} \right)$$

N = Critical speed (MAX) (expressed in in./sec.)

D = Root diameter of screw (See chart)

H = Lead of screw (in.) (See chart)

L = Slide length (in.)



C_s = End fixity factor

C_s = 0.36 for 1RPS

C_s = 1.47 for 2RPS and 2LRPS

Note: Chart figures at 80% of actual load. Do not exceed these figures.

Curve #	Slide Series		Lead	D (in.)	H (in.)
1	1 & 2RPS-08	2LRPS-08	AAxx	0.500	0.200
	1 & 2RPS-10	2LRPS-10			
	1 & 2RPS-12	2LRPS-12			
2	1 & 2RPS-16	2LRPS-16	ABxx	0.840	0.250
	1 & 2RPS-20	2LRPS-20			
3	1 & 2RPS-24	2LRPS-24	ABxx	1.375	0.250
	1 & 2RPS-32	2LRPS-32			
4	1 & 2RPS-16	2LRPS-16	ACxx	0.870	0.500
	1 & 2RPS-20	2LRPS-20			
5	1 & 2RPS-24	2LRPS-24	ACxx	1.260	0.500
	1 & 2RPS-32	2LRPS-32			
6	1 & 2RPS-16	2LRPS-16	ADxx	.840	1.000
	1 & 2RPS-20	2LRPS-20			
7	1 & 2RPS-24	2LRPS-24	ADxx	1.140	1.000
	1 & 2RPS-32	2LRPS-32			

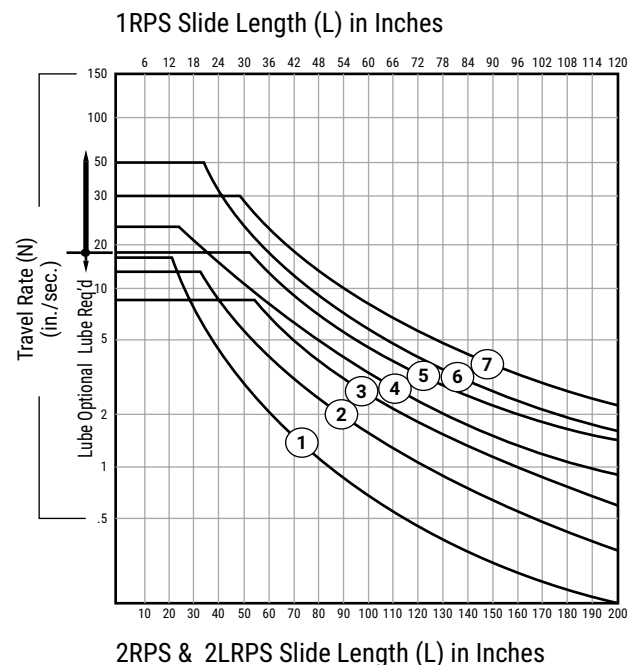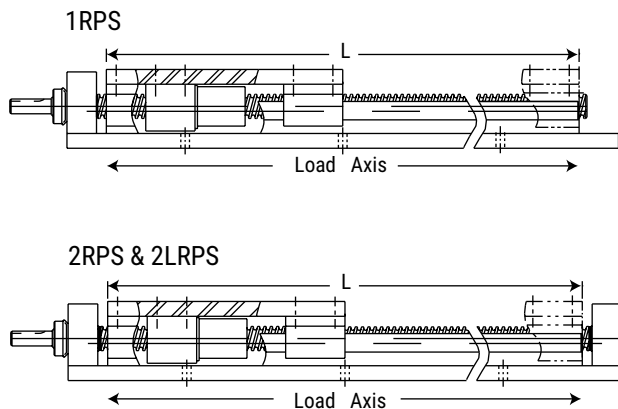

Round Shaft Technology Technical

Table of Contents

Simplicity® & EconoGlide™ Linear Plain Bearings

Ratings for Plain Bearings	146
Types & Effects of Lubrication	147
Load Capacity	148
Wear Rate	149
Coefficient of Friction	150
Cantilevered Loads	151
Shaft Deflection	153
Installation	155
Chemical Reaction Chart	159

Linear Ball Bearings

Load Rating	160
Life expectancy & Calculations	161
Clearance & Mounting	163

Roller Pillow Block Bearings

Load & Sizing	165
Adjustments & Curves	166
Cross Reference Guide.	167



Email an Application Engineer



Ratings Plain Bearings

Classes of Plain Bearings

Simplicity bearings are in a class of bearings known as Plain bearings, which means that they have no rolling elements. There are three classes of Plain bearings:

- Class I** – Require an outside source of lubrication (oil, grease, etc.).
- Class II** – Lubrication is impregnated within the walls of the bearing. (Bronze, powder metal, etc.) Typically, these bearings require an added lubricant also.
- Class III** – Self-lubricating bearings, which do not require added lubricants.

Simplicity and EconoGlide bearings are Class III Plain bearings and are self-lubricating.

Rating a Plain Bearing

Plain bearing performance capacity is rated by PV.

P = Pressure or load in pounds per square inch (psi) or kilograms per square centimeter (kg/cm²).

V = Velocity or surface speed in feet per minute (fpm or sfm) or meters per minute (m/min.).

PV = Pressure velocity value (Pressure x Velocity).


Simplicity Maximum Parameters

Maximum Parameters	P	V Running Dry	PV
Frelon® J	1,500 psi or 105.45 kgf/cm ²	140 sfm or 42.67 m/min.	10,000 psi x ft./min. or 215 kgf/cm ² x m/min.
FrelonGOLD®	3,000 psi or 210.9 kgf/cm ²	300 sfm or 91.44 m/min.	20,000 psi x ft./min. or 430 kgf/cm ² x m/min.
Frelon IM	2,030 psi or 142.76 kgf/cm ²	98 sfm or 30 m/min.(Sustained)	11,420 psi x ft./min. or 245 kgf/cm ² x m/min.

Note: All three parameters must be met by an application for the bearing to perform properly.

PV equivalents

	Inch	Technical Metric	Int'l Metric (SI)
Load	1 psi	0.0703 kgf/cm ²	0.0069 N/mm ²
Velocity	1 ft./min.	0.3048 m/min.	0.00508 m/sec.
PV	1 PV	0.0214 PV	0.000036 PV
FrelonGOLD MAX PV	20,000	430	0.72
Frelon J MAX PV	10,000	215	0.36

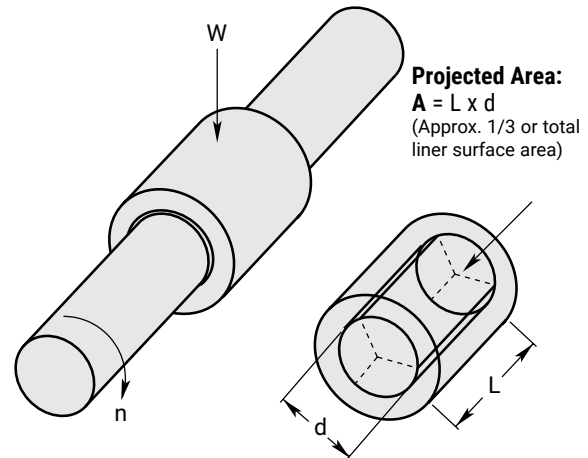

W = MAX load

L = bearing length

d = shaft diameter

A = projected contact area

n = rotational speed (rpm)

Formulas for Ratings

Pressure is over the projected area of load:

$$A = L \cdot d$$

$$P = \frac{W}{A} \text{ psi (or kg/cm}^2\text{)}$$

Velocity:

Linear = total distance traveled in one minute

Rotational Velocity:

$$V = \frac{\pi \cdot d \cdot n}{12} \text{ fpm (or m/min.)}$$

Pressure velocity value (PV):

$$PV = P \cdot V \text{ psi} \cdot \text{fpm (or kg/cm}^2 \cdot \text{m/min.)}$$

Oscillating Velocity:

C = frequency and θ = Oscillating angle

$$V = \frac{\pi \cdot d \cdot C \cdot \theta}{1,000 \cdot 360 \cdot 60}$$

Linear Velocity:

S = stroke (m) and **C** = frequency

$$V = \frac{2s \cdot C}{60}$$

Types & Effects of Lubrication Plain Bearings

Types and Effects of Lubrication

Lubrication is any outside technique used for reducing the friction, wear, or both of a bearing. **Proper lubrication of Simplicity bearings is critical.** Evaluate lubrication needs on an application-by-application basis to determine whether or not it should be used at all, what type is needed, and how it is applied. Below are some criteria on which to base the lubricant decision:

Do not use WD40™, PTFE sprays, or other oils, greases, or sprays that contain fluorocarbons or silicone. In testing, these lubricants have proven to cause long-term stick-slip problems with the Frelon lined bearings. They tend to become a gummy substance that ultimately increases friction.

WD40™ is a registered trademark of the WD40 Corporation.

Recommended Lubricants:

- Waylube oils
- Lightweight oils
- 3-in-1 type oils
- Lightweight petroleum based greases

Using Oils with Simplicity

DO NOT USE ANY TYPE OF MOTOR OIL OR OILS WITH ADDITIVES!

These types of oils work well short term, but quickly become ineffective, and will cause stick-slip reactions in the bearing. As a rule of thumb, the less additives in the oil, the better the performance. Recommended oils are Mobil Vactra #2 (a way lube oil) and any standard 3-in-1 oil. The 3-in-1 oils are tremendous cleaning oils and are the best in preparing for a proper transfer of PTFE to the shafting.

Grease Products

DO NOT USE A MOLY FILLED OR OTHER TYPE FILLED GREASES! They become like a lapping compound on the ID of the bearing and increase wear dramatically.

Proper Use of Greases

Proper use of grease is critical for trouble-free operation.

Be sure the felt wick is removed from a “FL-xx-JKM” bearing because grease inserted through the zerk will cause the wick to act like a brake.

Do not fill all of the running clearance with grease!

The temptation is to treat it like a rolling element bearing and fill it until it weeps from the end. This will cause greater friction and binding.

The rule of thumb for the bearing liner that “thin is better” applies to the use of grease also.

If grease is used and does not work in the application, it is possible to salvage the bearing with minimal work and to continue to operate. Follow the steps below:

1. If possible, remove the bearing from the housing, wipe the grease from the liner, use a 3-in-1 type oil to clean the excess remaining grease, and reinstall.
2. If it is not possible to remove the bearing, wipe as much grease as possible away from the ends of the bearing, then start to fill with a 3-in-1 type oil for cleaning the liner. To speed the cleaning process, apply forced air to the bearing through the zerk hole and continue using oil lubrication.

Effects of Lubrication

Lubrication can greatly increase the performance of a bearing when applied properly as noted earlier. Actual performance results for specific applications are difficult to predict due to the number of elements involved (temperature change with lube, useable life, or aging of lubricant, etc.). Specific application testing is recommended to establish specific performance parameters.

Load Capacity Plain Bearings

Load Capacity (Pressure)

Depending upon the material used, a plain bearing's load capacity can greatly exceed a rolling element bearing. There are three basic reasons for this:

1. The area of surface contact with the shaft is far greater than rolling element bearings, which have point-to-point contact with a given number of balls.
2. A rolling element bearing must be oriented properly for the ball tracks to carry the load adequately, while a Plain bearing can be mounted in any orientation.
3. Only one or two of the tracks in a rolling element bearing will actually carry any of the load applied.

Simplicity bearings have a thin liner that is bonded to a metal shell at the molecular level, allowing the load to be transferred throughout the bearing. This gives it an advantage over other Plain bearings of solid plastic or polymer materials. These other materials will tend to "cold flow" under pressure. "Cold flow" means to deform or lose shape. The idea is similar to pressing your finger into a bar of soap – material will move or deform as pressure is applied.

Linear Surface Speeds (Velocity)

In typical applications, speed is a known quantity and easily converted. Typically feet per minute or meters per minute are used. The most important factor that speed (along with friction) produces is heat buildup. This is not a critical factor in most linear applications because the heat is dissipated over the length of travel, and it does not affect the bearing. Short stroke or extremely high speed applications may see the effects of heat buildup in thermal expansion and the bearing ID locking on the shaft. A compensated ID bearing (FLC) is recommended in these applications.

Factors that Contribute to Wear Life

Plain bearings are rated by the wear rate of the bearing material. Wear is greatly dependent upon the proper application of the bearing and material used.

- Proper mating of shaft and liner materials.
- Surface finish 8-16 Ra (.20-.40 mm) is required. Peaks in the surface that are polished to a radius provide the best running surface. Sharp peaks in the finish will be like a fine lapping compound wearing the I.D. of the bearing.

Note: Shafting damaged by use with ball bearings can be salvaged and used with Simplicity bearings. Spin in a lathe and polish with sand papers in this order: 120 grit, 180 grit, and 300 grit. This will also remove sharp peaks in the surface finish.

- **Surface speed** - at high speeds, heat buildup will affect liner wear.
- **Break-in transfer** - proper transfer process of the liner to the shaft.
- **Lubrication** - proper lubrication can greatly improve the wear rate of a bearing. At the same time, improper lubrication can increase wear and failure.
- **Load & Wear Relationship** - wear rate is proportional to load to the third power: wear rate $\propto (\text{load})^3$.
If load is reduced to $1/2$, wear will be reduced to $(1/2)^3$.
- **Contamination** - while migrating into the bearing and embedding into the liner, certain types of contamination may, over time, cause increased wear to the liner.

Note: This is not an all inclusive list. There are many more factors within an application that can affect wear to different degrees. These are the major issues and the first things to address in a design.

Wear Rate Simplicity® Plain Bearings

Wear Rate vs. Life Expectancy


A rolling element linear bearing's life expectancy is usually expressed in total inches or meters. A rolling element rotary bearing's life expectancy is expressed in hours of operation. Both are also rated for average (L-50) and minimum (L-10) life. L-50 life is the average life that can be expected from 50% of rolling element bearings. In other words, 50% will not reach the average life expectancy. L-10 life is the minimum life (1/5 the average life) expected from 90% of rolling element bearings. In other words, 10% will not reach the minimum life expectancy. Theoretically they could fail upon installation.

Plain bearings are not rated by a life expectancy but by the wear rate of the bearing material. Wear is greatly dependent upon the proper application of the bearing and material used. If it is not properly applied, it will fail. Failure, however, is subjective and dependent upon

specific application requirements. 0.002" running clearance may not be acceptable in one application while another may be able to run a bearing until the liner is completely worn through. The user may then rotate it 30 degrees and continue to run it. This broad range of acceptability makes it difficult to determine life expectancy.

The first step is to determine what wear is acceptable for your application. Then utilizing the test data below, you can estimate the wear expected for your given application.

Wear Test Sample

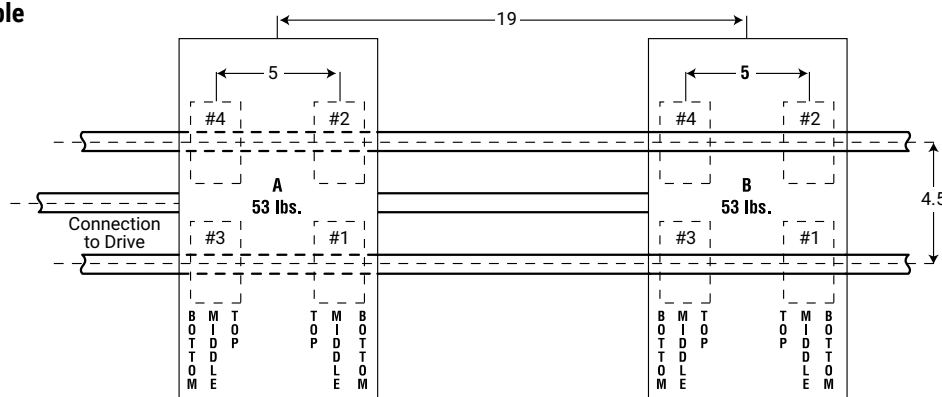

Conducted by: Pacific Bearing® Company

Bearing Material: FrelonGOLD®

Shaft Material: Standard RC60 steel shafting

Surface Finish: 8-12 Ra

Speed: 140 fpm (70 cycles/min.; 1,680"/min.;
100,800"/hour; 2,419,200"/day)

Stroke: 12"

Load: 10.87 psi (53 lb.)


Bearings Used: FLN12 (3/4" open style bearings)

Lubrication: None

Total Wear to Bearing Material: FrelonGOLD = 0.00042"

Note: Wear is an average of totals taken from 4 bearings per carriage.

FrelonGOLD® Linear Wear Test

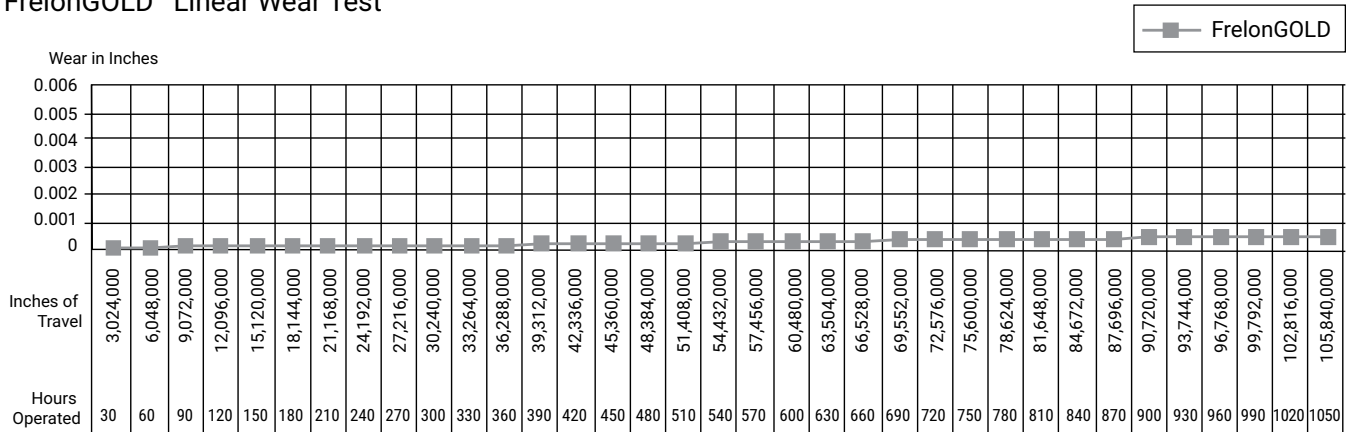


Coefficient of Friction Plain Bearings

Coefficient of Friction

A frequent misconception of Plain bearings is that wear and friction are basically synonymous, in that, high friction equals high wear or that low friction equals low wear. While there can be a relation between the two, they should be addressed as separate issues in the design process.

For example, dry running virgin (unfilled) PTFE on steel's coefficient of friction (c.o.f.) is approximately 0.1 while filled PTFE's c.o.f. can range from 0.125 to 0.4 depending on the fillers used. By comparison, however, the virgin PTFE will wear at a much greater rate.

FRICITION TEST SAMPLE #1

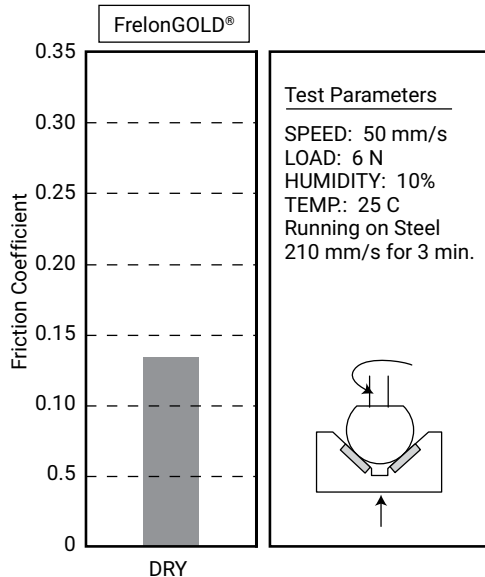

Conducted by: Dr. Tillwich GmbH

Managing Director: Mr. Werner Stehr (World leading tribologist with a seat on the ISOTC123 Committee establishing standards for tribological testing)

Bearing Material: FrelonGOLD®

Shaft Material: Standard RC60 steel shafting

Surface Finish: 8-12 Ra

Speed: 50 mm/sec.


Load: 6 N

Temperature: 25° C

Lubrication: None

Average Coefficient of Friction:
FrelonGOLD = 0.125

FRICITION TEST SAMPLE #2

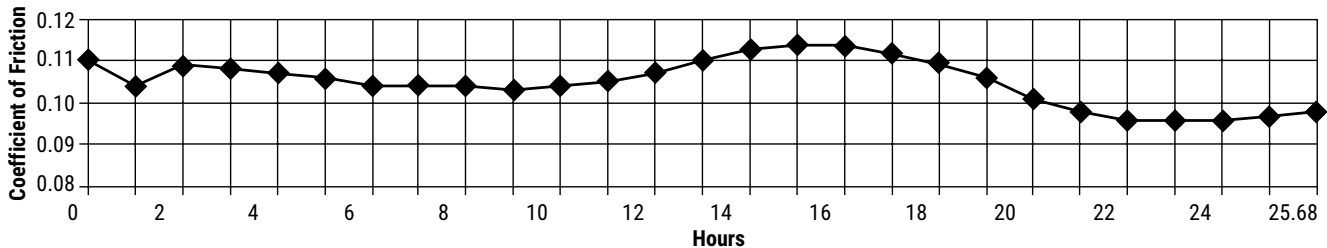

Conducted by: FrelonGOLD material processor

Bearing Material: FrelonGOLD

Shaft Material: CRS 1018

Speed: 100 fpm

Load: 100 psi

Duration: 25.68 hours

Lubrication: None

Surface Finish: 8 Ra

Average COF: 0.10

Max. COF: 0.15

Min. COF: 0.08

Average Running Temperature: 95.4° F

Cantilevered Loads Plain Bearings

Cantilevered Loads

- Maximum 2:1 ratio
- 1x = bearing separation on same shaft
- 2x = distance from shaft to load or force

Example: If 2x equals 10" then 1x must be at least 5"




Binding will occur if the 2:1 ratio is exceeded!!

This principle is NOT load dependent. It is NOT due to edge loading. It is also NOT dependent on the driving force used. The bearings will bind whether hand or mechanically driven. This principle is a product of friction.

Working through the following equation will explain why this is a product of friction:

P = force being applied
 L = distance out from shaft that P is being applied
 s = center to center spacing of bearings
 f = resultant force on bearings by shaft
 F = friction force on each bearing
 μ = coefficient of friction (about 0.25 when not moving)

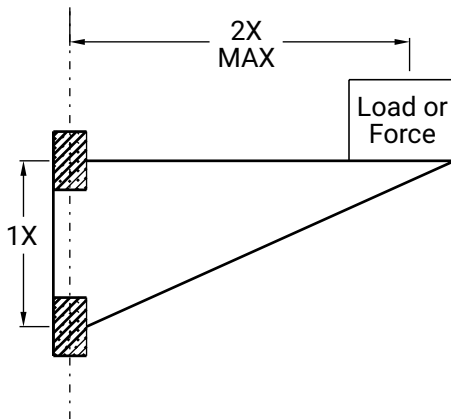

Balance the moments: $f \cdot s = L \cdot P$

$$L / s = f / P$$

Compute friction force: $F = f \cdot \mu$

Note: Total friction force pushing up is $2 \cdot F$. To lock up the slide, the total friction force must be equal to (or greater than) P.

$$P = 2 \cdot F = 2 \cdot f \cdot \mu$$

Substitute for P:


$$L / s = f / (2 \cdot f \cdot \mu) = 1 / (2 \cdot \mu) \Rightarrow L / s = 1 / (2 \cdot \mu)$$

Note: The forces drop out of the equation.

Assume static coefficient of friction is 0.25 ($\mu = 0.25$) then $L / s = 2$ That is the 2:1 ratio.

There may be other factors that add to the braking effect, but the coefficient of friction is the main cause.

Note: Proper lubrication can help to drop friction and extend the 2:1 ratio.

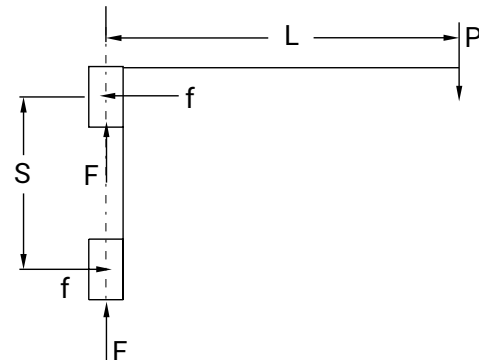

Cantilevered Loads Plain Bearings

Counterbalance

If holding the 2:1 ratio is not possible, one method of preventing binding problems is using a counter balance.

For efficient counter balances in horizontal applications, use this formula:

$$M \cdot Y = W \cdot Z$$

Note: To avoid problems when running without mass:

$$(M) Z = 1-1/2 s$$


W can be calculated. Load on bearing will be:

$$\frac{M + W}{\text{\# of bearings}}$$

Example: $50 \cdot 24 = W \cdot Z$ ($Z = 1-1/2 \cdot 6 = 9$)

$$W = \frac{50 \cdot 24}{9} = 133 \text{ lb.}$$

$$\text{Load per bearing: } \frac{50 + 133}{4} = 45.75 \text{ lb. / bearing}$$

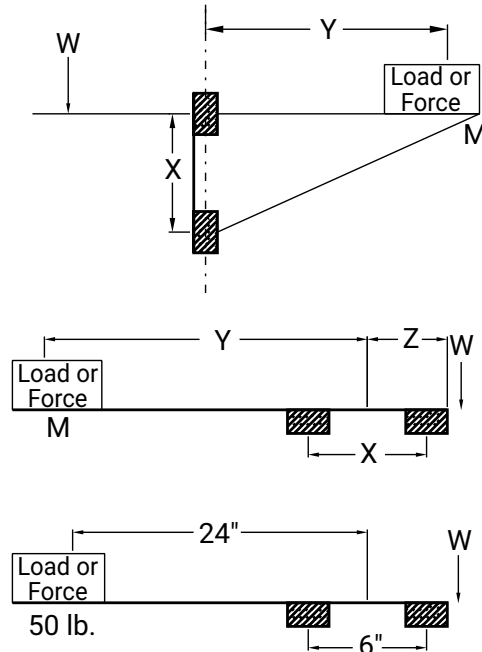

Cantilever Loads and Drive Force Location without Counterbalance


d=distance from shaft to Drive Force

l =distance from shaft to the load center of gravity

s=center-to-center spacing of the bearings on the shaft
(If non-self-aligning, then outside to outside distance should be used.)

$L = l / s$ = Load Force Ratio


$D = d / s$ = Drive Force Ratio

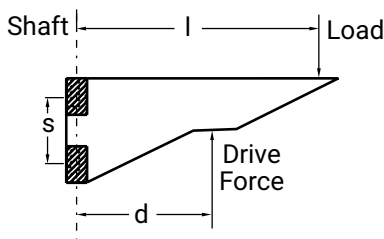

Hanging or "Top Heavy" Horizontal Applications with High Acceleration Rates:

If your application will have high acceleration forces, use this formula for the value of the Drive Force Ratio:

$$D = 0.8 \cdot L \times a \text{ where } a \text{ is acceleration in g's.}$$

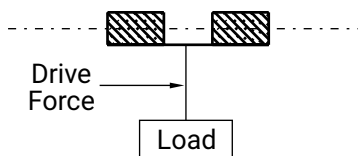

General Rules:

1. Drive Force Ratio (D) should never be larger than 2. A Drive Force Ratio (D) larger than 2 can cause the slide to lock up.
2. Load Force Ratio (L) can be larger than 2, but as this ratio increases, the drive force required to move the slide increases dramatically. A Load Force Ratio (L) larger than 4 is not recommended.
3. If the slide is occasionally operated unloaded, use the distance to the slide's center of gravity as the distance to the load (l).

Vertical Applications:

1. If L is between 0 and 2, the lowest drive forces occur when the value of D is about 90% of L ($D = 0.9 \cdot L$). However, D values between 0 and L will work fine.
2. If L is between 2 and 4, use this equation: $D = 4 - L$

Horizontal Applications:

For best results, the drive force should be applied as close to the shaft as possible no matter what the value of the Load Force Ratio (L) is.

Shaft Deflection


Single Point Shaft Deflection

In applications where a support rail is not used, shaft deflection can become critical in the function of the bearing. If deflection is greater than the misalignment capabilities of a standard pillow block, binding can occur.

One solution would be to increase shaft and bearing size (to lessen the amount of deflection) or to use an open bearing configuration with a support rail.

Follow the formulas below to check shaft deflection and sag.

Deflection at Center

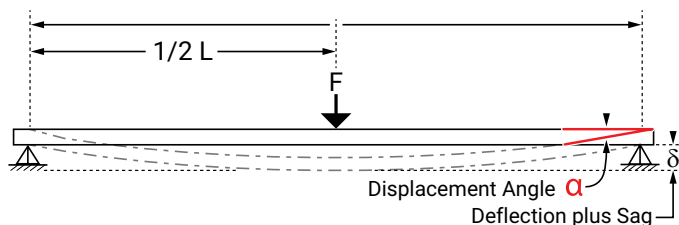

Formula for Inch and Metric Shaftering Deflection

Total shaft deflection in horizontal applications:

$$\text{Total Deflection } (\delta) = \text{Def} + \text{Sag} = \frac{FL^3}{48EI} + \frac{5wL^4}{384EI}$$

$$\text{Deflection} = (FL^3) / (48EI)$$

$$\text{Sag} = (5wL^4) / (384EI)$$

Deflection = Deflection due to load at center of shaft*

Sag = Deflection of shaft due to its own weight*

L = Shaft unsupported length*

F = load being applied at center of shaft**

α = Displacement angle

EI = (Modulus of Elasticity, **E**) • (Second Moment of Area, **I**)

w = Unit weight of shaft. (lb/in for inch shafts and N/mm for metric shafts)

* inch for inch shafts, mm for metric shafts

** lb for inch shafts, N for metric shafts

Notes: $I = \pi \cdot \text{diam}^4 / 64$

$sw = \pi \cdot \text{diam}^2 / 4 \cdot \text{density}$

E = Modulus of Elasticity (Young's modulus)

Total Deflection Example

ø1 in. Shaft

24 in. Length (L)

250 lb. load (W)

$$\text{Deflection} = \frac{F \cdot L^3}{48EI}$$

$$= \frac{250 \text{ lb.} \cdot (24 \text{ in.})^3}{48(1.45 \cdot 10^6) \text{ in.}^2 \text{ lb.}}$$

$$= \frac{3,456,000 \text{ in.}^3 \text{ lb.}}{69,600,000 \text{ in.}^2 \text{ lb.}}$$

$$\text{Deflection} = 0.0497 \text{ in.}$$

$$\text{SAG} = \frac{5wL^4}{384EI}$$

$$= \frac{5(0.222)(24^4) \text{ lb. in}^3}{384(1.45 \cdot 10^6) \text{ lb. in}^2}$$

$$\text{SAG} = \frac{368,271 \text{ lb. in}^3}{556,800,000 \text{ lb in}^2}$$


$$\text{SAG} = 0.000661 \text{ in.}$$

$$\text{Total Deflection } (\delta) = \text{Deflection} + \text{SAG} \\ = 0.0497 \text{ in.} + 0.000661 \text{ in.}$$

$$\text{Total Deflection } (\delta) = 0.0504 \text{ in.}$$

Shaft Deflection

Two Point Shaft Deflection

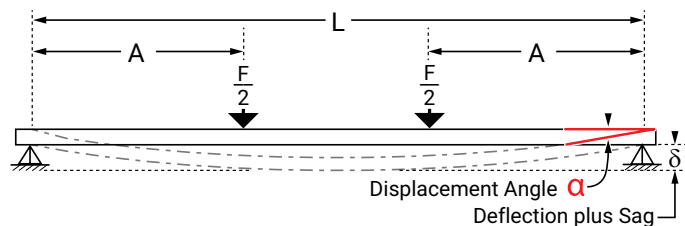

$$\delta = \frac{FA(3L^2 - 4A^2)}{48EI} + \frac{5wL^4}{384EI}$$

	Shaft Unit of measure	Inch	Metric
δ	= Total Deflection	in.	mm
L	= Distance between the shaft support	in.	mm
E	= Modulus of elasticity	lb./in. ²	N/mm ²
I	= Shaft moment of inertia	in. ⁴	mm ⁴
w	= Unit weight of shaft (ref. table below)	lb./in.	N/mm
F	= Load applied (including carriage weight)	lb.	N
A	= Distance to end	in.	mm
α	= Displacement angle	deg.	deg.


Inch Shafting

Shaft Diameter	Hardened Steel		Stainless Steel	
	EI LB·IN. ²	w LB/IN.	EI LB·IN. ²	w LB/IN.
3/16"	1.76E+03	0.0077	1.76E+03	7.70E-03
1/4"	5.60E+03	0.0138	5.59E+03	1.37E-02
3/8"	2.85E+04	0.0311	2.84E+04	3.10E-02
1/2"	9.04E+04	0.0553	9.01E+04	5.51E-02
5/8"	2.21E+05	0.0865	2.20E+05	8.62E-02
3/4"	4.59E+05	0.1250	4.57E+05	1.24E-01
7/8"	8.51E+05	0.1700	-	-
1"	1.45E+06	0.2220	1.45E+06	2.21E-01
1-1/8"	2.33E+06	0.2810	-	-
1-1/4"	3.55E+06	0.3470	3.54E+06	3.46E-01
1-3/8"	5.20E+06	0.4200	-	-
1-1/2"	7.36E+06	0.4990	7.33E+06	4.98E-01
1-3/4"	1.36E+07	0.6800	-	-
2"	2.33E+07	0.8880	2.32E+07	8.85E-01
2-1/2"	5.68E+07	1.3900	-	-
3"	1.18E+08	2.0000	-	-
4"	3.72E+08	3.5500	-	-

Metric Shafting

Shaft Diameter	Hardened Steel		Stainless Steel	
	EI N·mm ²	w N/mm	EI N·mm ²	w N/mm
4 mm	2.54E+06	0.00096	2.53E+06	0.00096
5 mm	6.22E+06	0.00150	6.19E+06	0.00150
6 mm	1.29E+07	0.00217	1.29E+07	0.00216
8 mm	4.10E+07	0.00386	4.08E+07	0.00384
10 mm	1.00E+08	0.00603	9.96E+07	0.00601
12 mm	2.08E+08	0.00869	2.07E+08	0.00866
16 mm	6.57E+08	0.01550	6.54E+08	0.01540
20 mm	2.54E+09	0.02420	1.60E+09	0.02410
25 mm	3.92E+09	0.03780	3.90E+09	0.03760
30 mm	8.14E+09	0.05440	8.10E+09	0.05420
40 mm	2.57E+10	0.09670	2.56E+10	0.09640
50 mm	6.28E+10	0.15100	6.25E+10	0.15100
60 mm	1.30E+11	0.21800	-	-
80 mm	4.12E+11	0.38700	-	-

Displacement Angle (values calculated on previous page)

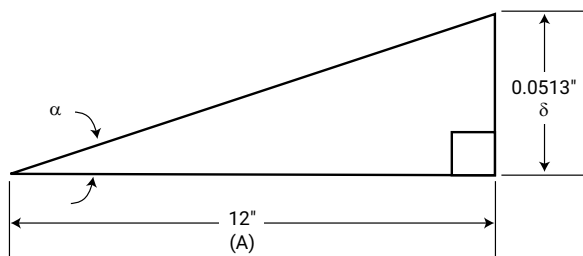

$$\pm = \tan^{-1} \frac{\delta}{A}$$

$$\pm = \tan^{-1} \frac{0.0504 \text{ in.}}{12 \text{ in.}}$$

$$\pm = 0.240^\circ \text{ Displacement Angle}$$

$$0.240^\circ < 1/2^\circ \text{ Allowable} = \text{Good Design}$$

Installation Simplicity® Linear Plain Bearings

Installing Simplicity® Bearings

Applies to standard linear bearing series.

For sleeve and flange bearings, see product pages 38–39, 60–62, 70–71, and 78–80.

Straight Bore Housing – Press Fit Bearing

This type of configuration is NOT recommended for the vast majority of applications using Simplicity bearings.

It does NOT allow for any misalignment or shaft deflection.

Misalignment or shaft deflection will cause the bearing to bind on the shafting.

Extremely high precision applications may be able to employ this type of mounting. Typically the shafting has been aligned with a laser or some other highly precise equipment.

Due to bore closure in the pressing process, use a “C” series (compensated I.D.) bearing.

Example: FLC24, FMC30, FJC30.

The recommended installation procedure is to freeze the bearings at 0°F (-17.75°C) for 30-45 minutes. Using gloves, remove the bearings from the freezer and slip them into the housing. As they heat to room temperature, full contact between bearing and housing will be achieved. The greatest advantage to this technique over traditional pressing is greater accuracy in alignment.

This type of mounting will not allow for misalignment or shaft deflection. Both are very critical in the smooth operation of Simplicity bearings. A rolling element bearing may appear to initially operate in this condition, but it is operating in an extremely preloaded condition and will prematurely fail and in most cases destroy the shafting. Simplicity bearings will indicate the problem immediately upon installation by failing to move due to the binding condition. There are alternative mounting options that work extremely well.

Part No.	MIN Housing I.D. in.	MAX Housing I.D. in.	Part No.	MIN Housing I.D. mm	MAX Housing I.D. mm	Part No.	MIN Housing I.D. mm	MAX Housing I.D. mm	Part No.	MIN Housing I.D. mm	MAX Housing I.D. mm	Part No.	MIN Housing I.D. mm	MAX Housing I.D. mm
FLC03	0.3729	0.3737	FMC05	11.972	11.995	FMTC06	11.954	11.972	FGC06	11.952	11.970	FJC06	11.961	11.979
FLC04	0.4978	0.4986	FMC08	15.954	15.972	FMTC08	14.954	14.972	FGC08	14.952	14.970	FJHC08	14.961	14.979
FLC06	0.6228	0.6236	FMC10	18.948	18.969	FMTC10	16.954	16.972	FGC10	16.952	16.970	FJC08	14.961	14.979
FLC08	0.8725	0.8734	FMC12	21.944	21.965	FMTC12	18.948	18.969	FGC12	21.945	21.966	FJC10	18.952	18.973
FLC10	1.1224	1.1234	FMC16	25.944	25.965	FMTC14	20.944	20.965	FGC15	24.945	24.966	FJC12	20.952	20.997
FLC12	1.2474	1.2484	FMC20	31.940	31.961	FMTC16	23.944	23.965	FGC16	25.945	25.966	FJC13	22.952	22.973
FLC16	1.5596	1.5607	FMC25	39.932	39.957	FMTC20	27.944	27.965	FGC18	27.945	27.966	FJC16	27.952	27.973
FLC20	1.9970	1.9981	FMC30	46.932	46.957	FMTC25	34.940	34.961	FGC20	31.945	31.966	FJC20	31.950	31.971
FLC24	2.3717	2.3729	FMC40	61.917	61.947	FMTC30	39.932	39.957	FGC25	39.937	39.962	FJC25	39.941	39.966
FLC32	2.9965	2.9977	FMC50	74.917	74.947	FMTC40	51.932	51.957	FGC30	44.937	44.962	FJC30	44.941	44.966
FLC40	3.7461	3.7473	FMC60	89.906	89.936	FMTC50	61.917	61.947	FGC35	51.937	51.962	FJC35	51.938	51.963
FLC48	4.4953	4.4966	FMC80	119.886	119.921				FGC40	59.927	59.957	FJC38	56.938	56.963
FLC64	5.9949	5.9963							FGC50	74.927	74.957	FJC40	59.928	59.958
												FJC50	79.922	79.952
												FJC60	89.919	89.949
												FJC80	119.899	119.934
												FJC100	149.896	149.931
												FJC120	179.875	179.915
												FJC150	209.849	209.895

Installation Simplicity® Linear Plain Bearings

Straight Bore Housing - Slip Fit Bearing

There are three basic configurations that work well, depending on the misalignment and shaft deflection in the application:

1. Virtually NO misalignment

This method allows for NO or very little shaft deflection and misalignment. Standard I.D. bearings will need tighter alignment than a "C" series (compensated I.D.) bearing. Standard retention methods are acceptable.

Example: snap rings, epoxy, etc.

Note: If using epoxy, do not touch the bearing liner with the bonding agent.

This type of mounting will allow for minimum misalignment or shaft deflection. Both are very critical in the smooth operation of Simplicity bearings. A rolling element bearing may appear to initially operate in this condition, but it is operating in an extremely preloaded condition and will prematurely fail and in most cases destroy the shafting. Simplicity bearings will indicate the problem immediately upon installation by failing to move due to the binding condition.

Part No.	MIN Housing I.D. in.	MAX Housing I.D. in.	Part No.	MIN Housing I.D. mm	MAX Housing I.D. mm	Part No.	MIN Housing I.D. mm	MAX Housing I.D. mm	Part No.	MIN Housing I.D. mm	MAX Housing I.D. mm	Part No.	MIN Housing I.D. mm	MAX Housing I.D. mm
FL03	0.3755	0.3764	FM05	12.016	12.043	FMT06	12.016	12.043	FG06	12.016	12.043	FJ06	12.016	12.043
FL04	0.5006	0.5017	FM08	16.016	16.043	FMT08	15.016	15.043	FG08	15.016	15.043	FJH08	15.016	15.043
FL06	0.6256	0.6267	FM10	19.020	19.053	FMT10	17.016	17.043	FG10	17.016	17.043	FJ08	15.016	15.043
FL08	0.8758	0.8771	FM12	22.020	22.053	FMT12	19.020	19.053	FG12	22.020	22.053	FJ10	19.020	19.053
FL10	1.1258	1.1271	FM16	26.020	26.053	FMT14	21.020	21.053	FG15	25.020	25.053	FJ12	21.020	21.053
FL12	1.2510	1.2525	FM20	32.025	32.064	FMT16	24.020	24.053	FG16	26.020	26.053	FJ13	23.020	23.053
FL16	1.5635	1.5650	FM25	40.025	40.064	FMT20	28.020	28.053	FG18	28.020	28.053	FJ16	28.020	28.053
FL20	2.0012	2.0030	FM30	47.025	47.064	FMT25	35.025	35.064	FG20	32.025	32.064	FJ20	32.025	32.064
FL24	2.3762	2.3780	FM40	62.030	60.076	FMT30	40.025	40.064	FG25	40.025	40.064	FJ25	40.025	40.064
FL32	3.0012	3.0030	FM50	75.030	75.076	FMT40	52.030	52.076	FG30	45.025	45.064	FJ30	45.025	45.064
FL40	3.7514	3.7535	FM60	90.036	90.090	FMT50	62.030	62.076	FG35	52.030	52.076	FJ35	52.030	52.076
FL48	4.5014	4.5035	FM80	120.036	120.090				FG40	60.030	60.076	FJ38	57.030	57.076
FL64	6.0017	6.0042							FG50	75.030	75.076	FJ40	60.030	60.076
												FJ50	80.030	80.076
												FJ60	90.036	90.090
												FJ80	120.036	120.090
												FJ100	150.043	150.106
												FJ120	180.043	180.106
												FJ150	210.050	210.122

Installation Simplicity® Linear Plain Bearings

Straight Bore Housing – Slip Fit Bearing

2. Standard applications with average misalignment

A self-aligning O.D. bearing is recommended. **Example:** FLA24, FMA30, FJA30.

The recommended method of retention for this mounting is a snap ring at each end.

Note: Do not use epoxy in this configuration. It will lock the bearing in place not allowing it to self-align. Be sure to install the o-rings around the O.D. of the bearing to reduce noise while the bearing is in operation. FMT and FG series are NOT available with a self-aligning O.D.

Part No.	MIN Housing I.D. in.	MAX Housing I.D. in.	Part No.	MIN Housing I.D. mm	MAX Housing I.D. mm	Part No.	MIN Housing I.D. mm	MAX Housing I.D. mm	Part No.	MIN Housing I.D. mm	MAX Housing I.D. mm	Part No.	MIN Housing I.D. mm	MAX Housing I.D. mm
FLA03	0.3755	0.3764	FMA05	12.016	12.043	FMT06	N/A	N/A	FG06	N/A	N/A	FJA06	12.016	12.043
FLA04	0.5006	0.5017	FMA08	16.016	16.043	FMT08	N/A	N/A	FG08	N/A	N/A	FJA08	15.016	15.043
FLA06	0.6256	0.6267	FMA10	19.020	19.053	FMT10	N/A	N/A	FG10	N/A	N/A	FJA10	19.020	19.053
FLA08	0.8758	0.8771	FMA12	22.020	22.053	FMT12	N/A	N/A	FG12	N/A	N/A	FJA12	21.020	21.053
FLA10	1.1258	1.1271	FMA16	26.020	26.053	FMT14	N/A	N/A	FG15	N/A	N/A	FJA13	23.020	23.053
FLA12	1.2510	1.2525	FMA20	32.025	32.064	FMT16	N/A	N/A	FG16	N/A	N/A	FJA16	28.020	28.053
FLA16	1.5635	1.5650	FMA25	40.025	40.064	FMT20	N/A	N/A	FG18	N/A	N/A	FJA20	32.025	32.064
FLA20	2.0012	2.0030	FMA30	47.025	47.064	FMT25	N/A	N/A	FG20	N/A	N/A	FJA25	40.025	40.064
FLA24	2.3762	2.3780	FMA40	62.030	60.076	FMT30	N/A	N/A	FG25	N/A	N/A	FJA30	45.025	45.064
FLA32	3.0012	3.0030	FMA50	75.030	75.076	FMT40	N/A	N/A	FG30	N/A	N/A	FJA35	52.030	52.076
FLA40	3.7514	3.7535	FMA60	90.036	90.090	FMT50	N/A	N/A	FG35	N/A	N/A	FJA38	57.030	57.076
FLA48	4.5014	4.5035	FMA80	120.036	120.090				FG40	N/A	N/A	FJA40	60.030	60.076
FLA64	6.0017	6.0042							FG50	N/A	N/A	FJA50	80.030	80.076
												FJA60	90.036	90.090
												FJA80	120.036	120.090
												FJA100	150.043	150.106
												FJA120	180.043	180.106
												FJA150	210.050	210.122

Installation Simplicity® Linear Plain Bearings

Straight Bore Housing – Slip Fit Bearing

3. Severe misalignment

POSSIBLE SOLUTIONS for use with Standard "FL":

1. Undersize the bearing O.D. (see chart) and install o-rings.
2. Oversize the housing I.D. (see chart) and install the standard bearing with o-rings.


The additional clearance created by either method will allow the bearing to float in the housing and match the non-parallelism of the shafting.



This solution is only for SEVERE cases that the standard self-aligning will not accommodate.

The recommended method of retention for this mounting is a snap ring at each end. Accessories, including o-rings can be found on [page 29](#).

Note: Do not use epoxy in this configuration. It will lock the bearing in place, not allowing it to self-align.

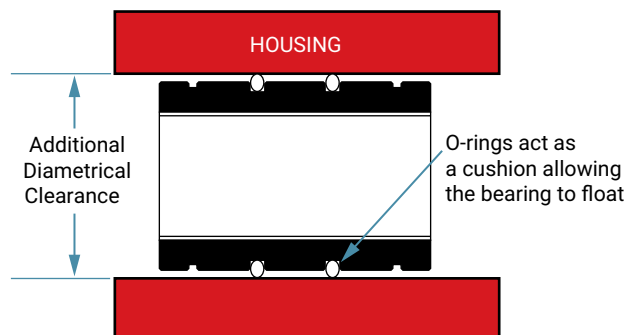

Part No.	MAX Additional Clearance in.
FL03	0.0070
FL04	0.0080
FL06	0.0080
FL08	0.0080
FL10	0.0100
FL12	0.0100
FL16	0.0120
FL20	0.0120
FL24	0.0120
FL32	0.0120
FL40	0.0160
FL48	0.0160
FL64	0.0200

Part No.	MAX Additional Clearance mm
FM05	0.203
FM08	0.203
FM10	0.203
FM12	0.203
FM16	0.254
FM20	0.254
FM25	0.305
FM30	0.305
FM40	0.305
FM50	0.305
FM60	0.406
FM80	0.508

Part No.	MAX Additional Clearance mm
FMT06	0.203
FMT08	0.203
FMT10	0.203
FMT12	0.203
FMT14	0.203
FMT16	0.254
FMT20	0.254
FMT25	0.254
FMT30	0.305
FMT40	0.305
FMT50	0.305

Part No.	MAX Additional Clearance mm
FG06	0.203
FG08	0.203
FG10	0.203
FG12	0.203
FG15	0.254
FG16	0.254
FG18	0.254
FG20	0.254
FG25	0.305
FG30	0.305
FG35	0.305
FG40	0.305
FG50	0.305

Part No.	MAX Additional Clearance mm
FJ06	0.203
FJH08	0.203
FJ08	0.203
FJ10	0.203
FJ12	0.203
FJ13	0.203
FJ16	0.254
FJ20	0.254
FJ25	0.305
FJ30	0.305
FJ35	0.305
FJ38	0.305
FJ40	0.305
FJ50	0.406
FJ60	0.406
FJ80	0.508
FJ100	0.610
FJ120	0.610
FJ150	0.610

Chemical Reaction Chart

The original Frelon® J has almost universal chemical inertness. Only molten sodium and fluorine at elevated temperatures and pressures show any signs of attack. It is approved for use with liquid oxygen, N2O2 hydrazine, UDMH, hydrocarbon fuels, high strength hydrogen peroxide, etc.

The FrelonGOLD® material is a composite of PTFE and a bearing filler. The PTFE is chemically inert. The chemical resistance shown in the chart below is defined by the compatibility of the filler with the various chemicals.

Other data in the chart below applies to the bearing shell and pillow block materials. The table is provided as a reference only. The data given will be affected by factors such as temperature, PV, degree of contact, strength of solution, etc. In each specific application, it is always advisable to conduct specific testing to determine suitability of use. This table only addresses general corrosion, NOT galvanic, SCC, or other types of corrosion. Corrosion rates are at room temperature unless otherwise noted.

Standard and hard coat data only apply when the coating is intact. If the coating is worn through or damaged, an area of galvanic and pitting corrosion will be created. Then use the bare aluminum data.

Standard Simplicity® products use aluminum alloy, which is known to have the best corrosion resistance of the high strength aluminum alloys. The

sulfuric bath anodizing and nickel acetate sealing provide the best corrosion resistance available in anodized coatings. They can withstand a rigorous 14-day exposure in a 5% salt spray solution at 96°F per military specifications without significant damage. With the coating intact, it is considered to be inert in most fluids with a pH value between 5 and 8. Hard coat anodizing provides the same chemical resistance but is applied to a 0.002" thickness, providing a more durable surface that will stand up to greater abuse. However, if the coating is penetrated, the resistance is reduced.

Special stainless steel bearings use AISI 316 stainless, which has superior resistance over 303, 304, 420, 440, 17-4PH, and most other common stainless grades. 316 is generally considered to be the most corrosion resistant of conventional stainless steels.

Note: This information was compiled for Pacific Bearing® Company by Materials Engineering, Inc. of Virgil, IL. This specification information is believed to be accurate and reliable, however, no liability is assumed. Information is for reference only. User must test specific applications.

Performance	Wear
E = Excellent	< 0.002" per year
G = Good	< 0.020" per year
S = Satisfactory	< 0.050" per year
U = Unsatisfactory	> 0.040" per year

Chemical	Frelon GOLD	Bare Aluminum	Standard & Hard Coat Anodized Aluminum	316 Stainless Steel
Acetic Acid, 20%	U	G	G	E
Acetone	G	E	E	E
Ammonia, Anhydrous	G	E	E	E
Ammonium Hydroxide, 10%	U	U	U	E
Ammonium Chloride, 10%	U	U	U	G
Ammyl Acetate (122°F / 50°C)	G	E	E	E
Barium Hydroxide	U	U	U	G
Beer	G	E	E	E
Boric Acid Solutions	G	E	E	G
Butane	G	G	G	G
Calcium Chloride, 20%	G	G	G	G
Calcium Hydroxide, 10%	G	G	G	G
Carbon Dioxide	G	E	E	G
Carbon Monoxide	G	E	E	E
Chlorine Gas, Dry	G	G	G	G
Chlorine Gas, Wet	U	U	U	U
Chromic Acid, 10%	U	G	E	E
Citric Acid, 5%	G	E	E	E
Ethyl Acetate	G	E	E	G
Ethyl Alcohol	G	E	E	G
Ethylene Glycol	G	E	E	G
Ferric Chloride, 50%	U	U	U	U
Formic Acid - Anhydrous	U	E	E	E
Gasoline, Unleaded	G	G	G	G
Hydrochloric Acid, 20%	U	U	U	U
Hydrochloric Acid, 35%	U	U	U	U
Hydrocyanic Acid, 10%	U	G	G	G
Hydrofluoric Acid - Dilute	U	U	U	U
Hydrofluoric Acid, 48%	U	U	U	U
Hydrogen	G	E	E	E
Hydrogen Peroxide - Dilute	U	E	E	G

Chemical	Frelon GOLD	Bare Aluminum	Standard & Hard Coat Anodized Aluminum	316 Stainless Steel
Hydrogen Sulfide, Dry	U	G	E	E
JP-4	G	G	G	G
Kerosene	G	G	G	G
Lactic Acid, 10%	G	G	G	E
Magnesium Chloride, 50%	G	U	U	G
Mercury	U	U	U	E
Methyl Alcohol	G	G	G	G
Methyl Ethyl Ketone	G	G	G	G
Methylene Chloride	G	E	E	G
Mineral Oil	G	G	G	G
Naptha	G	G	G	G
Nitric Acid, 70%	U	U	U	E
Phosphoric Acid, 10%	U	U	U	E
Sodium Chloride	G	U	U	E
Sodium Hydroxide, 20%	G	U	U	G
Sodium Hypochlorite, 20%	U	G	G	U
Sodium Peroxide, 10%	U	G	G	G
Steam (see water)	-	-	-	-
Sulfur Dioxide, Wet	U	U	U	G
Sulfur Dioxide, Dry	G	G	G	G
Sulfur Trioxide	U	G	G	G
Sulfuric Acid, 50%	U	U	U	U
Sulfurous Acid	U	G	G	E
Toluene (122°F / 50°C)	G	E	E	E
Turpentine	G	G	E	E
Water, Demineralized	U	G	E	E
Water, Distilled	G	U	S	G
Sea Water	G	G	E	G
Water, Sewage	G	U	S	G
Xylene	G	G	G	G
Zinc Chloride Solutions	U	U	U	G


EconoGlide Chemical Reaction Chart

EconoGlide Frelon® IM Chemical Reaction Chart.

EconoGlide bearings use aluminum alloy for the housing, which is known to have the best corrosion resistance of the high strength aluminum alloys. The sulfuric bath anodizing and nickel acetate sealing provide the best corrosion resistance available in anodized coatings. They can withstand a rigorous 14-day exposure in a 5% salt spray solution at 96°F per military specifications without significant damage. With the coating intact, it is considered to be inert in most fluids with a pH value between 5 and 8. Hard coat anodizing provides the same chemical resistance but is applied to a 0.002" thickness, providing a more durable surface that will stand up to greater abuse. However, if the coating is penetrated, the resistance is reduced.

Note: This information is believed to be accurate and reliable, however, no liability is assumed. Information is for reference only. User must test specific applications.

Chemical	Frelon IM
Oil Grease	Resistant
Diluted Acid	Conditionally Resistant
Strong Acid	Not Resistant
Diluted Alkali	Resistant
Strong Alkali	Conditionally Resistant
UV Resistance	Moderate Resistance
Radiation Resistance	3x10^2 Gy

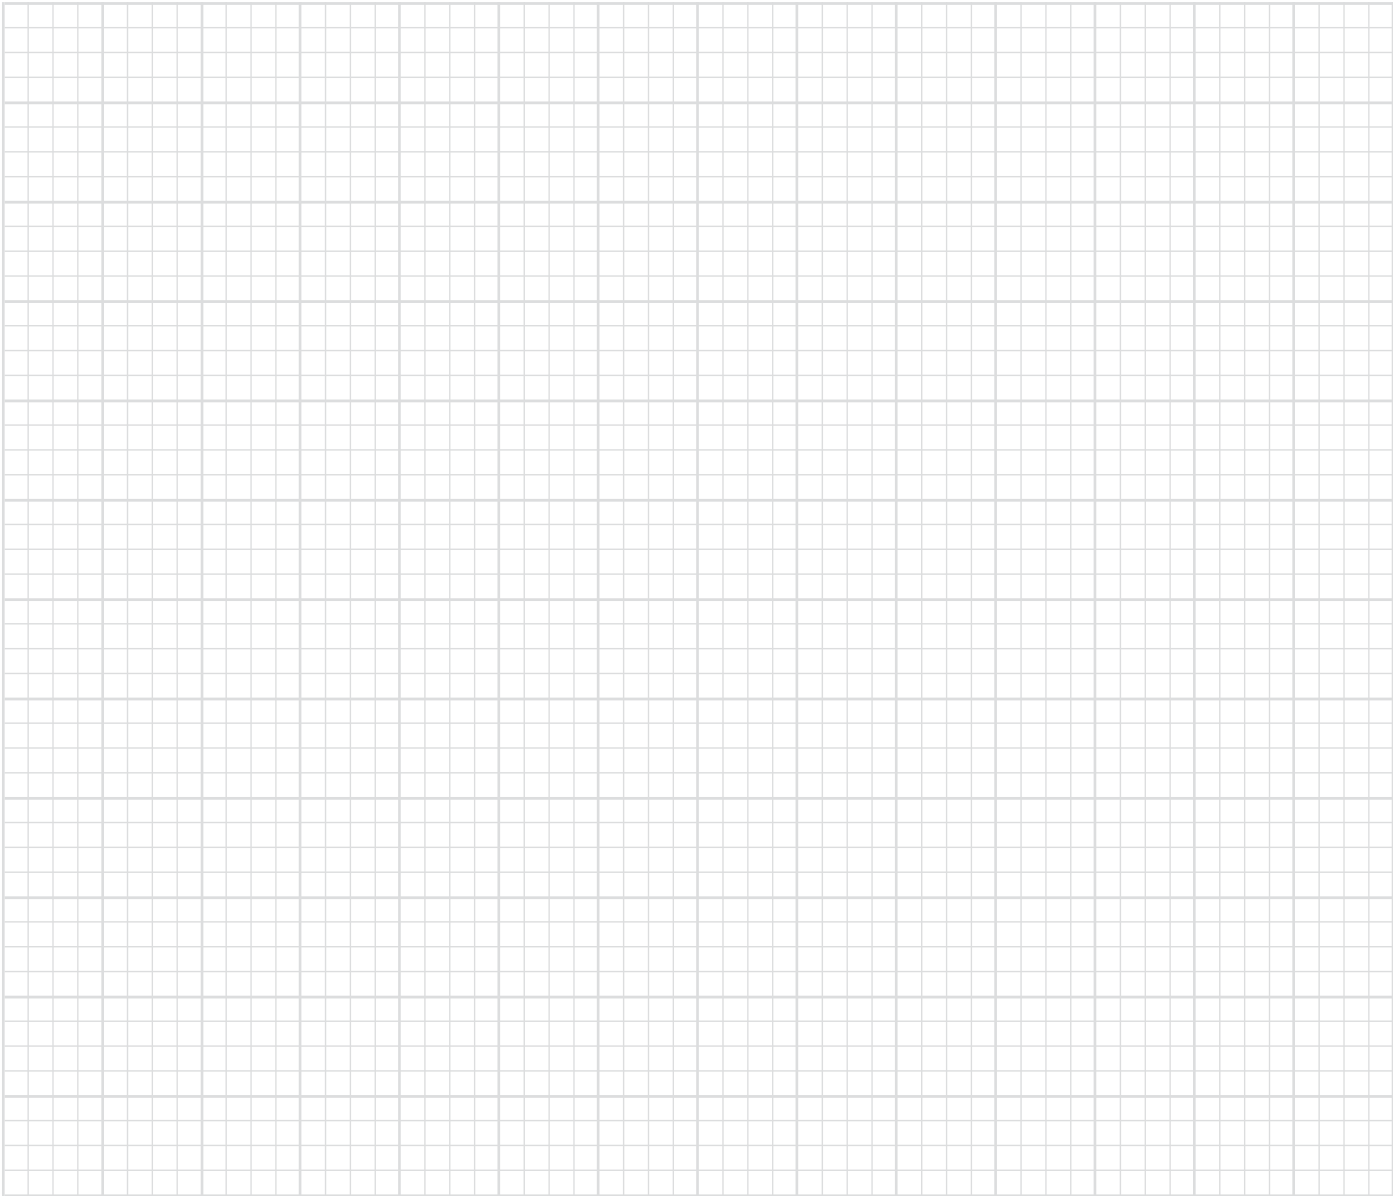

Linear Ball Bearings Technical Information

Load Rating and Life Expectancy

The life (L) of a linear bearing can be obtained from the following equation with the basic dynamic load rating and the load applied to the bearing:

$$L = \left(\frac{f_H \cdot f_T \cdot f_C \cdot C}{f_W \cdot P} \right)^3 \cdot 50 \quad (1)$$

- L:** Rated life (km)
C: Basic dynamic load rating (N/lbf)
P: Working load (N/lbf)
f_W: Load coefficient
f_H: Hardness factor
f_T: Temperature coefficient
f_C: Contact coefficient

The lifespan (L_h) of a linear ball bearing in hours can be obtained by calculating the traveling distance per unit time. The lifespan can be obtained from the following equation if the stroke length and the number of strokes are constant:

$$L_h = \left(\frac{L \cdot 10^3}{2 \cdot s \cdot n_1 \cdot 60} \right) \quad (2)$$







- L_h:** Lifespan (hr)
L: Rated life (km)
s: Stroke length (m)
n₁: Number of strokes per minute (cpm)
50: Constant base line (km)

Relation Between Ball Circuits and Load Rating

Linear ball bearings are constructed so that the ball circuits are spaced equally. The load rating varies according to the loaded position. The load ratings of the linear ball bearings from the dimensional tables are per track and increased loading can be achieved by equally sharing the load between the tracks.

The table shows the increased value by the number of ball circuits in such cases.

Notes: (1) 3 track bearing is equal.
 (2) Open bearing load is de-rated by 50% if going against the opening.

Number of Rows	4	5	6
Co Load Rating Specified on the Tables			
Co _{max} MAX Load Rating			
Load Ratio Co _{max} / Co	1.414	1.463	1.280

Sample Calculations

1. Obtaining the rated life L and lifespan L_h of the Simplicity® linear ball bearing used in the following conditions:

- Linear ball bearing: EP20G
- Stroke length: 50 mm
- Number of strokes per minute: 50 cpm
- Load per bush: 490 N

The basic dynamic load rating of the linear ball bearing is 860 N from the dimension tables on page 79. From equation (1), therefore, the rated life L is obtained as follows:

$$L = \left(\frac{f_H \cdot f_T \cdot f_C \cdot C}{f_W \cdot P} \right)^3 \cdot 50 \quad f_H = f_T = f_C = f_W = 1.0$$

$$= \left(\frac{860}{490} \right)^3 \cdot 50 = 270 \text{ km}$$

From equation (2), the lifespan L_h is obtained as follows:

$$L_h = \frac{L \cdot 10^3}{2 \cdot s \cdot n_1 \cdot 60} = \frac{270 \cdot 10^3}{2 \cdot 0.05 \cdot 50 \cdot 60} = 901 \text{ hr}$$

2. Select the ball bearing type by satisfying the following conditions:

- Number of linear bushing used 4
- Stroke length 1 m
- Traveling speed 10 m/min.
- Number of strokes per minute 5 cpm
- Lifespan 10,000 hr
- Total load 980 N

From equation (2), the traveling distance within the lifespan is obtained as follows:

$$L = 2 \cdot s \cdot n_1 \cdot 60 \cdot L_h = 6,000 \text{ km}$$

From equation (1), the basic dynamic load rating is obtained as follows:

$$C = \sqrt[3]{\frac{L}{50} \cdot \left(\frac{f_W}{f_H \cdot f_T \cdot f_C} \right) \cdot P} = 1492 \text{ N}$$

Assume the following with a pair of shafts each with two linear ball bearings: f_C = 0.81 f_W = f_T = f_H = 1

As a result, EP20G is selected from the dimension table as the Simplicity® linear ball bearing type satisfying the value of C.

Load Rating & Rating Life Linear Ball Bearings

Load Rating

Basic Dynamic Load Rating (C) –

This term is arrived at based on an evaluation of a number of identical linear systems individually run in the same conditions, if 90% of them can run with the load (with a constant value in a constant direction) for a distance of 50 km without damage caused by rolling fatigue. This is the basis of the rating.

Allowable Static Moment (M) –

This term defines the allowable limit value of static moment load, with reference to the amount of permanent deformation similar to that used for evaluation of basic rated load (Co).

Static Safety Factor (fs) –

This factor is used based on the application condition.

STATIC SAFETY FACTORS Table 1

Condition of use	Low Limit of fs
When the shaft has less deflection and shock	1 to 2
When elastic deformation should be considered with respect to cantilever load	2 to 4
When the equipment is subject to vibration and impacts	3 to 5

Basic Static Load Rating (Co) –

This term defines a static load such that, at the contacting position where the maximum stress is exercised, the sum of the permanent deformation of the rolling elements and that of the rolling plain is 0.0001 times of the diameter of the rolling elements.

Rating Life

Rating Life of the Linear System

As long as the linear system reciprocates while being loaded, continuous stress can cause flaking on the rolling bodies and planes due to material fatigue. The system's distance of travel until the first flaking occurs is called the life of the system. The life of the system varies even when similar conditions are used – dimensions, structure, material, heat treatment, and processing method. The material fatigue causes the essential variations. The rating life defined below is used as an index for the life expectancy of the linear system.

Rating Life (L)

Rating life is the total travelling distance that 90% of a group of systems of the same size can reach without causing any flaking when they operate under the same conditions. The rating life can be obtained from the following equation with the basic dynamic load rating and the load on the linear system:

$$L = \left(\frac{C}{p} \right)^3 \cdot 50 \quad (1)$$

For ball type:

L: Rating life (km)

C: Basic dynamic load rating (N)

p: Load (N)

Consideration and influence of vibration impact loads and distribution of load should be taken into account when designing a linear motion system. It is difficult to calculate the actual load. The rating life is also affected by the operating temperature. In these conditions, the expression (1) is arranged as follows:

$$L = \left(\frac{f_H \cdot f_T \cdot f_C \cdot C}{f_W \cdot p} \right)^3 \cdot 50$$

For ball type:

L: Rating life (km)

f_H: Hardness factor (See Fig.1)

C: Basic dynamic load rating (N)

f_T: Temperature coefficient (See Fig.2)

p: Load (N)

f_C: Contact coefficient (See Table 2)

f_W: Load coefficient (See Table 3)

The rating life in hours can be calculated by obtaining the travelling distance per unit time. The rating life in hours can be obtained from the following expression when the stroke length and the number of strokes are constant:

$$L_h = \left(\frac{L \cdot 10^3}{2\ell_s \cdot n_1 \cdot 60} \right)$$

L_h: Rating life in hours (hr)

ℓ_s: Stroke length (m)

L: Rating life (km)

n₁: No. of strokes per minute (cpm)


Rating Life Linear Ball Bearings

Rating Life

Hardness Factor (fH)

The shaft must be sufficiently hardened when a linear bushing is used. If not properly hardened, permissible load is lowered and the life of the linear ball bearings will be shortened.


FIG. 1

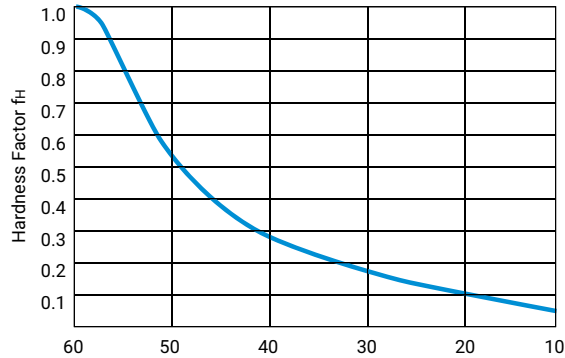

Temperature Coefficient (fT)

If the temperature of the linear system exceeds 100°C, hardness of the linear system and the shaft lowers to decrease the permissible load compared to that of the linear system used at room temperature. As a result, the abnormal temperature rise shortens the rating life.

FIG. 2

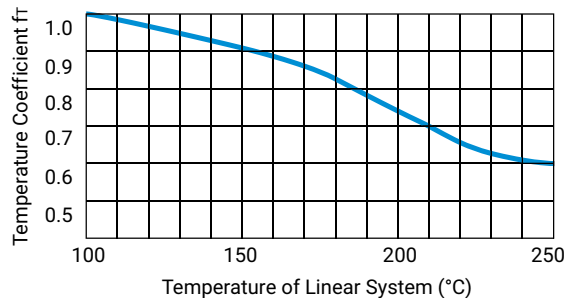

Notes: Maximum temperature of plastic retainer 212°F or 100°C.
Maximum temperature 176° per Table 6 on page 134.

Contact Coefficient (fc) – Table 2

Generally two or more linear bearings are used on one shaft. Thus, the load on each linear system differs depending on each processing accuracy. Because the linear bushings are not loaded equally, the number of linear bushings per shaft changes the permissible load off the system.

CONTACT COEFFICIENT Table 2

Number of Linear Systems per Shaft	Contact coefficient - FC
1	1.00
2	0.81
3	0.72
4	0.66
5	0.61

Load Coefficient (fw) – Table 3

When calculating the load on the linear system, it is necessary to accurately obtain object weight, inertial force based on motion speed, moment load, and each transition as time passes. However, it is difficult to calculate those values accurately because reciprocating motion involves the repetition of start and stop as well as vibration and impact. A more practical approach is to obtain the load coefficient by taking the actual operating conditions into account.

LOAD COEFFICIENT Table 3

Operating Conditions	FW
Operation at low speed (15 m/min. or less) without impulsive shock from outside	1.0 to 1.5
Operation at intermediate speed (60 m/min. or less) without impulsive shock	1.5 to 2.0
Operation at high speed (over 60 m/min.) with impulsive shock from outside	2.0 to 3.5

Clearance & Mounting Linear Ball Bearings

Clearance & Fit

Standard-type Simplicity® linear ball bearings matched to a shaft that provides inadequate clearance may result in early bearing failure and/or rough linear motion. The clearance adjustable linear ball bearings and open linear ball bearings can be adjusted when assembled in the housing by controlling the housing bore. However, too much clearance

will increase the deformation of the linear ball bearing, which will affect its precision and life. Therefore, the appropriate clearance between the ball bearing and shaft, and the appropriate linear ball bearing housing bore are required based on application.

RECOMMENDED FIT OF LINEAR BALL BEARINGS

Model	Division	Shaft		Housing	
		Normal Fit	Transitional	Loose Fit	Tight Fit
JP	High Precision	g6	h6	H7	J7
IP	High Precision	g6	h6	H7	J7
EP	High Precision	h6	j6	H7	J7

Shaft & Housing

To optimize performance of the Simplicity® linear ball bearing it is recommended that a high precision shaft and pillow block are required.

Shaft

The rolling balls in linear ball bearings are in-line contact with the shaft surface. Therefore, the shaft dimensions, tolerance, surface finish, and hardness greatly affect the performance of the linear ball bearing. The shaft should be manufactured to the following tolerances:

1. Surface finish critically affects the smooth rolling of balls; shaft surface finish should be Ra 8-10.

2. Shaft hardness should be HRC 60 to 64. Hardness less than HRC 60 will decrease the life/load.

3. Preload increases the frictional resistance slightly. If the preload is too tight, the deformation of the bearing sleeve will shorten the linear ball bearing's life.


Housing

There are a wide variety of housings differing in design, machining, and mounting. See mounting requirements below.

Mounting






When inserting the linear ball bearing into the housing, do not hit the linear ball bearing on the end-retaining ring, but apply pressure either by hand or arbor on the linear ball bearing sleeve (See Fig.1) To insert the shaft into the mounted linear ball bearing, make sure the shaft is chamfered and be careful not to push on the balls by inserting the shaft at an angle.

Note: If two shafts are used in parallel, the parallelism is an important factor to assure smooth linear movement and not damage the linear ball bearings.



Examples of Mounting

The popular way to mount linear ball bearings is with a slight preload. PBC Linear recommends a slight clearance fit-up to ensure proper life. The examples, Figs. 2 to 6, show the inserted linear ball bearing using a variety of retention methods.



Clearance & Mounting Linear Ball Bearings

Frictional Resistance

The static frictional resistance of the Simplicity® linear system is so low that it is only slightly different from the kinetic frictional resistance, enabling smooth linear movement from low to high speeds. In general, the frictional resistance is expressed by the following equation.

$$F = \mu \cdot W + f$$

F : Frictional resistance μ : Coefficient of friction

W : Load weight f : Sealing resistance

The frictional resistance of each PBC Linear system depends on the model, load weight, speed, and lubricant. The sealing resistance depends on the lip interference and lubricant, regardless of the load weight. The sealing resistance of one linear system is about 200 to 500 gf. The coefficient of friction depends on the load weight, moment load, and preload.

COEFFICIENT OF LINEAR SYSTEM FRICTION (μ) Table 5

Linear System Type	Models	Coefficient of Friction (μ)
Linear Bearing	JP, EP, IP	0.002 to 0.003

Lubrication and Dust Prevention

Using PBC Linear systems without lubrication increases the abrasion of the rolling elements, shortening the life span. Systems, therefore, require appropriate lubrication. PBC Linear ball bearings are shipped with an anti-corrosion treatment, which must be cleaned prior to applying grease or oil. For lubrication, PBC Linear recommends turbine oil conforming to ISO Standards G32 to G68 or lithium base soap grease No.2. Prior to usage, apply lubricant directly inside the linear bearing and shaft, and re-lubricate periodically according to the operating conditions. Some systems from PBC Linear are sealed to block dust out and seal lubricant in. If used in a harsh or corrosive environment a protective cover should be used.

Ambient Working Temperature

The ambient working temperature range for each PBC linear system depends on the model. Consult PBC Linear on use outside the recommended temperature range.

Temperature conversion equation:

$$C = \frac{5}{9} (F - 32) \quad F = 32 + \frac{9}{5} C$$

AMBIENT WORKING TEMPERATURE Table 6


Linear System Type	Models	Ambient Working Temperature
Linear Ball Bearing	JP, EP, IP	-20 to 80°C, -4 to 176°F

Loads Roller Pillow Block Bearings


Orientation & Cantilever Loads

When a linear motion system is subjected to a cantilever load or moment, the system designer must take into consideration these type of loads will greatly affect the performance of the system. Roller Pillow Blocks are not suitable for these types of applications because the moments will load the side rollers and cause premature failure. If the moments or cantilever loads are minor, loads may be acceptable. For this reason we ask that you consult the factory.


Normal Loading

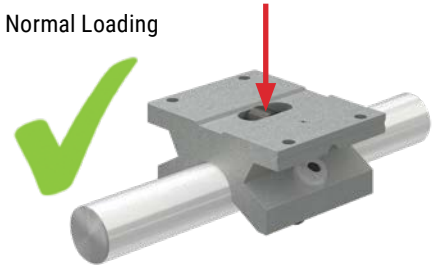

Inverted Load

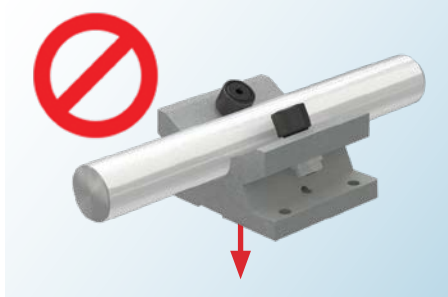


Moment Load
Consult Factory

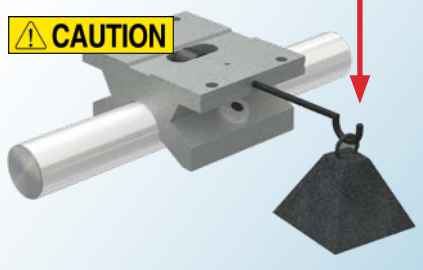

Vertical Load
Consult Factory



Consult Factory
800-962-8979

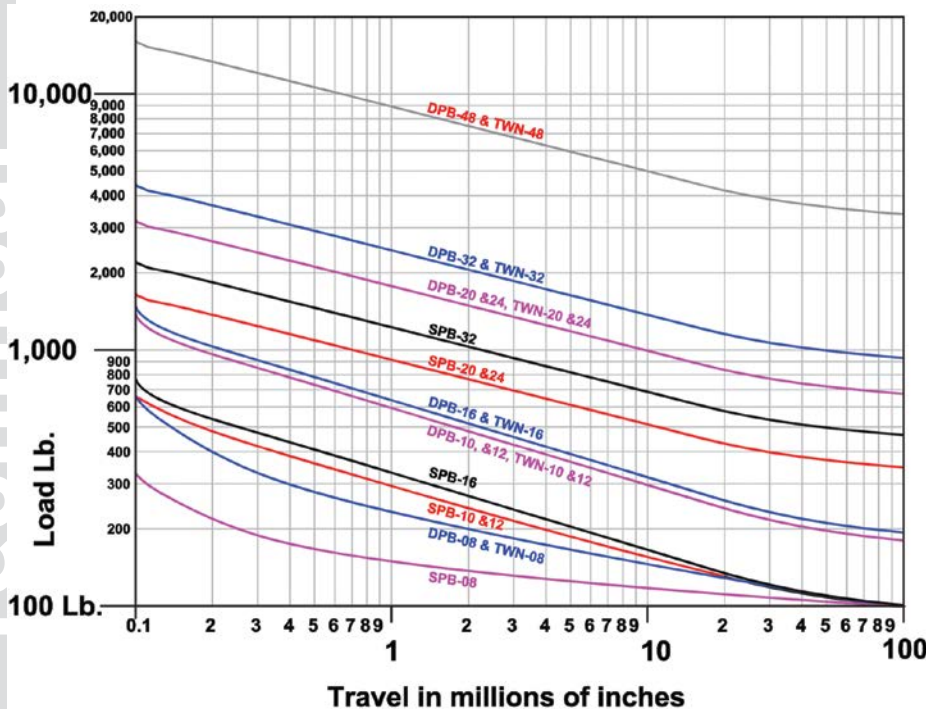

Determining Pillow Block Size & Model

To determine the proper size Roller Pillow Block for an application, refer to the chart using the worst-case load and the required travel life. Select the Roller Pillow Block above where the lines intersect. This should be suitable for anticipated travel life and loading.

Note: Shock, vibration, and moments may affect the life of the pillow block.


Note: Chart is rated at 10% accuracy. Figures are based on a safety factor of one.

Adjustments & Curves Roller Pillow Block Bearings

Adjustments

Roller Pillow Blocks are factory set for Simplicity® 60 Plus® shafting. Adjustments can be made to the eccentric cam follower to either increase or decrease the shaft clearance.

Located on the same side of the Roller Pillow Block as the set screw, the eccentric cam follower is adjusted by using a stubby allen wrench while allowing a 0.002" feeler gauge to freely move between the shaft and the eccentric roller. The fixed side must remain in contact with the shaft. If care is taken not to overload the roller, then a slight pre-load is possible. Rollers should never be tightened to the point where they cannot move freely.

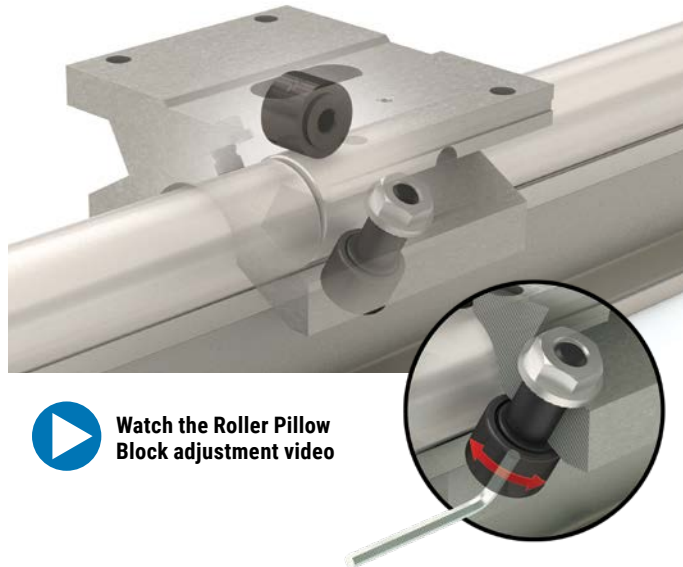


Watch the Roller Pillow Block adjustment video

Turning a Curve

A single Roller Pillow Block has the ability to turn a curve or run on a non-linear system. The following table lists the minimum track radius that the single Roller Pillow Block can tolerate without additional alteration.

Pillow Block Size	Minimum Shaft Radius
8	6"
10	12"
12	14"
16	18"
20	36"
24	40"
32	44"
48	52"

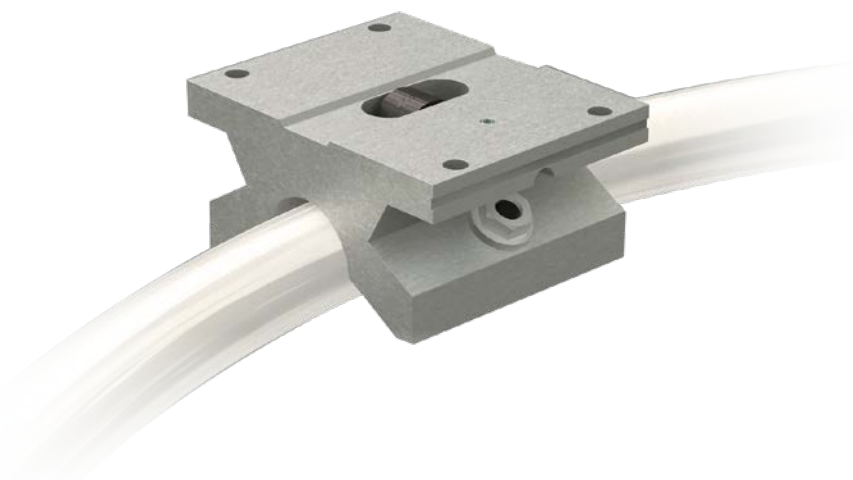

Lubrication, Rails & Bearings

The rollers are internally lubricated for life, but the rails must always have a layer of grease. As a guideline, reapply fresh grease every 50,000 cycles.

Cross Reference Guide Roller Pillow Block Bearings

Cross Reference Guide

Below is a chart that cross-references our product with competitors.

For more assistance, please consult the factory.

Standard Linear Ball Bearings

PBC Linear	PBC Linear Sealed	Thomson	Thomson Sealed	INA	INA Sealed	NB Steel Retainer	NB Steel Retainer Sealed	NB Plast'c Retainer	NB Plast'c Retainer Sealed
IP4G-0S	IP4G	A4812		KBZ04	KBZ04PP	SW4	SW4UU	SW4G	SW4GUU
IP6G-0S	IP6G	A61014		KBZ06	KBZ06PP	SW6	SW6UU	SW6G	SW6GUU
IP8G-0S	IP8G	A81420	A81420DD	KBZ08	KBZ08PP	SW8	SW8UU	SW8G	SW8GUU
IP10G-0S	IP10G	A101824		KBZ10	KBZ10PP	SW10	SW10UU	SW10G	SW10GUU
IP12G-0S	IP12G	A122026	A122026DD	KBZ12	KBZ12PP	SW12	SW12UU	SW12G	SW12GUU
IP16G-0S	IP16G	A162536	A162536DD	KBZ16	KBZ16PP	SW16	SW16UU	SW16G	SW16GUU
IP20G-0S	IP20G	A203242		KBZ20	KBZ20PP	SW20	SW20UU	SW20G	SW20GUU
IP24G-0S	IP24G	A243848		KBZ24	KBZ24PP	SW24	SW24UU	SW24G	SW24GUU
IP32G-0S	IP32G	A324864		KBZ32	KBZ32PP	SW32	SW32UU	SW32G	SW32GUU

Open Type Linear Ball Bearings

PBC Linear	PBC Linear Sealed	Thomson	Thomson Sealed	INA	INA Sealed	NB Steel Retainer	NB Steel Retainer Sealed	NB Plast'c Retainer	NB Plast'c Retainer Sealed
IP8G-OP-0S	IP8G-OP	OPN81420	OPN81420DD	KBZ08OP	KBZ08OPPP	SW8OP	SW8OPUU	SW8GOP	SW8GOPUU
IP10G-OP-0S	IP10G-OP	OPN101824		KBZ10OP	KBZ10OPPP	SW10OP	SW10OPUU	SW10GOP	SW10GOPUU
IP12G-OP-0S	IP12G-OP	OPN122026	OPN122026DD	KBZ12OP	KBZ12OPPP	SW12OP	SW12OPUU	SW12GOP	SW12GOPUU
IP16G-OP-0S	IP16G-OP	OPN162536	OPN162536DD	KBZ16OP	KBZ16OPPP	SW16OP	SW16OPUU	SW16GOP	SW16GOPUU
IP20G-OP-0S	IP20G-OP	OPN203242		KBZ20OP	KBZ20OPPP	SW20OP	SW20OPUU	SW20GOP	SW20GOPUU
IP24G-OP-0S	IP24G-OP	OPN243848		KBZ24OP	KBZ24OPPP	SW24OP	SW24OPUU	SW24GOP	SW24GOPUU
IP32G-OP-0S	IP32G-OP	OPN324864		KBZ32OP	KBZ32OPPP	SW32OP	SW32OPUU	SW32GOP	SW32GOPUU



High Load Self Aligning Linear Ball Bearings

PBC Linear	Thomson	INA	NB
IPS6	SUPER6	KX6PP	TW6UU
IPS8	SUPER8	KX8PP	TW8UU
IPS10	SUPER10	KX10PP	TW10UU
IPS12	SUPER12	KX12PP	TW12UU
IPS16	SUPER16	KX16PP	TW16UU
IPS20	SUPER20	KX20PP	TW20UU
IPS24	SUPER24	KX24PP	TW24UU
IP8-OP	SUPER80PN	KX08PP	TW80PUU
IP10-OP	SUPER100PN	KX010PP	TW100PUU
IP12-OP	SUPER120PN	KX012PP	TW120PUU
IP16-OP	SUPER160PN	KX016PP	TW160PUU
IP20-OP	SUPER200PN	KX020PP	TW200PUU
IP24-OP	SUPER240PN	KX024PP	TW240PUU

PBC Linear	Thomson	INA	NB
IPPS08-GL	SPB8UU	KGX8PP	TWA8UU
IPPS10-GL	SPB10UU	KGX10PP	TWA10UU
IPPS12-GL	SPB12UU	KGX12PP	TWA12UU
IPPS16-GL	SPB16UU	KGX16PP	TWA16UU
IPPS20-GL	SPB20UU	KGX20PP	TWA20UU
IPPS24-GL	SPB24UU	KGX24PP	TWA24UU
IPPNS08-GLP	SPB80PN	KGX08PP	TWD8UU
IPPNS10-GLP	SPB100PN	KGX010PP	TWD10UU
IPPNS12-GLP	SPB120PN	KGX012PP	TWD12UU
IPPNS16-GLP	SPB160PN	KGX016PP	TWD16UU
IPPNS20-GLP	SPB200PN	KGX020PP	TWD20UU
IPPNS24-GLP	SPB240PN	KGX024PP	TWD24UU



Consult Factory • 800-962-8979

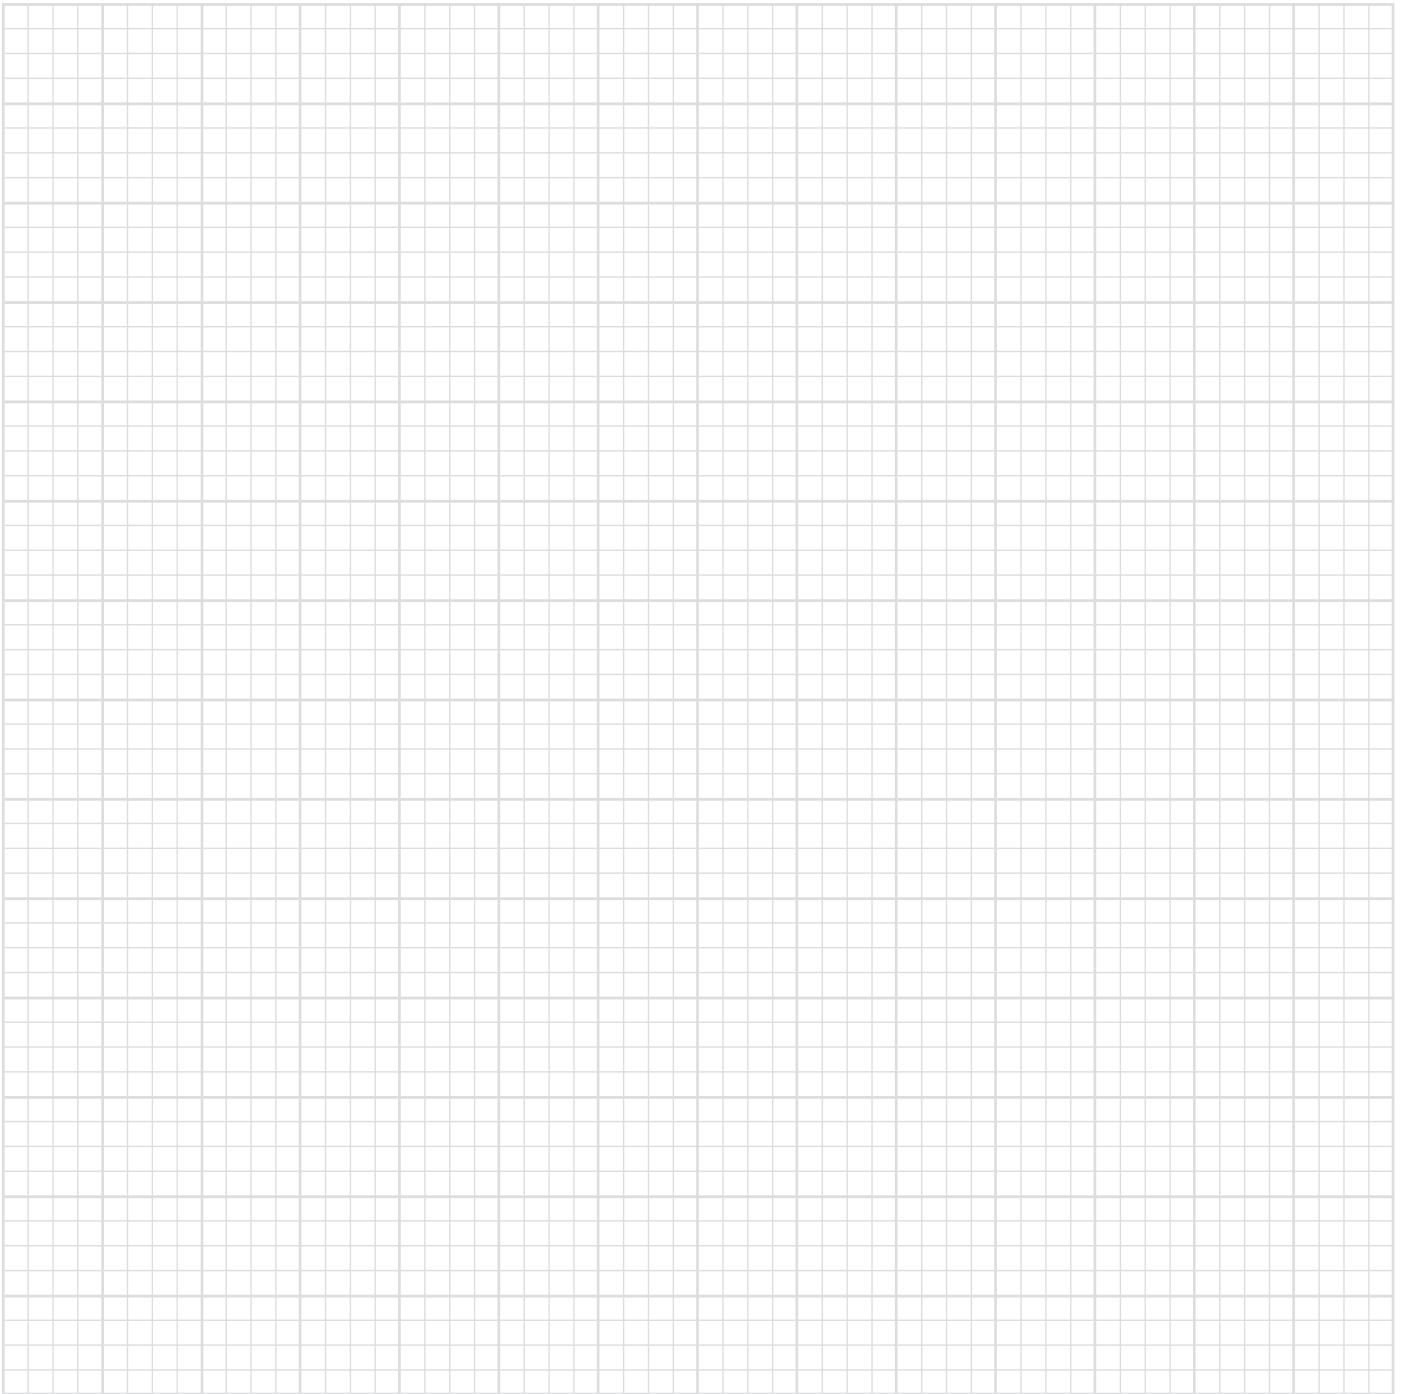



A Pacific Bearing Company

Engineering Your Linear Motion Solutions



Global Footprint



PBC Linear Worldwide Headquarters

6402 E. Rockton Road, Roscoe, Illinois 61073 USA

Tel: +1.815.389.5600 • Toll-Free: +1.800.962.8979

Fax: +1.815.389.5790

sales@pbclinear.com • pbclinear.com

PBC Linear Europe GmbH European Headquarters

Bonner Straße 363, 40589 Duesseldorf, Germany

Tel: +49 211 545590 20 • Fax: +49 211 545590 39

info@pbclinear.eu • pbclinear.eu

PBC-MOONS China Headquarters

168 Mingjia Road, Minhang District, Shanghai 201107, P.R. China

Tel: +86 21 52634688 • Fax: +86 21 52634098

info@moons.com.cn • www.moons.com.cn

Range of Offerings



Request a FREE Product Sample



Simplicity Metric FM08
8 mm Aluminum Shaft

Simplicity Inch FL08
1/2" Aluminum Shaft

Simplicity Inch FL08
Stainless Steel RC 50 Shaft

pbclinear.com/Contact-Us/Sample-Request

Distributed by

PBC Linear has a global network of distributors with thousands of locations worldwide.

Visit **pbclinear.com** to find a distributor near you.

All information within this catalog is correct at the time of printing. However, in some instances adjustments need to be made, and this may cause specific information to become outdated. For the most current version, please reference our online catalog through the resources menu at pbclinear.com.

©2014 PBC Linear®, A Pacific Bearing Company • "PBC Linear" and "PBC Lineartechnik GmbH" are subsidiaries of Pacific Bearing Company ("PBC"). Specifications are subject to change without notice. It is the responsibility of the user to determine and ensure the suitability of PBC's products for a specific application. PBC's only obligation will be to repair or replace, without charge, any defective components if returned promptly. No liability is assumed beyond such replacement. Other corporate and product names, images, text and logos may be trademarks or copyrights of other companies and are used only for explanation and to the owners benefit; without intent to infringe. This document may not be reproduced, in part or whole, without the prior written authorization of PBC. Consult pbclinear.com for the latest technical updates.

LITRST-006 v44 (03-2026)