

SPECIFICATIONS

Features:

- Highly Flexible
- Durable
- Low Cost

Material:

• 98A Polyurethane

Max Operating Pressure:

• 120 PSI @75° F (24° C)

Burst Pressure:

• 325 PSI @75° F (24° C)

Operating Temp:

• 14° F - 158° F (-10° C - 70° C)

Usages:

- Air
- Oil
- Water

Recommended Fittings:

- Push-In
- Barb
- Compression


HOW TO ORDER

PART NUMBER	TUBE SIZE	LENGTH	
INCH SIZES			
FLEX-532200M	5/32" OD X 3/32" ID	200M	
FLEX-14200M	1/4" OD X 0.160" ID	200M	
FLEX-516100M	5/16" OD X 0.197" ID	100M	
FLEX-38100M	3/8" OD X 0.245" ID	100M	
FLEX-12100M	1/2" OD X .320" ID	100M	
PLEASE COMPLETE THE PART NUMBER WITH THE COLOR CODE BELOW			

METRIC SIZES			
FLEX-4M200M	4MM OD X 2.5MM ID	200M	
FLEX-6M200M	6MM OD X 4MM ID	200M	
FLEX-8M100M	8MM OD X 5MM ID	100M	
FLEX-10M100M	10MM OD X 6.5MM ID	100M	
FLEX-12M100M	12MM OD X 8MM ID	100M	
PLEASE COMPLETE THE PART NUMBER WITH THE COLOR CODE BELOW			

COLOR CODES

NB = BLUE, BK = BLACK, C = CLEAR, R = RED EXAMPLE: FLEX-14-NB-200M = 200 METER ROLL OF 1/4" OD BLUE







Our world-class tubing is ideal for a wide variety of purposes. We pride ourselves on its high degree of flexibility which makes it easy to use and install. Our tubing is durable and dependable which allows it to thrive in demanding environments such as automation, food and beverage and medical applications.






The Reels tubing program offers top of the line Floflex polyurethane tubing in same diameter sturdy plastic reels.

Because the reel diameter is the same, Floflex tubing is easier to store, organize and use than tubing that comes on cardboard or various sized reels.

REEL DIMENSIONS

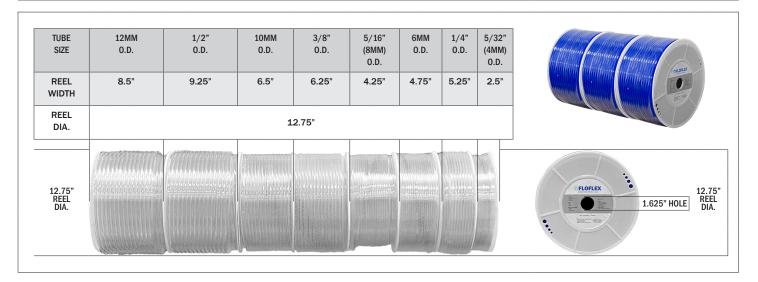

TUBE RACKS

We also offer a variety of tube racks to help manage your tubing and create a more productive work area. From simple low cost designs to complete custom designs, we have the tube rack you need. Contact us to find out more.

