
BNRV Blow-off non-return valve

- Ideal for decentralised applications where a quick release of the manipulated object is required
- Prevents suction through the blow-off lines
- Reduced feed pressure for full valve opening



Application example

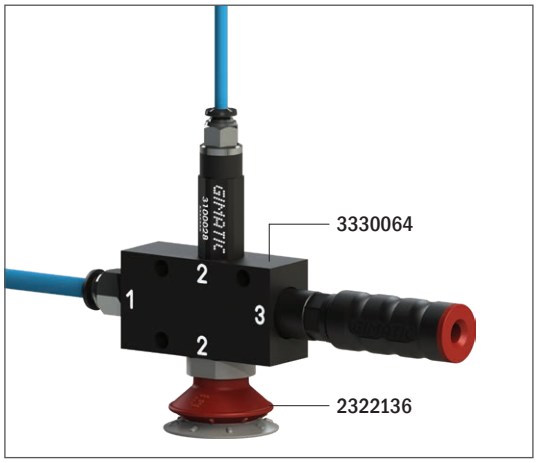

Technical features	
Pressure range	0.1 ÷ 0.6 MPa
Weight	13 g
Material	CuZn, SS, Al, EPDM, nitrile (NBR)
Temperature range	-20 ÷ +100 °C

Ordering information		
Alphanumeric code	Description	Order code
BNRV	Blow-off non-return valve	3100028

