

VG.FP15S multi-bellows suction cups in FDA-compliant silicone

- Ideal for handling packaged snack foods
- Suitable for level compensation
- High vertical movement, useful for separating thin parts
- Food-grade silicone compound (FDA-approved)

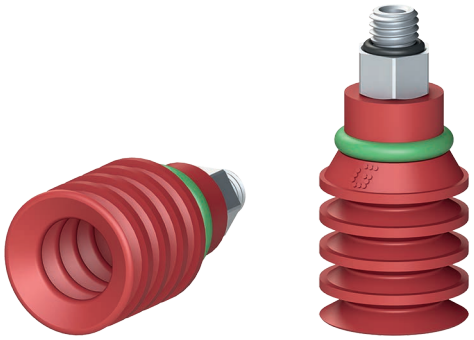

Application example

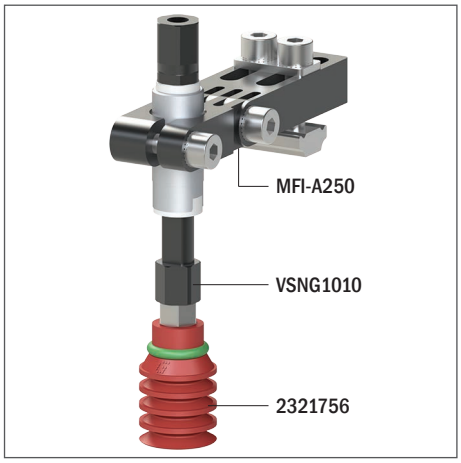

Technical data


Material	Lifting force [N] perpendicular to the surface, at various vacuum levels			Lifting force [N] parallel to the surface, at various vacuum levels			Volume	Min curve radius	Max vertical movement	Suction cup weight
	-20 kPa	-60 kPa	-90 kPa	-20 kPa	-60 kPa	-90 kPa	[cm³]	[mm]	[mm]	[g]
SIL 50 FDA	0.20	0.23	–	–	–	–	1.05	2	8	0.9

Technical features

Material	Colour	Hardness	Temperature range
Silicone, SIL FDA	Red	50 Shore	-70 ÷ +200 °C


Identification codes			
Drawing	Alphanumeric code	Suction cups with fitting	Order code
A	VG.FP15S.50.M5M	VG.FP15 suction cup, FDA-compliant silicone, 50 Shore, M5 male	2321756

A




Identification codes			
Drawing	Alphanumeric code	Suction cups	Order code
A	VG.FP15S.50	VG.FP15 suction cup, FDA-compliant silicone, 50 Shore	2322052

A



Identification codes			
Drawing	Alphanumeric code	Fittings	Order code
A	FT.M5M	M5 male fitting	1600005

A



Identification codes			
Alphanumeric code	Disc	Order code	
AC.DF15	Perforated disc for thin films, diameter 15 mm	2321782	