
Suction cups / FDA-compliant silicone with ring in silicone foam

VG.LB33F.SFO bellows suction cups in FDA-compliant silicone with silicone foam ring

- Ideal to handle uneven and porous surfaces
- High adaptability on rough wood panels, corrugated sheet metal and non-slip sheet metal
- Ring in mark-free silicone foam
- They enable to compensate for differences in height



Application example

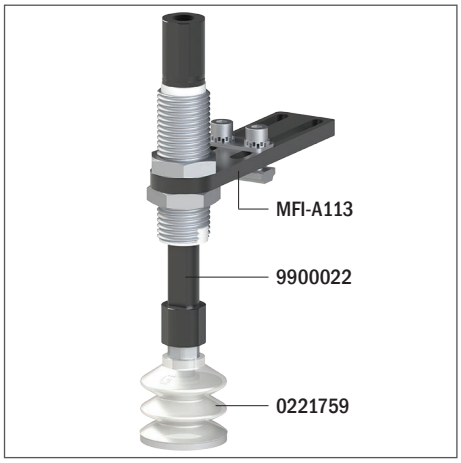


Technical features		
Material	**Colour**	**Temperature range**
Silicone, SIL FDA (suction cup)	Transparent	-55 ÷ +200 °C
Silicone foam, SIL (ring)	White	-55 ÷ +200 °C


Identification codes

Drawing	Alphanumeric code	Suction cups with fitting	Order code
A	VG.LB33F.50.G18F.E12.SFO	VG.LB33 suction cup, FDA-compliant silicone, 50 Shore, G1/8" female, 12 mm hex with silicone foam ring	0221757
B	VG.LB33F.50.G18M.E12.SFO	VG.LB33 suction cup, FDA-compliant silicone, 50 Shore, G1/8" male, 12 mm hex with silicone foam ring	0221759
C	VG.LB33F.50.G18F.E16.SFO	VG.LB33 suction cup, FDA-compliant silicone, 50 Shore, G1/8" female, 16 mm hex with silicone foam ring	0221760
D	VG.LB33F.50.G18M.E16.SFO	VG.LB33 suction cup, FDA-compliant silicone, 50 Shore, G1/8" male, 16 mm hex with silicone foam ring	0221761
E	VG.LB33F.50.G14F.E16.SFO	VG.LB33 suction cup, FDA-compliant silicone, 50 Shore, G1/4" female, 16 mm hex with silicone foam ring	0221762
F	VG.LB33F.50.G14M.E17.SFO	VG.LB33 suction cup, FDA-compliant silicone, 50 Shore, G1/4" male, 17 mm hex with silicone foam ring	0221763


A




B




C




D



E




F



Identification codes

Drawing	Alphanumeric code	Suction cups	Order code
A	VG.LB33F.50.SFO	VG.LB33 suction cup, FDA-compliant silicone, 50 Shore, with silicone foam ring	**0221758**


A




Ordering information

Drawing	Alphanumeric code	Fittings	Order code
A	FT.G18F.E12	G1/8" female fitting, 12 mm hex	**2321422**
B	FT.G18M.E12	G1/8" male fitting, 12 mm hex	**2321424**
C	FT.G18F.E16	G1/8" female fitting, 16 mm hex	**2321426**
D	FT.G18M.E16	G1/8" male fitting, 16 mm hex	**2321428**
E	FT.G14F.E16	G1/4" female fitting, 16 mm hex	**2321430**
F	FT.G14M.E17	G1/4" male fitting, 17 mm hex	**2321432**
G	FT.G18M.S55.E16	Fitting G1/8" Male with check valve and calibrated hole diameter, hexagon 16 mm	**1600020**
H	FT.G14M.S75.E17	Fitting G1/4" Male with check valve and calibrated hole diameter, hexagon 17 mm	**1600021**


A




B




C




D




E



F



G



H

