
VG.BR20X45 rectangular bellows suctions cups in polyurethane

- Suitable for handling snack foods and food bars in flow packs
- Version with 1.5 bellows
- Ideal for picking up an object and placing it on its side
- Thin lip capable of adapting perfectly to the plastic film



Application example

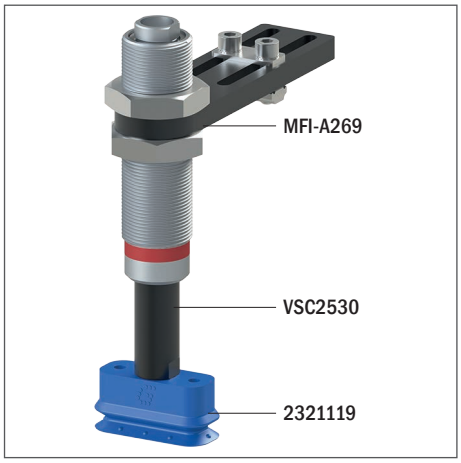

Technical data

Material	Lifting force [N] perpendicular to the surface, at various vacuum levels			Lifting force [N] parallel to the surface, at various vacuum levels			Volume	Min curve radius	Max vertical movement	Suction cup weight
	-20 kPa	-60 kPa	-90 kPa	-20 kPa	-60 kPa	-90 kPa	[cm³]	[mm]	[mm]	[g]
PU50	15.2	26.4	39.3	21.2	33.4	54	6.1	15	6	7.5


Technical features

Material	Colour	Hardness	Temperature range
Polyurethane PU50 Shore	Blue	50 Shore	+10 ÷ +45 °C


Identification codes

Drawing	Alphanumeric code	Suction cups with fitting	Order code
A	VG.BR20X45P.50.G14F	VG.BR20X45 suction cup, polyurethane, 50 Shore, G1/4" Female	2322119
B	VG.BR20X45P.50.G18M	VG.BR20X45 suction cup, polyurethane, 50 Shore, G1/8" revolving male	2321119
C	FT.G18M.E5.ROT	G1/8" revolving male fitting	1900020


A

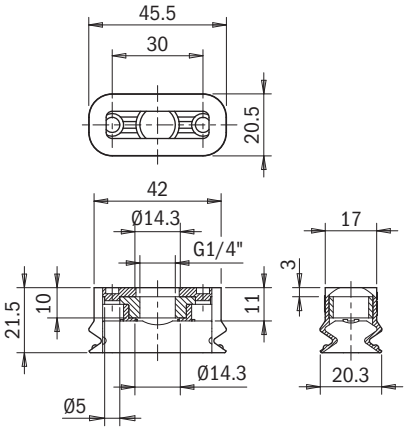

B

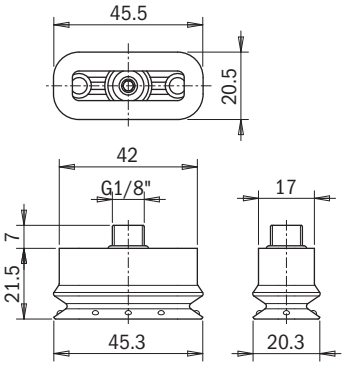

C



Assembly sequence

