
VG.GX15P suction cups in polyurethane

- Suitable for compensating for different heights
- Ideal for handling items with porous and uneven surface
- Features an exceptional elastic memory
- Available with 50 Shore hardness, green colour
- Available with 30/60 Shore hardness. The two-colour suction cup is robust and flexible at the same time



Application example

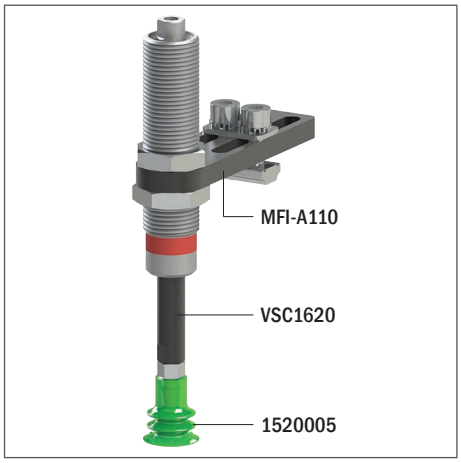

Technical data


Material	Lifting force [N] perpendicular to the surface, at various vacuum levels			Lifting force [N] parallel to the surface, at various vacuum levels			Volume	Min curve radius	Max vertical movement	Suction cup weight
	-20 kPa	-60 kPa	-90 kPa	-20 kPa	-60 kPa	-90 kPa	[cm³]	[mm]	[mm]	[g]
PU30/60	2.9	6.9	5.5	–	–	–	0.92	5.5	5.5	0.9
PU50	3.2	9.1	6.2	–	–	–	0.92	6	5.5	0.9

Technical features

Material	Colour	Hardness	Temperature range
Polyurethane PU, 30/60 Shore	Yellow / Green	30/60 Shore	+10 ÷ +45 °C
Polyurethane PU, 50 Shore	Green	50 Shore	+10 ÷ +45 °C


Identification codes			
Drawing	Alphanumeric code	Suction cups with fitting	Order code
A	VG.GX15P.30/60.M5M	VG.GX15P suction cup, polyurethane, 30/60 Shore, M5 male	**1510005**
A	VG.GX15P.50.M5M	VG.GX15P suction cup, polyurethane, 50 Shore, M5 male	**1520005**

A



Identification codes			
Drawing	Alphanumeric code	Suction cups	Order code
B	VG.GX15P.30/60	VG.GX15P suction cup, polyurethane, 30/60 Shore	**1510000**
B	VG.GX15P.50	VG.GX15P suction cup, polyurethane, 50 Shore	**1520000**

B



Identification codes			
Drawing	Alphanumeric code	Fittings	Order code
A	FT.M5M	M5 male fitting	**1600005**

A

